

MS903

Backhoe Industrial Service

The aggressive, self-cleaning, flat tread provides high traction, excellent stability and durability in tough & demanding applications.


- Excellent grip
- Wear & cut resistant tread compound
- Specially designed domed mud breakers for optimum self-cleaning
- Reduced vibration & increased stability
- Deep under tread for improved puncture resistance
- Protected sidewall for increased cut resistance



Applications



Footprint

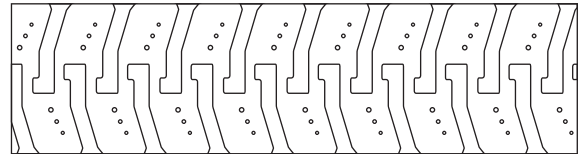

Size	PR	Type	Rim	LI / SR	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
18.4-26 (480/80-26)	12	TL	W16L	156A8	in.	36/32	18.8	56.3
					mm	29	478	1430
18.4-26 (480/80-26)	16	TL	W16L	162A8	in.	36/32	18.8	56.3
					mm	29	478	1430
16.9-28 (440/80-28)	12	TL	W15L	152A8	in.	34/32	17.2	55.5
					mm	27	438	1409
16.9-28 (440/80-28)	14	TL	W15L	155A8	in.	34/32	17.2	55.5
					mm	27	438	1409
16.9-30 (420/85-30)	12	TL	W15L	153A8	in.	34/32	17.1	57.5
					mm	27	435	1460
16.9-30 (420/85-30)	14	TL	W15L	156A8	in.	34/32	17.1	57.5
					mm	27	435	1460
18.4-30 (460/85-30)	12	TL	W16L	158A8	in.	36/32	18.5	60.2
					mm	29	470	1530
18.4-30 (460/85-30)	14	TL	W16L	160A8	in.	36/32	18.5	60.2
					mm	29	470	1530