

# MS909

## MPT

The aggressive, self-cleaning tread provides high traction and durability in tough & demanding applications.


- Wear & cut resistant tread compound
- Specially designed domed mud breakers for enhanced self-cleaning
- Reduced vibration & increased stability
- Excellent grip and increased traction
- Deep under tread for improved puncture resistance
- Protected sidewall for increased cut resistance



### Applications



### Footprint

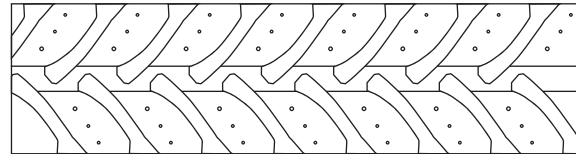

Size	PR	Type	Rim	LI / SR	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
405/70-20 (16/70-20)	12	TL	13.00	144A8	in.	42/32	16.2	42.4
					mm	33	412	1078
405/70-20 (16/70-20)	14	TL	13.00	149B	in.	42/32	16.2	42.4
					mm	33	412	1078
405/70-20 (16/70-20)	16	TL	13.00	152B	in.	42/32	16.2	42.4
					mm	33	412	1078
405/70-24 (16/70-24)	14	TL	13.00	151A8	in.	42/32	15.9	46.2
					mm	33	405	1175
405/70-24 (16/70-24)	16	TL	13.00	156B	in.	42/32	15.9	46.2
					mm	33	405	1175