

# MS951R

## AGRIXTRA


### Agricultural Tire

- Full range of sizes available for medium horsepower tractors
- Balanced modern tread pattern and sidewall design for all-round performance
- Proven construction for tire durability and comfort
- Same load capacity at 40 and 50 km/h for 85 and 70 series
- 65 series developed for applications at 65 km/h

#### Applications



#### Footprint

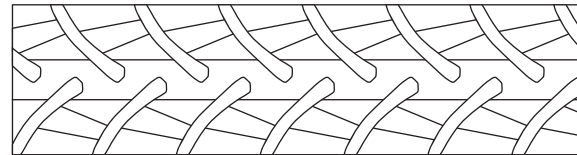

Size	LI / SS	Type	Rim	Tire Dimensions		
				Tread Depth (mm)	Section Width (mm)	Overall Diameter (mm)
280/85R24 (11.2R24)	115A8 / 115B	TL	10.00	40	292	1086
320/85R24 (12.4R24)	122A8 / 122B	TL	11.00	41	329	1154
340/85R24 (13.6R24)	125A8 / 125B	TL	12.00	42	353	1188
380/85R24 (14.9R24)	131A8 / 131B	TL	13.00	43	390	1256
420/85R24 (16.9R24)	137A8 / 137B	TL	15.00	46	438	1324
280/85R28 (11.2R28)	118A8 / 118B	TL	10.00	40	292	1187
320/85R28 (12.4R28)	124A8 / 124B	TL	11.00	41	329	1255
340/85R28 (13.6R28)	127A8 / 127B	TL	12.00	42	353	1289
380/85R28 (14.9R28)	133A8 / 133B	TL	13.00	43	390	1357
420/85R28 (16.9R28)	139A8 / 139B	TL	15.00	46	438	1425
380/85R30 (14.9R30)	135A8 / 135B	TL	13.00	43	390	1408
420/85R30 (16.9R30)	140A8 / 140B	TL	15.00	50	438	1476
420/85R34 (16.9R34)	142A8 / 142B	TL	15.00	50	438	1578
460/85R34 (18.4R34)	147A8 / 147B	TL	16.00	51	475	1646
340/85R36 (13.6R36)	132A8 / 132B	TL	12.00	46	353	1492
340/85R38 (13.6R38)	133A8 / 133B	TL	12.00	46	353	1543
420/85R38 (16.9R38)	144A8 / 144B	TL	15.00	50	438	1679
460/85R38 (18.4R38)	149A8 / 149B	TL	16.00	51	475	1747
520/85R38 (20.8R38)	155A8 / 155B	TL	18.00	53	536	1849
520/85R42 (20.8R42)	157A8 / 157B	TL	18.00	53	536	1951
360/70R24	122A8 / 122B	TL	12.00	40	367	1152
380/70R24	125A8 / 125B	TL	13.00	41	390	1190
420/70R24	130A8 / 130B	TL	14.00	42	428	1248
380/70R28	127A8 / 127B	TL	13.00	41	390	1293
420/70R28	133A8 / 133B	TL	14.00	42	428	1349
480/70R28	140A8 / 140B	TL	16.00	44	489	1421
480/70R30	141A8 / 141B	TL	16.00	48	489	1478
480/70R34	143A8 / 143B	TL	16.00	48	489	1580
520/70R38	150A8 / 150B	TL	18.00	50	536	1749
580/70R38	155A8 / 155B	TL	18.00	56	577	1827
480/65R24	133D / 136A8	TL	15.00	43	479	1234
440/65R28	131D / 134A8	TL	15.00	42	452	1283
480/65R28	136D / 139A8	TL	15.00	43	479	1335
540/65R28	142D / 145A8	TL	18.00	46	550	1413
540/65R30	143D / 146A8	TL	18.00	50	550	1464
600/65R38	153D / 156A8	TL	20.00	51	611	1745
650/65R38	157D / 160A8	TL	20.00	56	645	1810
650/65R42	158D / 161A8	TL	20.00	56	645	1912
620/75R26 (23.1LR26)	166A8 / 166B	TL	20.00	52	625	1590