



High flotation R3 pattern provides minimal ground compaction while providing excellent traction in field and paving applications.

- ▶ Excellent traction in all conditions
- ▶ Thick undertread for improved puncture resistance
- ▶ Low pressure minimizes soil disturbance
- ▶ Wear and cut-resistant tread compound

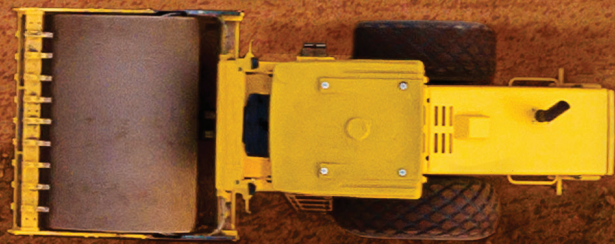

TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



SIZE	P.R.	TYPE	RIM	O.D.	S.W.	T.D.	INFLATION PRESSURE	L.C.C. (lbs/kg)		L.I.
				in	in	32nds		5 mph	25 mph	
				mm	mm	mm		10 kph	40 kph	
23.1-26	12	TL	DW20	61.7	23.1	23	32	13400	8550	155A8
				1570	587	18	220	6100	3875	
28L-26	16	TL	DW25	62.6	28.2	34	36	17000	10500	162A8
				1590	717	27	250	7710	4750	

