


Deep, non-directional traction pattern for telehandler and grader use.

- ▶ Excellent traction in all off-road conditions
- ▶ Thick undertread for improved puncture resistance
- ▶ Wear and cut-resistant tread compound
- ▶ Wide, flat footprint profile for maximum stability and wear
- ▶ Increased net-to-gross and tread depth for highest tread life



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

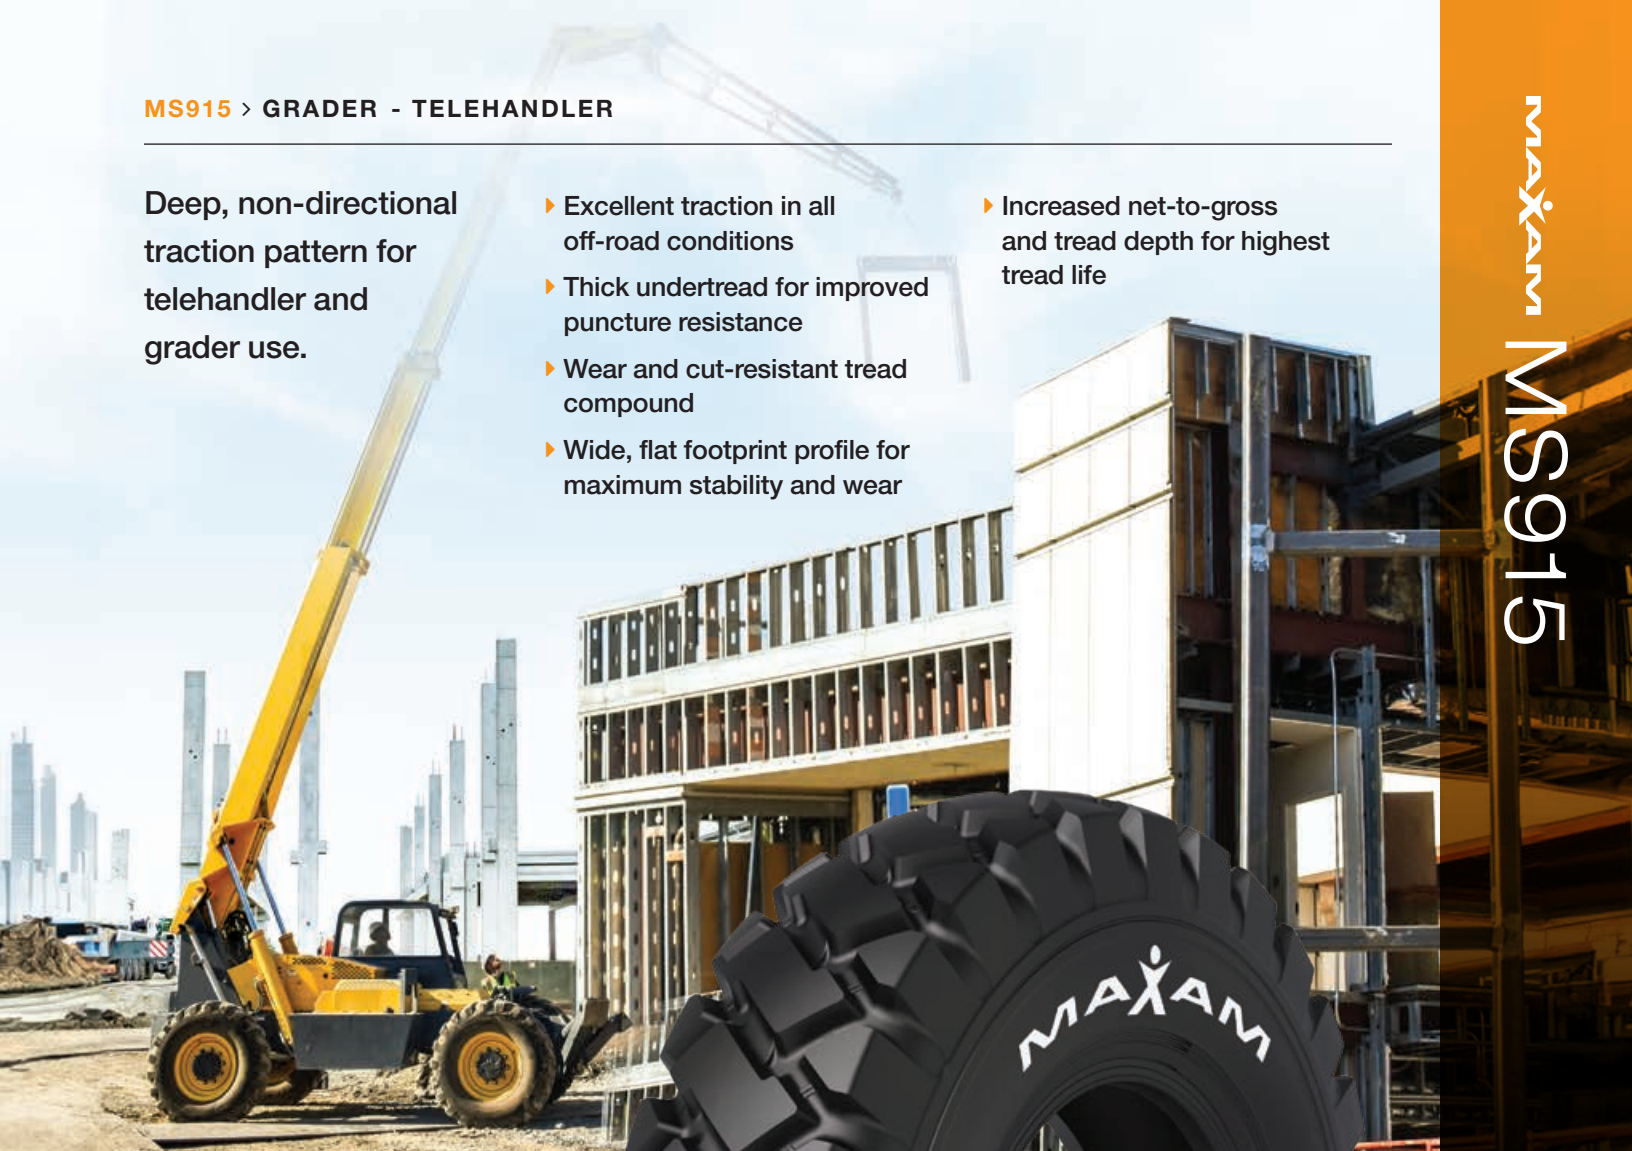

SIZE	P.R.	TYPE	RIM	ALT. RIM	O.D.	S.W.	T.D.	INFLATION PRESSURE	L.C.C. (Lbs/ke)	INFLATION PRESSURE	L.C.C. (Lbs/ke)	L.I.	
					in	in	32nds	psi	5 mph	psi	25 mph		
					mm	mm	mm	KPa	10 kph	KPa	40 kph		
13.00-24	12	TL	10.00VA	8.00TG	50.3	13.1	31	65	12300	44	6000	168A2/ 143A8	
					1278	333	25	450	5600	300	2725		
	16	TL	10.00VA	-	50.3	13.1	31	87	14300	58	7150		173A2/ 149A8
					1278	333	25	600	6500	400	3250		
14.00-24	12	TL	10.00VA	8.00TG	53.1	14.3	34	62	13900	36	6800	172A2/ 147A8	
					1349	363	27	425	6300	250	3075		
	16	TL	10.00VA	-	53.1	14.3	34	80	16100	51	8050		177A2/ 153A8
					1349	363	27	550	7300	350	3650		
370/75-28	14	TL	11.00GR	-	50.3	14.5	42	73	12000	47	7150	167A2/ 149A8	
					1278	368	33	500	5450	325	3250		
400/75-28	16	TL	12.00GR	-	52.3	15.7	42	76	14300	51	8550	173A2/ 155A8	
					1328	400	33	525	6500	350	3875		

