


The **MX200L** is our premium steer tire for highway line haul applications. Featuring the EcoPoint<sup>3</sup> compound technology, the **MX200L** guarantees optimized mileage, fuel economy and traction without compromising performance. Engineered for control and comfort with a decoupling groove and five wide ribs, the **MX200L** features micro-snipes for enhanced traction and safety in wet conditions.




-  **FUEL ECONOMY**
-  **WET TRACTION**
-  **EXCELLENT RETREADABILITY**


EXPERIENCE THE  
  
EcoPoint<sup>3</sup>  
TECHNOLOGY

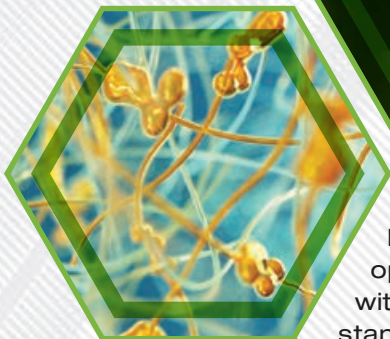

The MX200L is engineered with our proprietary EcoPoint<sup>3</sup> compound technology. EcoPoint<sup>3</sup> optimizes mileage, fuel economy and wet traction without compromising performance, setting a new standard for long-haul application.

 **UNMATCHED WET TRACTION FOR THE HIGHEST PERFORMANCE**

 **MAXIMUM WEAR RESISTANCE FOR LONGEST TIRE LIFE**

 **MINIMUM ROLLING RESISTANCE FOR OPTIMAL FUEL ECONOMY**



**UNPARALLELED STABILITY**

With a design with five wide ribs to evacuate water in wet conditions.


**EcoPoint<sup>3</sup> TECHNOLOGY COMPOUND**

Patented EcoPoint<sup>3</sup> compound technology enables maximum fuel efficiency and wet traction and conserves energy for enhanced rolling resistance.

**MINIMUM IRREGULAR WEAR**

Decoupling groove to minimize irregular wear, ensuring maximum performance.

**HEAVY-DUTY BEAD CONSTRUCTION**

Ensures proper mounting and even pressure for maximum casing durability and life.

**REINFORCED STEEL BELT PACKAGE**

Maximize durability and retreadability.

CODE	SIZE	LI	SR	PR	TD	RIM	OD	SW	SLR	LCC 1X	LCC 2X
V220004	11R22.5	144/142	M	14PR	19	8.25	41.9	11.0	19.3	6175@105	5840@105
V220000	11R22.5	146/143	M	16PR	19	8.25	41.9	11.0	19.3	6610@120	6005@120
V220005	11R24.5	146/143	M	14PR	19	8.25	43.5	11.0	20.3	6610@105	6005@105
V220001	11R24.5	149/146	M	16PR	19	8.25	43.5	11.0	20.3	7160@120	6610@120
V220002	285/75R24.5	144/141	M	14PR	19	8.25	41.3	11.1	19.4	6175@110	5675@110
V220003	295/75R22.5	144/141	M	14PR	19	9.00	39.9	11.7	18.7	6175@110	5675@110
V220006	295/75R22.5	146/143	M	16PR	19	9.00	39.9	11.7	18.7	6610@120	6005@120