



MAXAM
AGRICULTURAL TIRE DATABOOK





| | |
|-------------------|----|
| AGRIXTRA 85 | 4 |
| AGRIXTRA 70 | 12 |
| AGRIXTRA 65 | 18 |
| AGRIXTRA XL | 22 |
| AGRIXTRA H | 28 |
| AGRIXTRA N | 36 |
| TRACXTRA | 46 |
| AGILXTRA | 48 |
| FLOTXTRA | 52 |
| MS938 | 56 |
| MS935 | 58 |
| MS963 | 60 |
| MS965 | 62 |
| MS966 | 66 |
| MS909R | 68 |
| MS910R | 70 |
| CONVERSION TABLES | 74 |
| LIMITED WARRANTY | 77 |

MAXAM AGRIXTRA 85

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

Premium 45° lug profile provides excellent traction and minimizes vibration while roading. Low pressure and wide footprint lowers soil compaction.

- ▶ Radial tire construction
- ▶ Self-cleaning tread design
- ▶ Wide tread for maximized performance in the field
- ▶ Low pressure for minimal soil disturbance
- ▶ Premium rubber compounds reduce ozone cracking and weathering



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Metric Size | Alt Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. vol. gal l | # of lugs | Gross Flat Plate sq in sq cm |
|-------------|-------------|----------|---------|------|------------|--------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| 921215 | 250/85R24 | 9.5R24 | 109A8/B | TL | W8 | W7,W9 | 9.9 | 251 | 40.8 | 1035 | 18.5 | 471 | 121.9 | 3095 | 35 500 | 48 38 | 86 39 | 14.8 56 | 19 x 2 | 109 701 |
| | 280/85R20 | 11.2R20 | | | | | | | | | | | | | | | | | | |
| V951000 | 280/85R24 | 11.2R24 | 115A8/B | TL | W10 | W9 | 11.5 | 292 | 42.8 | 1086 | 19.3 | 491 | 127.9 | 3247 | 36 525 | 50 40 | 99 45 | 20.6 78 | 19 x 2 | 128 827 |
| V951002 | 320/85R24 | 12.4R24 | 122A8/B | TL | W11 | W10 | 13 | 329 | 45.4 | 1154 | 20.4 | 517 | 135.9 | 3450 | 37 550 | 52 41 | 121 55 | 28.8 109 | 19 x 2 | 158 1021 |
| V951004 | 340/85R24 | 13.6R24 | 125A8/B | TL | W12 | W11 | 13.9 | 353 | 46.8 | 1188 | 20.9 | 530 | 139.9 | 3552 | 37 575 | 53 42 | 135 61 | 33.8 128 | 19 x 2 | 174 1123 |
| V951008 | 380/85R24 | 14.9R24 | 131A8/B | TL | W13 | W12 | 15.4 | 390 | 49.5 | 1256 | 21.9 | 557 | 147.9 | 3755 | 39 600 | 54 43 | 168 76 | 44.6 169 | 19 x 2 | 206 1328 |
| V951011 | 420/85R24 | 16.9R24 | 137A8/B | TL | W15L | W14L, DW14L, DW15L | 17.2 | 438 | 52.1 | 1324 | 23 | 583 | 155.9 | 3959 | 40 625 | 58 46 | 203 92 | 58.1 220 | 20 x 2 | 243 1566 |
| 951001 | 280/85R28 | 11.2R28 | 118A8/B | TL | W10 | W9 | 11.5 | 292 | 46.7 | 1187 | 21.3 | 541 | 139.7 | 3549 | 37 575 | 50 40 | 114 52 | 23.2 88 | 19 x 2 | 139 899 |
| 951003 | 320/85R28 | 12.4R28 | 124A8/B | TL | W11 | W10 | 13 | 329 | 49.4 | 1255 | 22.4 | 568 | 147.7 | 3752 | 39 600 | 52 41 | 134 61 | 32.2 122 | 19 x 2 | 169 1089 |
| V951005 | 340/85R28 | 13.6R28 | 127A8/B | TL | W12 | W11 | 13.9 | 353 | 50.8 | 1289 | 22.9 | 581 | 151.8 | 3854 | 39 625 | 53 42 | 150 68 | 38 144 | 20 x 2 | 185 1191 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued



| Item Number | Metric Size | Alt Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. vol. gal l | # of lugs | Gross Flat Plate sq in sq cm |
|-------------|-------------|----------|---------|------|------------|--------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951009 | 380/85R28 | 14.9R28 | 133A8/B | TL | W13 | W12 | 15.4 | 390 | 53.4 | 1357 | 23.9 | 607 | 159.8 | 4057 | 40 650 | 54 43 | 187 85 | 49.9 189 | 20 x 2 | 217 1403 |
| V951012 | 420/85R28 | 16.9R28 | 139A8/B | TL | W15L | W14L, DW14L, DW15L | 17.2 | 438 | 56.1 | 1425 | 25 | 634 | 167.8 | 4261 | 41 675 | 58 46 | 221 100 | 64.7 245 | 20 x 2 | 256 1654 |
| V951010 | 380/85R30 | 14.9R30 | 135A8/B | TL | W13 | W12 | 15.4 | 390 | 55.4 | 1408 | 24.9 | 633 | 165.8 | 4210 | 41 675 | 54 43 | 201 91 | 52.5 199 | 20 x 2 | 230 1484 |
| V951013 | 420/85R30 | 16.9R30 | 140A8/B | TL | W15L | W14L, DW14L, DW15L | 17.2 | 438 | 58.1 | 1476 | 25.9 | 659 | 173.8 | 4413 | 42 700 | 63 50 | 238 108 | 67.1 254 | 20 x 2 | 264 1702 |
| V951020 | 460/85R30 | 18.4R30 | 145A8/B | TL | W16L | W14L, W15L | 18.7 | 475 | 60.8 | 1544 | 27 | 686 | 181.8 | 4617 | 42 725 | 64 51 | 276 125 | 83.7 317 | 20 x 2 | 306 1974 |
| V951220 | 320/85R32 | 12.4R32 | 126A8/B | TL | W11 | W9, W10 | 13 | 329 | 53.4 | 1357 | 23.4 | 619 | 159.7 | 4057 | 40 650 | 52 41 | 154 70 | 35.9 136 | 20 x 2 | 179 1157 |
| V951221 | 380/85R34 | 14.9R34 | 146A8/B | TL | W12 | W13 | 15 | 380 | 59.5 | 1510 | 23.4 | 684 | 159.7 | 4515 | 42 750 | 54 43 | 238 108 | 56.2 213 | 20 x 2 | 237 1532 |
| V951014 | 420/85R34 | 16.9R34 | 142A8/B | TL | W15L | W14L, DW14L, DW15L | 17.2 | 438 | 62.1 | 1578 | 28 | 710 | 185.8 | 4718 | 43 750 | 63 50 | 260 118 | 73.7 279 | 20 x 2 | 280 1804 |

MAXAM AGRIXTRA 85

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

Premium 45° lug profile provides excellent traction and minimizes vibration while roading. Low pressure and wide footprint lowers soil compaction.

- ▶ Radial tire construction
- ▶ Self-cleaning tread design
- ▶ Wide tread for maximized performance in the field
- ▶ Low pressure for minimal soil disturbance
- ▶ Premium rubber compounds reduce ozone cracking and weathering



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued



| Item Number | Metric Size | Alt Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. vol. gal l | # of lugs | Gross Flat Plate sq in sq cm |
|-------------|-------------|----------|---------|------|------------|--------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951016 | 460/85R34 | 18.4R34 | 147A8/B | TL | W16L | W15L, DW15L, DW16L | 18.7 | 475 | 64.8 | 1646 | 29 | 737 | 193.8 | 4922 | 44 775 | 64 51 | 298 135 | 91.9 348 | 20 x 2 | 325 2094 |
| 951210 | 320/85R36 | 12.4R36 | 128A8/B | TL | W11 | W10 | 13 | 329 | 57.4 | 1458 | 26.3 | 669 | 171.6 | 4359 | 41 700 | 52 41 | 163 74 | 39.6 150 | 20 x 2 | 190 1225 |
| 951006 | 340/85R36 | 13.6R36 | 132A8/B | TL | W12 | W11 | 13.9 | 353 | 58.8 | 1492 | 26.9 | 682 | 175.7 | 4461 | 42 725 | 58 46 | 192 87 | 45.4 172 | 21 x 2 | 211 1362 |
| 951007 | 340/85R38 | 13.6R38 | 133A8/B | TL | W12 | W11 | 13.9 | 353 | 60.8 | 1543 | 27.9 | 708 | 181.7 | 4614 | 42 750 | 58 46 | 198 90 | 47.5 180 | 21 x 2 | 217 1403 |
| V951222 | 380/80R38 | 14.9R38 | 142A8/B | TL | W12 | W11, W13 | 15 | 380 | 61.9 | 1573 | 23.4 | 720 | 159.7 | 4703 | 43 750 | 57 45 | 234 106 | 57.3 217 | 20 x 2 | 210 1353 |
| V951015 | 420/85R38 | 16.9R38 | 144A8/B | TL | W15L | W14L, DW14L, DW15L | 17.2 | 438 | 66.1 | 1679 | 30 | 761 | 197.7 | 5020 | 44 800 | 63 50 | 280 127 | 80.3 304 | 21 x 2 | 295 1906 |
| V951017 | 460/85R38 | 18.4R38 | 149A8/B | TL | W16L | W15L, DW15L, DW16L | 18.7 | 475 | 68.8 | 1747 | 31 | 788 | 205.7 | 5224 | 45 825 | 64 51 | 324 147 | 99.8 378 | 21 x 2 | 343 2213 |
| V951018 | 520/85R38 | 20.8R38 | 155A8/B | TL | DW18L | W16L, DW16L, W18L | 21.1 | 536 | 72.8 | 1849 | 32.6 | 827 | 217.7 | 5529 | 46 875 | 67 53 | 404 183 | 134.9 511 | 21 x 2 | 409 2638 |
| 951216 | 460/85R42 | 18.4R42 | 156A8/B | TL | W16L | W14L, W15L | 18.7 | 475 | 72.7 | 1846 | 33 | 837 | 217.4 | 5520 | 46 875 | 64 51 | 399 181 | 107.4 407 | 21 x 2 | 422 2723 |
| V951110 | 480/80R42 | 18.4R42 | 151A8/B | TL | W16A | W16L, DW16L | 19.3 | 489 | 72.8 | 1849 | 33 | 838 | 217.7 | 5529 | 46 875 | 64 51 | 373 169 | 111.4 422 | 21 x 2 | 364 2349 |
| V951131 | 520/85R42 | 20.8R42 | 167D | TL | DW18L | W16L, DW16L, W18L | | | 76.8 | 1951 | 34.6 | 878 | 229.7 | 5833 | 47 925 | 66.8 53 | 485 220 | 145.7 552 | 22 x 2 | 370 2305 |
| V951111 | 480/80R46 | 18.4R46 | 158A8/B | TL | W16A | W16L, DW16L, DD16L | 19.3 | 489 | 76.2 | 1936 | 34.8 | 884 | 228 | 5789 | 47 925 | 64 51 | 417 189 | 117.2 444 | 21 x 2 | 336 2170 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued



| Item Number | Metric Size | Alt Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. vol. gal l | # of lugs | Gross Flat Plate sq in sq cm |
|-------------|-------------|----------|---------|------|------------|--------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951113 | 520/85R46 | 20.8R46 | 158A8/B | TL | W16A | W18L, DW18L, DD18L | 20.3 | 516 | 80.8 | 2052 | 36.6 | 929 | 241.6 | 6135 | 48 975 | 69 55 | 496 225 | 149.2 565 | 22 x 2 | 449 2894 |
| V951224 | 480/80R50 | 18.4R50 | 176A8/B | TL | DW16L | W16L, DW15L, W15L | 19.8 | 503 | 80.4 | 2043 | 37.5 | 952 | 240 | 6094 | 48 975 | 66 52 | 549 249 | 124.9 473 | 22 x 2 | 358 2309 |
| V951500 | 480/95R50 | | 164D | TL | W15L | W16L | 18.9 | 479 | 85.9 | 2182 | 39.0 | 991 | 256.9 | 6524 | 49 1075 | 67 53 | 494 224 | 155.2 588 | 28.2 x 2 | 396 2553 |

TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS **VF/SERIES**

| Item Number | Metric Size | Alt Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. vol. gal l | # of lugs | Gross Flat Plate sq in sq cm |
|-------------|-------------|----------|---------|------|------------|--------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| - | VF380/80R38 | - | 167D | TL | W12 | DW12 | 14.8 | 377 | 62.2 | 1579 | 28.3 | 720 | 187 | 4750 | 43 750 | 58 46 | 284 129 | 54 203 | 24 x 2 | 269 1734 |
| - | VF580/85R42 | - | 183D | TL | DW18L | DW20B, DW21B | 22.6 | 575 | 80 | 2031 | 35.2 | 894 | 241.8 | 6142 | 48 975 | 68 54 | 686 311 | 167.6 635 | 22 x 2 | 596 3846 |
| - | VF480/80R46 | - | 177D | TL | DW16L | DW15L | 19.1 | 486 | 76.2 | 1936 | 35 | 890 | 230 | 5843 | 47 925 | 52 41 | 472 214 | 113.3 429 | 30 x 2 | 400 2583 |
| - | VF480/80R50 | - | 185D | TL | DW16L | DW15L | 19 | 483 | 80.3 | 2039 | 37.2 | 944 | 241.9 | 6143 | 48 975 | 62 49 | 529 240 | 117.5 445 | 30 x 2 | 448 2890 |
| V951517 | VF480/95R50 | - | 170D | TL | DW16 | DW15 | 19.8 | 502 | 85.9 | 2182 | 38.7 | 984 | 254.5 | 6464 | 49 1075 | 67 53 | 534 242 | 156.7 593 | 28 x 2 | 586 3782 |

MAXAM AGRIXTRA 85

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

AGRIXTRA 85 LOAD AND INFLATION

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | | | | |
|-------------|---------------|---------|-------------------------|---|-----------|-----------|-----------|-----------|-----------|-----------|---------|--------|---------|---------|---------|-----------|---------|--|
| | | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 27 psi | 29 psi | 32 psi | 35 psi | 41 psi | 46 psi | 55 psi | |
| | | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.8 bar | |
| 250/85R24 | 9.5R24 | 109A8/B | 5/10 LT | 2050/930 | 2315/1025 | 2460/1115 | 2670/1210 | 2880/1305 | 3075/1395 | | | | | | | 3405/1545 | | |
| | | | 25/40 & 30/50 | | | 1665/755 | 1820/825 | 1975/895 | 2115/960 | 2270/1030 | | | | | | | | |
| 280/85R20 | 11.2R20 | | 5/10 LT | | | | | | | | | | | | | | | |
| | | | 25/40 & 30/50 | | | | | | | | | | | | | | | |
| 280/85R24 | 11.2R24 | 115A8/B | 5/10 LT | 2425/1100 | 2655/1205 | 2900/1315 | 3140/1425 | 3385/1535 | 3625/1645 | | | | | | | 4025/1825 | | |
| | | | 25/40 & 30/50 | | | 1960/890 | 2140/970 | 2325/1055 | 2500/1135 | 2680/1215 | | | | | | | | |
| 320/85R24 | 12.4R24 | 122A8/B | 5/10 LT | 2985/1355 | 3285/1490 | 3585/1625 | 3880/1760 | 4180/1895 | 4485/2035 | | | | | | | 4960/2250 | | |
| | | | 25/40 & 30/50 | | | 2425/1100 | 2645/1200 | 2865/1300 | 3085/1400 | 3305/1500 | | | | | | | | |
| 340/85R24 | 13.6R24 | 125A8/B | 5/10 LT | 3285/1490 | 3615/1640 | 3945/1790 | 4275/1940 | 4595/2085 | 4925/2235 | | | | | | | 5455/2475 | | |
| | | | 25/40 & 30/50 | | | 2670/1210 | 2910/1320 | 3155/1430 | 3395/1540 | 3640/1650 | | | | | | | | |
| 380/85R24 | 14.9R24 | 131A8/B | 5/10 LT | 3880/1760 | 4275/1940 | 4665/2115 | 5050/2290 | 5435/2465 | 5820/2640 | | | | | | | 6450/2925 | | |
| | | | 25/40 & 30/50 | | | 3155/1430 | 3440/1560 | 3725/1690 | 4010/1820 | 4300/1950 | | | | | | | | |
| 420/85R24 | 16.9R24 | 137A8/B | 5/10 LT | 4585/2080 | 5040/2285 | 5500/2495 | 5950/2700 | 6415/2910 | 6865/3115 | | | | | | | 7605/3450 | | |
| | | | 25/40 & 30/50 | | | 3715/1685 | 4055/1840 | 4400/1995 | 4730/2145 | 5070/2300 | | | | | | | | |
| 280/85R28 | 11.2R28 | 118A8/B | 5/10 LT | 2625/1190 | 2890/1310 | 3155/1430 | 3415/1550 | 3680/1670 | 3945/1790 | | | | | | | 4365/1980 | | |
| | | | 25/40 & 30/50 | | | 2140/970 | 2325/1055 | 2525/1145 | 2710/1230 | 2910/1320 | | | | | | | | |
| 320/85R28 | 12.4R28 | 124A8/B | 5/10 LT | 3185/1445 | 3505/1590 | 3825/1735 | 4145/1880 | 4465/2025 | 4785/2170 | | | | | | | 5290/2400 | | |
| | | | 25/40 & 30/50 | | | 2590/1175 | 2820/1280 | 3055/1385 | 3295/1495 | 3525/1600 | | | | | | | | |
| 340/85R28 | 13.6R28 | 127A8/B | 5/10 LT | 3485/1580 | 3835/1740 | 4180/1895 | 4530/2055 | 4885/2215 | 5225/2370 | | | | | | | 5785/2625 | | |
| | | | 25/40 & 30/50 | | | 2835/1285 | 3085/1400 | 3340/1515 | 3605/1635 | 3860/1750 | | | | | | | | |
| 380/85R28 | 14.9R28 | 133A8/B | 5/10 LT | 4100/1860 | 4510/2045 | 4925/2235 | 5335/2420 | 5745/2605 | 6150/2790 | | | | | | | 6810/3090 | | |
| | | | 25/40 & 30/50 | | | 3330/1510 | 3640/1650 | 3935/1785 | 4245/1925 | 4540/2060 | | | | | | | | |
| 420/85R28 | 16.9R28 | 139A8/B | 5/10 LT | 4840/2195 | 5325/2415 | 5810/2635 | 6295/2855 | 6780/3075 | 7265/3295 | | | | | | | 8035/3645 | | |
| | | | 25/40 & 30/50 | | | 3925/1780 | 4290/1945 | 4640/2105 | 5005/2270 | 5355/2430 | | | | | | | | |

LT = Low Torque HT = High Torque



AGRIXTRA 85 LOAD AND INFLATION

Continued

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | | | |
|-------------|---------------|----------|-------------------------|---|---------------|---------------|---------------|---------------|---------------|---------------|---------|--------|----------------|---------------|---------------|---------------|---------|
| | | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 27 psi | 29 psi | 32 psi | 35 psi | 41 psi | 46 psi | 55 psi |
| | | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.8 bar |
| 380/85R30 | 14.9R30 | 135A8/B | 5/10 LT | 4345/ 1970 | 4775/ 2165 | 5215/ 2365 | 5645/ 2560 | 6075/ 2755 | 6515/ 2955 | | | | 7210/ 3270 | | | | |
| | | | 25/40 & 30/50 | | 3525/ 1600 | 3845/ 1745 | 4165/ 1890 | 4485/ 2035 | 4805/ 2180 | | | | | | | | |
| 420/85R30 | 16.9R30 | 140A8/B | 5/10 LT | 4980/ 2260 | 5480/ 2485 | 5975/ 2710 | 6470/ 2935 | 6965/ 3160 | 7475/ 3390 | | | | 8265/ 3750 | | | | |
| | | | 25/40 & 30/50 | | 4045/ 1835 | 4410/ 2000 | 4775/ 2165 | 5150/ 2335 | 5510/ 2500 | | | | | | | | |
| 460/85R30 | 18.4R30 | 145A8/B | 5/10 LT | 5775/ 2620 | 6350/ 2880 | 6935/ 3145 | 7505/ 3405 | 8090/ 3670 | 8665/ 3930 | | | | 9590/ 4350 | | | | |
| | | | 25/40 & 30/50 | | 4685/ 2125 | 5115/ 2320 | 5545/ 2515 | 5965/ 2705 | 6395/ 2900 | | | | | | | | |
| 320/85R32 | 12.4R32 | 126A8/B | 5/10 LT | 3385/ 1535 | 3725/ 1690 | 4070/ 1845 | 4400/ 1995 | 4740/ 2150 | 5085/ 2305 | | | | 5625/ 2550 | | | | |
| | | | 25/40 & 30/50 | | 2745/ 1245 | 3000/ 1360 | 3250/ 1475 | 3495/ 1585 | 3750/ 1700 | | | | | | | | |
| 380/85R34 | 14.9R34 | 146A8/B | 5/10 LT | 4585/ 2080 | 5040/ 2285 | 5500/ 2495 | 5955/ 2700 | 6415/ 2910 | 6870/ 3115 | 7400/ 3355 | | | 7915/ 3590 | 8445/ 3830 | 8965/ 4065 | 9925/ 4500 | |
| | | | 25/40 & 30/50 | | 3715/ 1685 | 4055/ 1840 | 4400/ 1995 | 4730/ 2145 | 5070/ 2300 | 5455/ 2475 | | | 5845/ 2650 | 6230/ 2825 | 6615/ 3000 | | |
| 420/85R34 | 16.9R34 | 142A8/B | 5/10 LT | 5280/ 2395 | 5810/ 2635 | 6340/ 2875 | 6855/ 3110 | 7385/ 3350 | 7915/ 3590 | | | | 8765/ 3975 | | | | |
| | | | 25/40 & 30/50 | | 4290/ 1945 | 4675/ 2120 | 5060/ 2295 | 5455/ 2475 | 5840/ 2650 | | | | | | | | |
| 460/85R34 | 18.4R34 | 147A8/B | 5/10 LT | 6130/ 2780 | 6735/ 3055 | 7350/ 3335 | 7960/ 3610 | 8575/ 3890 | 9180/ 4165 | | | | 10175/ 4615 | | | | |
| | | | 25/40 & 30/50 | | 4970/ 2255 | 5425/ 2460 | 5875/ 2665 | 6325/ 2870 | 6780/ 3075 | | | | | | | | |
| 320/85R36 | 12.4R36 | 128A8/B | 5/10 LT | 3585/ 1625 | 3945/ 1790 | 4300/ 1950 | 4665/ 2115 | 5015/ 2275 | 5380/ 2440 | | | | 5950/ 2700 | | | | |
| | | | 25/40 & 30/50 | | 2910/ 1320 | 3175/ 1440 | 3440/ 1560 | 3705/ 1680 | 3970/ 1800 | | | | | | | | |
| 340/85R36 | 13.6R36 | 132A8/B | 5/10 LT | 3980/ 1805 | 4375/ 1985 | 4785/ 2170 | 5180/ 2350 | 5580/ 2530 | 5975/ 2710 | | | | 6615/ 3000 | | | | |
| | | | 25/40 & 30/50 | | 3230/ 1465 | 3525/ 1600 | 3825/ 1735 | 4110/ 1865 | 4410/ 2000 | | | | | | | | |
| 340/85R38 | 13.6R38 | 133A8/B | 5/10 LT | 4100/ 1860 | 4510/ 2045 | 4925/ 2235 | 5335/ 2420 | 5745/ 2605 | 6150/ 2790 | | | | 6810/ 3090 | | | | |
| | | | 25/40 & 30/50 | | 3330/ 1510 | 3640/ 1650 | 3935/ 1785 | 4245/ 1925 | 4540/ 2060 | | | | | | | | |
| 380/80R38 | 14.9R38 | 1142A8/B | 5/10 LT | 4585/ 2080 | 5040/ 2285 | 5500/ 2495 | 5955/ 2700 | 6415/ 2910 | 6870/ 3115 | 7135/ 3235 | | | 7400/ 3355 | 7650/ 3470 | 7915/ 3590 | 8765/ 3975 | |
| | | | 25/40 & 30/50 | | 3715/ 1685 | 4055/ 1840 | 4400/ 1995 | 4730/ 2145 | 5070/ 2300 | 5270/ 2390 | | | 5455/ 2475 | 5655/ 2565 | 5845/ 2650 | | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRA 85

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

AGRIXTRA 85 LOAD AND INFLATION

Continued

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | | | |
|-------------|---------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|---------|
| | | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 27 psi | 29 psi | 32 psi | 35 psi | 41 psi | 46 psi | 55 psi |
| | | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.8 bar |
| 420/85R38 | 16.9R38 | 144A8/B | 5/10 LT | 5580/2530 | 6130/2780 | 6690/3035 | 7255/3290 | 7805/3540 | 8365/3795 | | 9260/4200 | | | | | | |
| | | | 25/40 & 30/50 | | 4530/2055 | 4940/2240 | 5345/2425 | 5765/2615 | 6175/2800 | | | | | | | | |
| 460/85R38 | 18.4R38 | 149A8/B | 5/10 LT | 6470/2935 | 7120/3230 | 7770/3525 | 8410/3815 | 9060/4110 | 9710/4405 | | 10750/4875 | | | | | | |
| | | | 25/40 & 30/50 | | 5260/2385 | 5730/2600 | 6205/2815 | 6690/3035 | 7165/3250 | | | | | | | | |
| 520/85R38 | 20.8R38 | 155A8/B | 5/10 LT | 7715/3500 | 8490/3850 | 9260/4200 | 10030/4550 | 10805/4900 | 11575/5250 | | 12820/5815 | | | | | | |
| | | | 25/40 & 30/50 | | 6260/2840 | 6835/3100 | 7410/3360 | 7970/3615 | 8545/3875 | | | | | | | | |
| 460/85R42 | 18.4R42 | 156A8/B | 5/10 LT | 6670/3025 | 7340/3330 | 8005/3630 | 8675/3935 | 9335/4235 | 10010/4540 | 10495/4760 | | 10980/4980 | 11465/5200 | 11950/5420 | 13230/6000 | | |
| | | | 25/40 & 30/50 | | 5410/2455 | 5910/2680 | 6405/2905 | 6890/3125 | 7385/3350 | 7750/3515 | | | 8100/3675 | 8465/3840 | 8820/4000 | | |
| 480/80R42 | 18.4R42 | 151A8/B | 5/10 LT | 6870/3115 | 7565/3430 | 8245/3740 | 8930/4050 | 9625/4365 | 10310/4675 | | 11410/5175 | | | | | | |
| | | | 25/40 & 30/50 | | 5580/2530 | 6085/2760 | 6595/2990 | 7100/3220 | 7605/3450 | | | | | | | | |
| 520/85R42 | 20.8R42 | 167D | 5/10 LT | | 9295/4215 | 10275/4660 | 11255/5105 | 12240/5550 | 12700/5760 | | 13165/5970 | 13625/6180 | 14090/6390 | 15125/6860 | 16165/7330 | 18025/8175 | |
| | | | 25/40 & 30/50 | | 6915/3135 | 7640/3465 | 8370/3795 | 9095/4125 | 9435/4280 | | | 9790/4440 | 10130/4595 | 10475/4750 | 11245/5100 | 12015/5450 | |
| 480/80R46 | 18.4R46 | 158A8/B | 5/10 LT | 6080/2760 | 6910/3135 | 7680/3485 | 8410/3815 | 9290/4215 | 10170/4615 | | 12220/5545 | | | 13120/5950 | 15125/6860 | | |
| | | | 25/40 & 30/50 | | 5310/2410 | 5920/2685 | 6470/2935 | 7155/3245 | 7825/3550 | | | 8730/3960 | | | 9370/4250 | 11245/5100 | |

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | |
|-------------|---------------|---------|-------------------------|---|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| | | | | 18 psi | 23 psi | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi | 65 psi | 73 psi |
| | | | | 1.2 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar | 4.5 bar | 5 bar |
| 480/80R50 | 18.4R50 | 176A8/B | 5/10 LT | 9715/4405 | 11200/5080 | 12140/5505 | 13075/5930 | 14245/6460 | 15390/6980 | 16360/7420 | 17330/7860 | 19285/8745 | 21225/9625 |
| | | | 25/40 & 30/50 | 7165/3250 | 8270/3750 | 8965/4065 | 9645/4375 | 10505/4765 | 11355/5150 | 12070/5475 | 12790/5800 | 14220/6450 | 15655/7100 |

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | |
|-------------|---------------|---------|-------------------------|---|-----------|-----------|------------|------------|------------|------------|---------|------------|------------|------------|------------|
| | | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 27 psi | 29 psi | 32 psi | 35 psi | 41 psi |
| | | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar |
| 480/95R50 | | 164D | 5/10 LT | 7785/3530 | 8820/4000 | 9855/4470 | 10905/4945 | 11940/5415 | 12975/5885 | 13440/6095 | | 13905/6305 | 14365/6515 | 14830/6725 | 16540/7500 |
| | | | 40/65 | | | 7330/3325 | 8105/3675 | 8875/4025 | 9645/4375 | 9990/4530 | | | 10340/4690 | 10685/4845 | 11025/5000 |

LT = Low Torque HT = High Torque

AGRIXTRA 85

LOAD AND INFLATION

VF/SERIES

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | | | |
|-------------|---------|-------------------------|---|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi | 64psi | 67psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar | 4.4 bar | 4.6 bar |
| VF380/80R38 | 167D | ≤ 15 | 5985/2715 | 6990/3170 | 7970/3615 | 8905/4040 | 10010/4540 | 10945/4965 | 12060/5470 | 12800/5805 | 14100/6395 | 15210/6900 | 16140/7320 | 17065/7740 | 18540/8410 | |
| | | 20/30 | 5025/2280 | 5865/2660 | 6690/3035 | 7465/3385 | 8400/3810 | 9170/4160 | 10110/4585 | 10735/4870 | 11815/5360 | 12755/5785 | 13535/6140 | 14310/6490 | 15555/7055 | |
| | | 40/65 | 3870/1755 | 4510/2045 | 5150/2335 | 5745/2605 | 6460/2930 | 7055/3200 | 7780/3530 | 8255/3745 | 9095/4125 | 9810/4450 | 10405/4720 | 11010/4995 | 12015/5450 | |
| VF580/85R42 | 183D | ≤ 15 | 12700/5760 | 14770/6700 | 16830/7635 | 18905/8575 | 20965/9510 | 23040/10450 | 25395/11520 | 26875/12190 | 29530/13395 | | | | | |
| | | 20/30 | 10650/4830 | 12390/5620 | 14120/6405 | 15850/7190 | 17595/7980 | 19325/8765 | 21310/9665 | 22540/10225 | 24770/11235 | | | | | |
| | | 40/65 | 8190/3715 | 9525/4320 | 10860/4925 | 12190/5530 | 13525/6135 | 14860/6740 | 16390/7435 | 17340/7865 | 19290/8750 | | | | | |
| VF480/80R46 | 177D | ≤ 15 | 9350/4240 | 10860/4925 | 12380/5615 | 14145/6415 | 15665/7105 | 17175/7790 | 18950/8595 | 19950/9050 | 21980/9970 | 23745/10770 | 25265/11460 | | | |
| | | 20/30 | 7835/3555 | 9105/4130 | 10385/4710 | 11860/5380 | 13140/5960 | 14405/6535 | 15895/7210 | 16735/7590 | 18430/8360 | 19920/9035 | 21185/9610 | | | |
| | | 40/65 | 6030/2735 | 7010/3180 | 7980/3620 | 9125/4140 | 10110/4585 | 11080/5025 | 12225/5545 | 12875/5840 | 14175/6430 | 15320/6950 | 16095/7300 | | | |
| VF480/80R50 | 185D | ≤ 15 | 9780/4435 | 11375/5160 | 13005/5900 | 14640/6640 | 16280/7385 | 17915/8125 | 19645/8910 | 20935/9495 | 22905/10390 | 24725/11215 | 26365/11960 | 26710/12115 | 30225/13710 | 31425/14255 |
| | | 20/30 | 8200/3720 | 9535/4325 | 10915/4950 | 12280/5570 | 13645/6190 | 15025/6815 | 16470/7470 | 17550/7960 | 19215/8715 | 20745/9410 | 22110/10030 | 22400/10160 | 25355/11500 | 26355/11955 |
| | | 40/65 | 6305/2860 | 7340/3330 | 8390/3805 | 9445/4285 | 10505/4765 | 11550/5240 | 12665/5745 | 13505/6125 | 14780/6705 | 15950/7235 | 17010/7715 | 17230/7815 | 19500/8845 | 20395/9250 |
| VF480/95R50 | 170D | 5/10 LT | 8005/3630 | 9315/4225 | 10625/4820 | 11925/5410 | 13240/6005 | 14550/6600 | | | | | | | | |
| | | 5/10 HT | 7420/3365 | 8630/3915 | 9855/4470 | 11065/5020 | 12280/5570 | 13490/6120 | | | | | | | | |
| | | 15/25 | 7495/3400 | 8720/3955 | 9945/4510 | 11175/5070 | 12400/5625 | 13625/6180 | | | | | | | | |
| | | 20/30 | 7420/3365 | 8630/3915 | 9855/4470 | 11065/5020 | 12280/5570 | 13490/6120 | | | | | | | | |
| | | 25/40 | 0/ | 8465/3840 | 9655/4380 | 10845/4920 | 12035/5460 | 13230/6000 | | | | | | | | |
| | | 30/50 | 0/ | 8465/3840 | 9655/4380 | 10845/4920 | 12035/5460 | 13230/6000 | | | | | | | | |
| | | 40/65 | 0/ | 0/ | 9655/4380 | 10845/4920 | 12035/5460 | 13230/6000 | | | | | | | | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRA 70

MS951R - R1W RADIAL DRIVE TIRE

Wide profile 70-series tire for extra flotation and traction. Premium 45° lug profile provides excellent traction and minimizes vibration while roading. Low pressure and wide footprint lowers soil compaction.

- ▶ Radial tire construction
- ▶ Self-cleaning tread design
- ▶ Wide tread for maximized performance in the field
- ▶ Low pressure for minimal soil disturbance
- ▶ Premium rubber compounds reduce ozone cracking and weathering

TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. vol. gal l | # of lugs | Gross Flat Plate sq in sq cm |
|-------------|-----------|---------|------|------------|---------------------------------------|------|-----|------|------|--------|-----|-------|------|------------------|----------------------------|---------------------|------------------------------|-----------|---------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| 951518 | 260/70R16 | 109D | TL | W8 | W7 | 9.9 | 252 | 30.8 | 781 | 13.6 | 345 | 90.6 | 2300 | 29 350 | 39 31 | 46 21 | 10.6 40 | 17 x 2 | 92 591 |
| 951519 | 280/70R16 | 112D | TL | W9 | W7, W8 | 10.7 | 272 | 31.6 | 802 | 14.1 | 357 | 93.7 | 2380 | 30 375 | 40 32 | 55 25 | 12.7 48 | 17 x 2 | 93 600 |
| 951523 | 280/70R18 | 114D | TL | W9 | W8, W10 | 10.9 | 278 | 33.6 | 854 | 15.1 | 383 | 100.5 | 2553 | 32 400 | 40 32 | 60 27 | 12.2 46 | 17 x 2 | 100 643 |
| 951520 | 260/70R20 | 113D | TL | W8 | W7 | 9.8 | 248 | 34.7 | 881 | 15.5 | 394 | 103.4 | 2627 | 32 425 | 39 31 | 55 25 | 11.6 44 | 17 x 2 | 98 632 |
| 951521 | 280/70R20 | 116D | TL | W9 | W7, W8 | 10.7 | 271 | 35.9 | 911 | 16 | 407 | 106.8 | 2713 | 32 425 | 40 32 | 63 29 | 14.3 54 | 17 x 2 | 108 695 |
| 951550 | 300/70R20 | 110A8/B | TL | W9 | W10 | 11.5 | 292 | 37.7 | 958 | 16.7 | 424 | 112.8 | 2864 | 33 450 | 42 33 | 71 32 | 16.9 64 | 19 x 2 | 124 797 |
| 951522 | 300/70R20 | 120D | TL | W9 | W8, W10 | 11.5 | 292 | 37.7 | 958 | 16.7 | 424 | 111.3 | 2827 | 33 450 | 42 33 | 69 31 | 17.2 65 | 17 x 2 | 124 797 |
| 951100 | 360/70R24 | 122A8/B | TL | W11 | W10, W12 | 13.9 | 352 | 45.4 | 1152 | 20.3 | 516 | 135.6 | 3444 | 37 550 | 50 40 | 139 63 | 31.2 118 | 17 x 2 | 158 1021 |
| 951101 | 380/70R24 | 125A8/B | TL | W12 | W11, W13 | 14.8 | 376 | 46.9 | 1190 | 20.9 | 531 | 140.1 | 3558 | 37 575 | 52 41 | 157 71 | 37 140 | 17 x 2 | 174 1123 |
| 951103 | 420/70R24 | 130A8/B | TL | W13 | W12, W14L | 16.7 | 424 | 49.1 | 1248 | 21.8 | 554 | 147 | 3732 | 38 600 | 53 42 | 181 82 | 47.3 179 | 18 x 2 | 201 1294 |
| V951129 | 480/70R24 | 138D | TL | W15L | W14L, DW14L, DW15L, W16L, DW16L | 18.9 | 479 | 51.8 | 1316 | 22.8 | 580 | 154.9 | 3935 | 39 625 | 55 44 | 227 103 | 63.1 239 | 18 x 2 | 249 1607 |
| 951209 | 360/70R28 | 125A8 | TL | W11 | W10, W12 | 14.3 | 364 | 49.3 | 1251 | 22.3 | 566 | 147.3 | 3740 | 32 600 | 50 40 | 148 67 | 34.8 132 | 18 x 2 | 174 1123 |
| 951102 | 380/70R28 | 127A8/B | TL | W12 | W11, W13 | 15 | 380 | 50.9 | 1293 | 23 | 583 | 152.2 | 3866 | 39 575 | 52 41 | 170 77 | 41.7 158 | 18 x 2 | 185 1191 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued



| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. vol. gal l | # of lugs | Gross Flat Plate sq in sq cm |
|-------------|-----------|---------|------|------------|---------------------------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| 951105 | 420/70R28 | 133A8/B | TL | W13 | W12, W14L | 16.6 | 422 | 53.1 | 1349 | 23.8 | 604 | 158.8 | 4034 | 40 650 | 53 42 | 198 90 | 52.8 200 | 18 x 2 | 217 1403 |
| 951104 | 480/70R28 | 140A8/B | TL | W15L | W14L, DW14L, DW15L, W16L, DW16L | 19.1 | 484 | 56 | 1421 | 24.9 | 632 | 167.3 | 4249 | 41 675 | 55 44 | 249 113 | 71 269 | 19 x 2 | 264 1702 |
| V951130 | 480/70R30 | 152D | TL | W15L | W14L, DW14L, DW15L, W16L, DW16L | 19 | 483 | 58.2 | 1478 | 26 | 660 | 174 | 4419 | 42 700 | 60 48 | 309 140 | 74.4 282 | 19 x 2 | 241 1554 |
| 951112 | 520/70R30 | 145A8 | TL | W16L | W15L, W18L | 20.3 | 515 | 60.5 | 1536 | 26.9 | 683 | 180.9 | 4593 | 42 725 | 63 50 | 304 138 | 90 341 | 20 x 2 | 306 1974 |
| V951131 | 480/70R34 | 155A8/B | TL | W15L | W14L, DW14L, DW15L, W16L, DW16L | 18.9 | 479 | 62.2 | 1580 | 28 | 711 | 186 | 4724 | 43 750 | 60 48 | 333 151 | 82.1 311 | 19 x 2 | 263 1696 |
| 951121 | 520/70R34 | 148A8 | TL | W16L | W15L, W18L | 20.1 | 511 | 64.6 | 1640 | 28.9 | 735 | 193.1 | 4904 | 44 775 | 63 50 | 332 150 | 99.3 376 | 20 x 2 | 332 2145 |
| 951214 | 480/70R38 | 145A8/B | TL | W15L | W14L, W16L | 19.4 | 493 | 66.2 | 1681 | 30 | 762 | 197.9 | 5026 | 44 800 | 87 45 | 319 145 | 89.5 339 | 20 x 2 | 306 1974 |
| 951108 | 520/70R38 | 150A8/B | TL | W16L | W15L, DW15L, DW16L, W18L, DW18L | 20.3 | 516 | 68.9 | 1749 | 31 | 788 | 205.9 | 5230 | 45 825 | 63 50 | 366 166 | 109.6 415 | 20 x 2 | 354 2281 |
| 951109 | 580/70R38 | 155A8/B | TL | W18L | DW18L | 22.8 | 578 | 71.9 | 1827 | 32.2 | 819 | 215.1 | 5463 | 46 875 | 71 56 | 444 202 | 138.9 526 | 21 x 2 | 409 2638 |
| 951124 | 620/70R42 | 166D | TL | DW20B | - | 24.6 | 625 | 76.2 | 1935 | 34.3 | 872 | 227.8 | 5786 | 47 925 | 73 58 | 512 232 | 163.7 620 | 22 x 2 | 419 2706 |
| V951526 | 620/70R46 | 162D | TL | DW20B | DW18L, W18L | 24.6 | 625 | 80.2 | 2036 | 36 | 914 | 228.8 | 5812 | 48 975 | 73 58 | 575 261 | 173 655 | 22 x 2 | 547 3531 |

MAXAM AGRIXTRA 70

MS951R - R1W RADIAL DRIVE TIRE

AGRIXTRA 70 LOAD AND INFLATION

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | | |
|-------------|---------|-------------------------|---|----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|---------|--|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 27 psi | 29 psi | 32 psi | 35 psi | 41 psi | |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | |
| 260/70R16 | 109D | 5/10 LT | 1145/520 | 1390/630 | 1630/740 | 1875/850 | 1960/890 | 2160/980 | 2555/1160 | 2910/1320 | 3405/1545 | | | | |
| | | 5/10 HT | 1070/485 | 1255/570 | 1435/650 | 1620/735 | 1795/815 | 1960/890 | 2315/1050 | 2610/1185 | | | | | |
| | | 15/25 | 1100/500 | 1290/585 | 1475/670 | 1675/760 | 1850/840 | 2030/920 | 2390/1085 | 2690/1220 | | | | | |
| | | 20/30 | 1070/485 | 1255/570 | 1435/650 | 1620/735 | 1795/815 | 1960/890 | 2315/1050 | 2610/1185 | | | | | |
| | | 25/40 | | 1190/540 | 1365/620 | 1545/700 | 1710/775 | 1875/850 | 2205/1000 | 2470/1120 | | | | | |
| | | 30/50 | | 1145/520 | 1310/595 | 1475/670 | 1640/745 | 1795/815 | 2115/960 | 2380/1080 | | | | | |
| | | 40/65 | | | 1245/565 | 1410/640 | 1565/710 | 1710/775 | 2015/915 | 2270/1030 | | | | | |
| 280/70R16 | 112D | 5/10 LT | 1255/570 | 1520/690 | 1785/810 | 2030/920 | 2140/970 | 2335/1060 | 2780/1260 | 3155/1430 | | 3705/1680 | | | |
| | | 5/10 HT | 1170/530 | 1365/620 | 1555/705 | 1765/800 | 1960/890 | 2125/965 | 2525/1145 | 2845/1290 | | | | | |
| | | 15/25 | 1200/545 | 1410/640 | 1610/730 | 1820/825 | 2030/920 | 2195/995 | 2600/1180 | 2920/1325 | | | | | |
| | | 20/30 | 1170/530 | 1365/620 | 1555/705 | 1765/800 | 1960/890 | 2125/965 | 2525/1145 | 2845/1290 | | | | | |
| | | 25/40 | | 1300/590 | 1490/675 | 1675/760 | 1875/850 | 2030/920 | 2405/1090 | 2680/1215 | | | | | |
| | | 30/50 | | | 1245/565 | 1420/645 | 1610/730 | 1795/815 | 1940/880 | 2305/1045 | 2590/1175 | | | | |
| | | 40/65 | | | 1355/615 | 1530/695 | 1710/775 | 1850/840 | 2195/995 | 2470/1120 | | | | | |
| 280/70R18 | 114D | 5/10 LT | 1440/655 | 1695/770 | 1940/880 | 2190/995 | 2435/1105 | 2645/1200 | 2865/1300 | | 3105/1410 | 3330/1510 | 3525/1600 | | |
| | | 40/65 | | 1300/590 | 1440/655 | 1630/740 | 1815/825 | 1970/895 | 2125/965 | | 2310/1050 | 2425/1115 | 2600/1180 | | |
| 260/70R20 | 113D | 5/10 LT | 1280/580 | 1555/705 | 1820/825 | 2095/950 | 2205/1000 | 2405/1090 | 2865/1300 | 3265/1480 | | 3805/1725 | | | |
| | | 5/10 HT | 1190/540 | 1400/635 | 1610/730 | 1810/820 | 2015/915 | 2195/995 | 2600/1180 | 2920/1325 | | | | | |
| | | 15/25 | 1225/555 | 1435/650 | 1655/750 | 1865/845 | 2070/940 | 2260/1025 | 2680/1215 | 3010/1365 | | | | | |
| | | 20/30 | 1190/540 | 1400/635 | 1610/730 | 1810/820 | 2015/915 | 2195/995 | 2600/1180 | 2920/1325 | | | | | |
| | | 25/40 | | 1325/600 | 1530/695 | 1730/785 | 1920/870 | 2085/945 | 2470/1120 | 2755/1250 | | | | | |
| | | 30/50 | | | 1280/580 | 1465/665 | 1655/750 | 1840/835 | 2005/910 | 2370/1075 | 2670/1210 | | | | |
| | | 40/65 | | | 1400/635 | 1575/715 | 1755/795 | 1905/865 | 2260/1025 | 2535/1150 | | | | | |
| 280/70R20 | 116D | 5/10 LT | 1410/640 | 1710/775 | 1985/900 | 2280/1035 | 2390/1085 | 2610/1185 | 3110/1410 | 3525/1600 | | 4135/1875 | | | |
| | | 5/10 HT | 1300/590 | 1520/690 | 1755/795 | 1960/890 | 2195/995 | 2380/1080 | 2820/1280 | 3175/1440 | | | | | |
| | | 15/25 | 1345/610 | 1565/710 | 1810/820 | 2030/920 | 2260/1025 | 2460/1115 | 2910/1320 | 3265/1480 | | | | | |
| | | 20/30 | 1300/590 | 1520/690 | 1755/795 | 1960/890 | 2195/995 | 2380/1080 | 2820/1280 | 3175/1440 | | | | | |
| | | 25/40 | 0/ | 1445/655 | 1665/755 | 1875/850 | 2085/945 | 2270/1030 | 2690/1220 | 3000/1360 | | | | | |
| | | 30/50 | 0/ | 1390/630 | 1600/725 | 1795/815 | 2005/910 | 2170/985 | 2580/1170 | 2900/1315 | | | | | |
| | | 40/65 | 0/ | 0/ | 1520/690 | 1710/775 | 1905/865 | 2070/940 | 2460/1115 | 2755/1250 | | | | | |

LT = Low Torque HT = High Torque



AGRIXTRA 70 LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | | | |
|-------------|---------|-------------------------|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--------|-----------|---------|---------|--|--|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 27 psi | 29 psi | 32 psi | 35 psi | 41 psi | | |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | | |
| 300/70R20 | 110A8/B | 5/10 LT | 1850/840 | 2060/935 | 2250/1020 | 2460/1115 | 2690/1220 | 2920/1325 | 3505/1590 | | | | | | | |
| | | 5/10 HT | 1380/625 | 1610/730 | 1830/830 | 2050/930 | 2280/1035 | 2500/1135 | | | | | | | | |
| | | 15/25 | 1435/650 | 1665/755 | 1895/860 | 2125/965 | 2360/1070 | 2590/1175 | | | | | | | | |
| | | 20/30 | 1380/625 | 1610/730 | 1830/830 | 2050/930 | 2280/1035 | 2500/1135 | | | | | | | | |
| | | 25/40 | | 1500/680 | 1710/775 | 1920/870 | 2125/965 | 2335/1060 | | | | | | | | |
| | | 30/50 | | 1500/680 | 1710/775 | 1920/870 | 2125/965 | 2335/1060 | | | | | | | | |
| | | 40/65 | | | | | | | | | | | | | | |
| 300/70R20 | 120D | 5/10 LT | 1840/835 | 2030/920 | 2215/1005 | 2445/1110 | 2690/1220 | 2920/1325 | 3470/1575 | 3955/1795 | 0/ | 4630/2100 | | | | |
| | | 5/10 HT | 1455/660 | 1700/770 | 1950/885 | 2205/1000 | 2445/1110 | 2670/1210 | 3155/1430 | 3550/1610 | 0/ | 0/ | | | | |
| | | 15/25 | 1500/680 | 1755/795 | 2005/910 | 2270/1030 | 2525/1145 | 2745/1245 | 3250/1475 | 3660/1660 | 0/ | 0/ | | | | |
| | | 20/30 | 1455/660 | 1700/770 | 1950/885 | 2205/1000 | 2445/1110 | 2670/1210 | 3155/1430 | 3550/1610 | 0/ | 0/ | | | | |
| | | 25/40 | 0/ | 1620/735 | 1865/845 | 2105/955 | 2325/1055 | 2535/1150 | 3010/1365 | 3415/1550 | 0/ | 0/ | | | | |
| | | 30/50 | 0/ | 1555/705 | 1785/810 | 2015/915 | 2240/1015 | 2435/1105 | 2875/1305 | 3240/1470 | 0/ | 0/ | | | | |
| | | 40/65 | 0/ | 0/ | 1700/770 | 1920/870 | 2125/965 | 2315/1050 | 2745/1245 | 3085/1400 | 0/ | 0/ | | | | |
| 360/70R24 | 122A8/B | 5/10 LT | 2985/1355 | 3285/1490 | 3585/1625 | 3880/1760 | 4180/1895 | 4485/2035 | 4960/2250 | | | | | | | |
| | | 25/40 & 30/50 | | 2425/1100 | 2645/1200 | 2865/1300 | 3085/1400 | 3305/1500 | | | | | | | | |
| 380/70R24 | 125A8/B | 5/10 LT | 3285/1490 | 3615/1640 | 3945/1790 | 4275/1940 | 4595/2085 | 4925/2235 | 5455/2475 | | | | | | | |
| | | 25/40 & 30/50 | | 2670/1210 | 2910/1320 | 3155/1430 | 3395/1540 | 3640/1650 | | | | | | | | |
| 420/70R24 | 130A8/B | 5/10 LT | 3780/1715 | 4165/1890 | 4540/2060 | 4915/2230 | 5300/2405 | 5675/2575 | 6285/2850 | | | | | | | |
| | | 25/40 & 30/50 | | 3075/1395 | 3350/1520 | 3625/1645 | 3915/1775 | 4190/1900 | | | | | | | | |
| 480/70R24 | 138D | 5/10 LT | 4200/1905 | 4765/2160 | 5315/2410 | 5875/2665 | 6440/2920 | 7000/3175 | 7805/3540 | | | | | | | |
| | | 40/65 | | | 3960/1795 | 4365/1980 | 4785/2170 | 5205/2360 | | | | | | | | |
| 360/70R28 | 125A8/B | 5/10 LT | 3285/1490 | 3615/1640 | 3945/1790 | 4275/1940 | 4595/2085 | 4925/2235 | 5455/2475 | | | | | | | |
| | | 25/40 & 30/50 | | 2670/1210 | 2910/1320 | 3155/1430 | 3395/1540 | 3640/1650 | | | | | | | | |
| 380/70R28 | 127A8/B | 5/10 LT | 3485/1580 | 3835/1740 | 4180/1895 | 4530/2055 | 4885/2215 | 5225/2370 | 5785/2625 | | | | | | | |
| | | 25/40 & 30/50 | | 2835/1285 | 3085/1400 | 3340/1515 | 3605/1635 | 3860/1750 | | | | | | | | |
| 420/70R28 | 133A8/B | 5/10 LT | 4100/1860 | 4510/2045 | 4925/2235 | 5335/2420 | 5745/2605 | 6150/2790 | 6810/3090 | | | | | | | |
| | | 25/40 & 30/50 | | 3330/1510 | 3640/1650 | 3935/1785 | 4245/1925 | 4540/2060 | | | | | | | | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRA 70

MS951R - R1W RADIAL DRIVE TIRE

AGRIXTRA 70 LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | | |
|-------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|------------|------------|--------|------------|------------|------------|--|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 27 psi | 29 psi | 32 psi | 35 psi | 41 psi | |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | |
| 480/70R28 | 140A8/B | 5/10 LT | 4980/2260 | 5480/2485 | 5975/2710 | 6470/2935 | 6965/3160 | 7475/3390 | 8265/3750 | | | | | | |
| | | 25/40 & 30/50 | | 4045/1835 | 4410/2000 | 4775/2165 | 5150/2335 | 5510/2500 | | | | | | | |
| 520/70R30 | 145A8/B | 5/10 LT | 5775/2620 | 6350/2880 | 6935/3145 | 7505/3405 | 8090/3670 | 8665/3930 | 9590/4350 | | | | | | |
| | | 25/40 & 30/50 | | 4685/2125 | 5115/2320 | 5545/2515 | 5965/2705 | 6395/2900 | | | | | | | |
| 520/70R34 | 148A8/B | 5/10 LT | 6270/2845 | 6900/3130 | 7530/3415 | 8155/3700 | 8785/3985 | 9415/4270 | 10415/4725 | | | | | | |
| | | 25/40 & 30/50 | | 5095/2310 | 5555/2520 | 6020/2730 | 6480/2940 | 6945/3150 | | | | | | | |
| 480/70R38 | 145A8/B | 5/10 LT | 5775/2620 | 6350/2880 | 6935/3145 | 7505/3405 | 8090/3670 | 8665/3930 | 9590/4350 | | | | | | |
| | | 25/40 & 30/50 | | 4685/2125 | 5115/2320 | 5545/2515 | 5965/2705 | 6395/2900 | | | | | | | |
| 520/70R38 | 150A8/B | 5/10 LT | 6670/3025 | 7340/3330 | 8005/3630 | 8675/3935 | 9335/4235 | 10010/4540 | 11080/5025 | | | | | | |
| | | 25/40 & 30/50 | | 5410/2455 | 5910/2680 | 6405/2905 | 6890/3125 | 7385/3350 | | | | | | | |
| 580/70R38 | 155A8/B | 5/10 LT | 7715/3500 | 8490/3850 | 9260/4200 | 10030/4550 | 10805/4900 | 11575/5250 | 12820/5815 | | | | | | |
| | | 25/40 & 30/50 | | 6260/2840 | 6835/3100 | 7410/3360 | 7970/3615 | 8545/3875 | | | | | | | |
| 620/70R42 | 166D | 5/10 LT | 8005/3630 | 9075/4115 | 10145/4600 | 11210/5085 | 12280/5570 | 13350/6055 | 13935/6320 | 14530/6590 | | 15125/6860 | 15720/7130 | 17530/7950 | |
| | | 40/65 | | | 7540/3420 | 8335/3780 | 9130/4140 | 9925/4500 | 10365/4700 | 10805/4900 | | 11245/5100 | 11685/5300 | | |
| 620/70R46 | 162D | 5/10 LT | 7640/3465 | 8875/4035 | 10220/4640 | 11500/5210 | 12575/5715 | 14125/6390 | | | | | | | |
| | | 40/65 | | 5680/2575 | 6600/3000 | 7600/3450 | 8550/3875 | 9350/4250 | 10500/4750 | | | | | | |

LT = Low Torque HT = High Torque



AGRIXTRA 70 LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | |
|-------------|---------|-------------------------|--|-----------|------------|------------|------------|------------|-----------|
| | | | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi |
| | | | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar |
| 480/70R30 | 152D | 5/10 LT | 5195/2355 | 5800/2630 | 6415/2910 | 7025/3185 | 7640/3465 | 8005/3630 | 8380/3800 |
| | | 40/65 | | 4310/1955 | 4775/2165 | 5225/2370 | 5680/2575 | 5955/2700 | 6230/2825 |
| 480/70R34 | 155A8/B | 5/10 LT | 5975/2710 | 6515/2955 | 7055/3200 | 7595/3445 | 8135/3690 | 8535/3870 | 8930/4050 |
| | | 25/40 & 30/50 | 4410/2000 | 4805/2180 | 5205/2360 | 5610/2545 | 6010/2725 | 6295/2855 | 6595/2990 |
| Metric Size | LI / SS | Service Speed (mph/kph) | <i>(continued)</i> TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | |
| | | | 32 psi | 35 psi | 38 psi | 41 psi | 44 psi | 46 psi | |
| | | | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar | 3 bar | 3.2 bar | |
| 480/70R30 | 152D | 5/10 LT | 8755/3970 | 9120/4135 | 9470/4295 | 9825/4455 | 10175/4615 | 10530/4775 | |
| | | 40/65 | 6505/2950 | 6780/3075 | 7045/3195 | 7310/3315 | 7565/3430 | 7830/3550 | |
| 480/70R34 | 155A8/B | 5/10 LT | 9315/4225 | 9715/4405 | 10175/4615 | 10640/4825 | 11115/5040 | 11575/5250 | |
| | | 25/40 & 30/50 | 6880/3120 | 7165/3250 | 7510/3405 | 7860/3565 | 8205/3720 | 8545/3875 | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRA 65

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

Extra wide profile 65-series tire for high flotation and traction. Premium 45° lug profile provides excellent traction and minimizes vibration while roading. Low pressure and wide footprint lowers soil compaction.

- ▶ Radial tire construction
- ▶ Self-cleaning tread design
- ▶ Wide tread for maximized performance in the field
- ▶ Low pressure for minimal soil disturbance
- ▶ Premium rubber compounds reduce ozone cracking and weathering



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|-----------|---------|------|------------|--------------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| 951116 | 440/65R24 | 128D | TL | W14L | W13, W15L | 17.4 | 442 | 46.5 | 1182 | 20 | 508 | 139.2 | 3534 | 37 575 | 53 42 | 172 78 | 51.5 195 | 18 x 2 | 190 1225 |
| V951555 | 440/65R24 | 135D | TL | W14L | W13, W15L | 17.5 | 446 | 46.9 | 1191 | 21.4 | 544 | 139.8 | 3560 | 37 575 | 53 42 | 172 78 | 41.7 158 | 18 x 2 | 220 1419 |
| 951201 | 480/65R24 | 133D | TL | W15L | W14L, DW14L, DW15L | 18.9 | 479 | 48.6 | 1234 | 21.6 | 548 | 145.3 | 3690 | 38 600 | 54 43 | 198 90 | 52.3 198 | 18 x 2 | 217 1403 |
| V951557 | 480/65R24 | 140D | TL | W15L | W14L, DW14L, DW15L | 18.7 | 475 | 49.2 | 1250 | 22.4 | 568 | 147.1 | 3736 | 38 600 | 54 43 | 190 86 | 52 197 | 18 x 2 | 249 1608 |
| 951217 | 540/65R24 | 140D | TL | W16L | DW16L, W18L, DW18L | 20.9 | 530 | 51.7 | 1312 | 22 | 559 | 154.5 | 3923 | 39 625 | 58 46 | 247 112 | 80 303 | 18 x 2 | 264 1702 |
| V951559 | 540/65R24 | 146D | TL | W16L | DW16L, W18L, DW18L | 21.4 | 544 | 52.4 | 1330 | 23.5 | 597 | 156.5 | 3975 | 39 625 | 58 46 | 258 117 | 69.2 262 | 18 x 2 | 299 1930 |
| 951119 | 420/65R28 | 128D | TL | W13 | W11, W12 | 16.5 | 418 | 49.5 | 1257 | 21.2 | 538 | 148 | 3758 | 39 600 | 52 41 | 170 77 | 57 216 | 18 x 2 | 190 1225 |
| 951200 | 440/65R28 | 131D | TL | W14L | W13, DW14L W15L DW15L | 17.4 | 442 | 50.5 | 1283 | 22.8 | 579 | 151.1 | 3836 | 39 625 | 53 42 | 190 86 | 47.3 179 | 18 x 2 | 206 1328 |
| V951556 | 440/65R28 | 138D | TL | W14L | W13, DW14L W15L DW15L | 17.4 | 443 | 50.8 | 1290 | 23.6 | 600 | 151.8 | 3856 | 39 625 | 53 42 | 214 97 | 47 178 | 18 x 2 | 221 1419 |
| 951202 | 480/65R28 | 136D | TL | W15L | W14L, DW14L, DW15L | 18.9 | 479 | 52.6 | 1335 | 23.6 | 599 | 157.2 | 3992 | 40 650 | 54 43 | 216 98 | 58.6 222 | 18 x 2 | 236 1525 |
| V951558 | 480/65R28 | 142D | TL | W15L | W14L, DW14L, DW15L | 18.7 | 475 | 53.1 | 1348 | 24.4 | 620 | 158.6 | 4029 | 40 650 | 53 43 | 247 112 | 69.2 262 | 18 x 2 | 262 1688 |
| 951203 | 540/65R28 | 142D | TL | W16L | DW16L, W18L, DW18L | 20.9 | 530 | 55.6 | 1413 | 24.8 | 629 | 166.4 | 4225 | 41 675 | 58 46 | 271 123 | 77.1 292 | 19 x 2 | 280 1804 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued

| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|-----------|---------|------|------------|--------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951560 | 540/65R28 | 149D | TL | W16L | DW16L, W18L, DW18L | 20.7 | 525 | 55.7 | 1415 | 25.4 | 646 | 166.5 | 4229 | 41 675 | 58 46 | 273 124 | 77.1 292 | 19 x 2 | 355 2289 |
| V951132 | 540/65R30 | 150D | TL | W16L | DW16L, W18L, DW18L | 20.9 | 530 | 57.6 | 1464 | 25.8 | 655 | 172.4 | 4377 | 41 700 | 63 50 | 318 144 | 79.7 302 | 19 x 2 | 265 1711 |
| 951122 | 540/65R34 | 145D | TL | W16L | DW16L, W18L, DW18L | 20.9 | 530 | 61.7 | 1566 | 25.9 | 658 | 184.4 | 4682 | 43 705 | 64 51 | 329 149 | 121.2 459 | 20 x 2 | 306 1974 |
| V951561 | 540/65R34 | 152D | TL | W16L | DW16L, W18L, DW18L | 21.2 | 538 | 62.5 | 1588 | 28.3 | 720 | 186.9 | 4746 | 43 750 | 64 51 | 298 135 | 87.7 332 | 20 x 2 | 361 2330 |
| V951149 | 600/65R34 | 151D | TL | DW20B | W18L | 24.1 | 611 | 64.7 | 1644 | 29 | 736 | 193.6 | 4916 | 43 775 | 66 52 | 375 170 | 118.3 448 | 20 x 2 | 364.1 2349 |
| V951563 | 600/65R34 | 157D | TL | W16L | DW16L, W18L, DW18L | 24 | 610 | 64.5 | 1638 | 29.3 | 744 | 192.7 | 4896 | 43 775 | 66 52 | 388 176 | 110.2 417 | 20 x 2 | 399.6 2578 |
| 951215 | 540/65R38 | 147D | TL | W16L | DW16L, W18L, DW18L | 20.9 | 530 | 65.6 | 1667 | 27.5 | 698 | 196.3 | 4984 | 44 800 | 64 51 | 364 165 | 140.2 531 | 20 x 2 | 325 2094 |
| V951562 | 540/65R38 | 153D | TL | W16L | DW16L, W18L, DW18L | 21.3 | 542 | 66.1 | 1679 | 30.3 | 769 | 197.6 | 5018 | 44 800 | 64 51 | 348 158 | 94.3 357 | 20 x 2 | 388.3 2505 |
| 951205 | 600/65R38 | 153D | TL | DW20B | W18L, DW18L, DW20A | 24.1 | 611 | 68.7 | 1745 | 31 | 787 | 205.5 | 5218 | 45 825 | 66 52 | 401 182 | 129.4 490 | 20 x 2 | 385 2485 |
| V951564 | 600/65R38 | 159D | TL | DW20B | W18L, DW18L, DW20A | 24.3 | 616 | 69.1 | 1755 | 31.2 | 792 | 206.5 | 5245 | 45 825 | 66 52 | 425 193 | 124.2 470 | 20 x 2 | 422.7 2727 |
| V951146 | 650/65R38 | 166D | TL | DW20B | DW20A | 25.4 | 645 | 71.3 | 1810 | 32 | 812 | 213.1 | 5412 | 46 875 | 71 56 | 536 243 | 151.3 573 | 20 x 2 | 419 2706 |
| 951133 | 650/65R42 | 165D | TL | DW20B | DW20A | 25.4 | 645 | 75.3 | 1912 | 34 | 863 | 225.1 | 5717 | 47 925 | 73 58 | 531 241 | 163.4 619 | 21 x 2 | 449 2894 |

TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS **VF**/SERIES

| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. vol. gal l | # of lugs | Gross Flat Plate sq in sq cm |
|-------------|-------------|---------|------|------------|--------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951533 | VF650/65R42 | 170D | TL | DW21B | DW23B | 25.6 | 650 | 75.3 | 1913 | 33.2 | 843 | 229.1 | 5820 | 47 925 | 74 59 | 559 254 | 160.6 608 | 21 x 2 | 595 3841 |

MAXAM AGRIXTRA 65

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

AGRIXTRA 65 LOAD AND INFLATION

| Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | |
|-----------|---------|-------------------------|---|-----------|-----------|-----------|-----------|------------|------------|-----------|-----------|------------|------------|---------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 27 psi | 29 psi | 32 psi | 35 psi | 38 psi | 41 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar |
| 440/65R24 | 128D | 5/10 LT | 3210/1455 | 3625/1645 | 4055/1840 | 4485/2035 | 4905/2225 | 5335/2420 | 5955/2700 | | | | | |
| | | 40/65 | | | 3020/1370 | 3330/1510 | 3650/1655 | 3970/1800 | | | | | | |
| 440/65R24 | 135D | 5/10 LT | 3040/1380 | 3480/1580 | 4010/1820 | 4580/2080 | 5025/2280 | 5335/2420 | 5780/2620 | 5955/2700 | 6260/2840 | 6450/2920 | 6620/3000 | |
| | | 40/65 | | | 3000/1360 | 3420/1550 | 3740/1700 | 3960/1800 | 4300/1950 | 4400/2000 | 4680/2120 | 4800/2180 | | |
| 480/65R24 | 133D | 5/10 LT | 3660/1660 | 4155/1885 | 4640/2105 | 5125/2325 | 5625/2550 | 6110/2770 | 6815/3090 | | | | | |
| | | 40/65 | | | 3450/1565 | 3815/1730 | 4180/1895 | 4540/2060 | | | | | | |
| 480/65R24 | 140D | 5/10 LT | 3480/1580 | 4020/1820 | 4580/2080 | 5170/2350 | 5600/2550 | 6080/2760 | 6620/3000 | 6810/3080 | 7180/3260 | 7400/3350 | 7830/3550 | |
| | | 40/65 | | | 3420/1550 | 3860/1750 | 4180/1900 | 4540/2060 | 4940/2240 | 5080/2300 | 5360/2430 | 5520/2500 | | |
| 540/65R24 | 140D | 5/10 LT | 4455/2020 | 5040/2285 | 5635/2555 | 6230/2825 | 6825/3095 | 7420/3365 | 8270/3750 | | | | | |
| | | 40/65 | | | 4190/1900 | 4630/2100 | 5070/2300 | 5515/2500 | | | | | | |
| 540/65R24 | 146D | 5/10 LT | 4130/1880 | 4880/2210 | 5470/2480 | 6270/2840 | 6810/3080 | 7400/3350 | 8040/3650 | 8240/3750 | 8580/3890 | 8840/4020 | 9310/4220 | |
| | | 40/65 | | | 4080/1850 | 4680/2120 | 5080/2300 | 5520/2500 | 6000/2725 | 6150/2800 | 6400/2900 | 6600/3000 | | |
| 420/65R28 | 128D | 5/10 LT | 3210/1455 | 3625/1645 | 4055/1840 | 4485/2035 | 4905/2225 | 5335/2420 | 5955/2700 | | | | | |
| | | 40/65 | | | 3020/1370 | 3330/1510 | 3650/1655 | 3970/1800 | | | | | | |
| 440/65R28 | 131D | 5/10 LT | 3475/1575 | 3935/1785 | 4400/1995 | 4860/2205 | 5325/2415 | 5790/2625 | 6450/2925 | | | | | |
| | | 40/65 | | | 3265/1480 | 3615/1640 | 3960/1795 | 4300/1950 | | | | | | |
| 440/65R28 | 138D | 5/10 LT | 3220/2550 | 3790/1720 | 4290/1940 | 4880/2210 | 5310/2410 | 5760/2610 | 6080/2920 | 6430/2920 | 6620/3000 | 6970/3160 | 7380/3350 | |
| | | 40/65 | | | 3200/1450 | 3640/1650 | 3960/1800 | 4300/1950 | 4540/2180 | 4800/2180 | 4940/2240 | 5200/2360 | | |
| 480/65R28 | 136D | 5/10 LT | 3990/1810 | 4520/2050 | 5050/2290 | 5580/2530 | 6110/2770 | 6650/3015 | 7410/3360 | | | | | |
| | | 40/65 | | | 3750/1700 | 4145/1880 | 4540/2060 | 4940/2240 | | | | | | |
| 480/65R28 | 142D | 5/10 LT | 3700/1680 | 4290/1940 | 4880/2210 | 5600/2550 | 6080/2760 | 6620/3000 | 7180/3260 | 7400/3350 | 7610/3450 | 7830/3550 | 8270/3750 | |
| | | 40/65 | | | 3640/1650 | 4180/1900 | 4540/2060 | 4940/2240 | 5360/2430 | 5520/2500 | 5680/2575 | 5840/2650 | | |
| 540/65R28 | 142D | 5/10 LT | 4720/2140 | 5345/2425 | 5975/2710 | 6605/2995 | 7230/3280 | 7860/3565 | 8765/3975 | | | | | |
| | | 40/65 | | | 4445/2015 | 4905/2225 | 5380/2440 | 5845/2650 | | | | | | |
| 540/65R28 | 149D | 5/10 LT | 4420/2010 | 5170/2350 | 5900/2680 | 6620/3000 | 7400/3350 | 7830/3550 | 8580/3890 | 8840/4020 | 9110/4120 | 9580/4360 | 9900/4490 | |
| | | 40/65 | | | 4400/2000 | 4940/2240 | 5520/2500 | 5840/2650 | 6400/2900 | 6600/3000 | 6800/3075 | 7150/3250 | | |
| 540/65R30 | 150D | 20/30 LT & 5/10 HT | 4145/1880 | 4695/2130 | 5250/2380 | 5800/2630 | 6360/2885 | 6915/3135 | 7310/3315 | 7705/3495 | 8105/3675 | 8500/3855 | | |
| | | 40/65 | | | 4565/2070 | 5050/2290 | 5525/2505 | 6010/2725 | 6350/2880 | 6705/3040 | 7045/3195 | 7385/3350 | | |
| 540/65R34 | 145D | 5/10 LT | 5160/2340 | 5845/2650 | 6540/2965 | 7220/3275 | 7915/3590 | 8600/3900 | 9590/4350 | | | | | |
| | | 40/65 | | | 4860/2205 | 5370/2435 | 5885/2670 | 6395/2900 | | | | | | |
| 540/65R34 | 152D | 5/10 LT | 4880/2210 | 5600/2550 | 6430/2920 | 7400/3350 | 8040/3650 | 8580/3890 | 9300/4220 | 9580/4360 | 9920/4490 | 10520/4760 | 10790/4890 | |
| | | 40/65 | | | 4800/2180 | 5520/2500 | 6000/2725 | 6400/2900 | 6940/3150 | 7150/3250 | 7400/3350 | 7850/3550 | | |
| 600/65R34 | 151D | 5/10 LT | 6140/2785 | 6955/3155 | 7775/3525 | 8600/3900 | 9415/4270 | 10230/4640 | 11410/5175 | | | | | |
| | | 40/65 | | | 5775/2620 | 6395/2900 | 7000/3175 | 7605/3450 | | | | | | |

LT = Low Torque HT = High Torque



AGRIXTRA 65 LOAD AND INFLATION

Continued

| Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | |
|-----------|---------|-------------------------|---|-----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 27 psi | 29 psi | 32 psi | 35 psi | 38 psi | 41 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar |
| 600/65R34 | 157D | 5/10 LT | 5760/2610 | 6620/3000 | 7610/3450 | 8580/3890 | 9310/4220 | 10180/4620 | 11080/5030 | 11460/5190 | 11790/5360 | 12190/5530 | 12930/5860 | |
| | | 40/65 | | | 5680/2575 | 6400/2900 | 6950/3150 | 7600/3450 | 8270/3750 | 8550/3875 | 8800/4000 | 9100/4125 | | |
| 540/65R38 | 147D | 5/10 LT | 5470/2480 | 6195/2810 | 6935/3145 | 7660/3475 | 8390/3805 | 9120/4135 | 10175/4615 | | | | | |
| | | 40/65 | | | 5150/2335 | 5700/2585 | 6240/2830 | 6780/3075 | | | | | | |
| 540/65R38 | 153D | 5/10 LT | 5170/2350 | 5900/2680 | 6810/3080 | 7080/3450 | 8240/3750 | 5090/4120 | 9900/4490 | 10180/4620 | 10520/4760 | 10790/4890 | 11450/5190 | |
| | | 40/65 | | | 5080/2300 | 5280/2575 | 6150/2800 | 3800/3075 | 7390/3350 | 7600/3450 | 7850/3550 | 8050/3650 | | |
| 600/65R38 | 153D | 5/10 LT | 6495/2945 | 7365/3340 | 8225/3730 | 9095/4125 | 9955/4515 | 10825/4910 | 12070/5475 | | | | | |
| | | 40/65 | | | 6120/2775 | 6760/3065 | 7410/3360 | 8050/3650 | | | | | | |
| 600/65R38 | 159D | 5/10 LT | 6080/2760 | 6970/3160 | 8040/3650 | 9110/4120 | 9920/4490 | 10790/4890 | 11440/5190 | 11790/5360 | 12530/5700 | 12930/5860 | 13670/6200 | |
| | | 40/65 | | | 6000/2725 | 6800/3075 | 7400/3350 | 8050/3650 | 8540/3875 | 8800/4000 | 9350/4250 | 9650/4375 | | |
| 650/65R38 | 166D | 5/10 LT | 7345/3330 | 8325/3775 | 9295/4215 | 10275/4660 | 11255/5105 | 12240/5550 | 12790/5800 | 13350/6055 | 13905/6305 | 14455/6555 | 15150/6870 | 15830/7180 |
| | | 40/65 | | | 6915/3135 | 7640/3465 | 8370/3795 | 9095/4125 | 9515/4315 | 9925/4500 | 10340/4690 | 10750/4875 | 11255/5105 | 11685/5300 |
| 650/65R42 | 165D | 5/10 LT | 7565/3430 | 8565/3885 | 9580/4345 | 10585/4800 | 11600/5260 | 12600/5715 | 13635/6185 | 14075/6385 | 14815/6720 | 15255/6920 | 16150/7325 | 16590/7525 |
| | | 40/65 | | | 7120/3230 | 7870/3570 | 8620/3910 | 9370/4250 | 10140/4600 | 10500/4750 | 11000/5000 | 11400/5150 | 12000/5450 | 12300/5600 |

AGRIXTRA 65 LOAD AND INFLATION VF/SERIES

| Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | |
|-------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|---------|--------|---------|---------|---------|---------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 27 psi | 29 psi | 32 psi | 35 psi | 38 psi | 41 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.9 bar | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar |
| VF650/65R42 | 170D | 5/10 LT | 7780/3530 | 9170/4160 | 10415/4725 | 11660/5290 | 12775/5795 | 13890/6300 | | | | | | |
| | | 5/10 HT | 7550/3425 | 8905/4040 | 10120/4590 | 11330/5140 | 12410/5630 | 13490/6120 | | | | | | |
| | | 15/25 | 7630/3460 | 8995/4080 | 10220/4635 | 11440/5190 | 12535/5685 | 13625/6180 | | | | | | |
| | | 20/30 | 7550/3425 | 8905/4040 | 10120/4590 | 11330/5140 | 12410/5630 | 13490/6120 | | | | | | |
| | | 25/40 | 7410/3360 | 8730/3960 | 9920/4500 | 11110/5040 | 12170/5520 | 13230/6000 | | | | | | |
| | | 30/50 | 7410/3360 | 8730/3960 | 9920/4500 | 11110/5040 | 12170/5520 | 13230/6000 | | | | | | |
| | | 40/60 | 7410/3360 | 8730/3960 | 9920/4500 | 11110/5040 | 12170/5520 | 13230/6000 | | | | | | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRA XL

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

Large volume R1W tires for high horsepower tractor applications. Premium 45° lug profile provides excellent traction and minimizes vibration while roading. Low pressure and wide footprint lowers soil compaction.

- ▶ Radial tire construction
- ▶ Self-cleaning tread design
- ▶ Wide tread for maximized performance in the field
- ▶ Low pressure for minimal soil disturbance
- ▶ Premium rubber compounds reduce ozone cracking and weathering



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|-----------|---------|------|------------|--------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| 951120 | 600/65R28 | 154D | TL | DW20B | W18L, DW18L | 24.1 | 611 | 58.7 | 1491 | 24.8 | 629 | 175.5 | 4458 | 42 700 | 64 51 | 346 157 | 124.6 472 | 19 x 2 | 297 1915 |
| V951331 | 600/70R28 | 161D | TL | DW20B | | 23.8 | 605 | 61.2 | 1555 | 27.7 | 705 | 183.5 | 4660 | 42 725 | 68 54 | 392 178 | 127.2 482 | 19 x 2 | 382 2463 |
| V951134 | 600/70R30 | 158D | TL | DW20B | W18L, DW18L | 24.1 | 611 | 63.1 | 1602 | 27.9 | 709 | 188.6 | 4790 | 43 750 | 71 56 | 410 186 | 568 451 | 20 x 2 | 336 2170 |
| V951330 | 650/65R34 | 161D | TL | DW20B | DW23B | 25.6 | 650 | 67.3 | 1710 | 29.5 | 750 | 197 | 5000 | 44 775 | 73 58 | 487 221 | 144 545 | 20 x 2 | 433 2795 |
| V951123 | 710/70R38 | 171D | TL | DW23B | | 28.2 | 716 | 77.1 | 1959 | 34.3 | 870 | 230.6 | 5857 | 47 925 | 78 62 | 690 313 | 211.2 800 | 20 x 2 | 487 3140 |
| V951136 | 800/70R38 | 178D | TL | DW25B | | 31.4 | 798 | 81.2 | 2085 | 36.2 | 919 | 245.5 | 6234 | 48 975 | 78 62 | 908 412 | 283 1072 | 21 x 2 | 594 3830 |
| V951501 | 650/75R38 | 169D | TL | DW20B | | 25.4 | 645 | 76.4 | 1941 | 34.7 | 880 | 230 | 5850 | 47 925 | 76 60 | 588 267 | 184.9 700 | 20 x 2 | 486 3134 |
| V951135 | 650/85R38 | 173D | TL | DW23B | DW20B | 26.6 | 676 | 81.5 | 2071 | 36.0 | 914 | 243.8 | 6192 | 48 975 | 78 62 | 767 348 | 216 818 | 20 x 2 | 514 3319 |
| V951125 | 710/70R42 | 173D | TL | DW23B | | 28.2 | 716 | 81.2 | 2061 | 36.3 | 921 | 242.6 | 6162 | 48 975 | 78 62 | 754 342 | 227.3 861 | 21 x 2 | 514 3319 |
| V951227 | 710/75R42 | 175D | TL | DW23B | DW25B | 28.2 | 716 | 84 | 2133 | 37.4 | 949 | 251.1 | 6378 | 49 1025 | 78 62 | 785 356 | 252.6 957 | 22 x 2 | 546 3523 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS **VF/SERIES**

| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|-------------|---------|------|------------|--------------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951528 | VF600/65R28 | 159D | TL | DW21B | DW20B | 23.5 | 597 | 58.7 | 1491 | 24.6 | 624 | 176.4 | 4480 | 42 700 | 64 51 | 356 162 | 99.6 377 | 19 x 2 | 487 3142 |
| V951529 | VF600/60R30 | 158D | TL | DW20B | DW21B | 23.5 | 597 | 58.3 | 1482 | 24.7 | 628 | 176.5 | 4482 | 42 700 | 64 51 | 332 151 | 93.3 353 | 20 x 2 | 461 2975 |
| V951332 | VF600/70R30 | 165D | TL | DW21B | DW20B, DW18L, W18L | 23.6 | 600 | 63 | 1600 | 27.4 | 695 | 188.3 | 4783 | 43 750 | 72 57 | 408 185 | 123.6 468 | 20 x 2 | 387 2497 |
| V951530 | VF650/65R34 | 167D | TL | DW23B | DW21B | 25.6 | 650 | 67.3 | 1710 | 29.5 | 750 | 197 | 5000 | 44 775 | 73 58 | 487 221 | 144 545 | 20 x 2 | 433 2795 |
| V951532 | VF710/60R38 | 171D | TL | DW25B | DW24B, DW27B | 27.9 | 708 | 71.5 | 1817 | 30.6 | 776 | 209.1 | 5310 | 45 875 | 73 58 | 554 252 | 170.9 647 | 20 x 2 | 683 4408 |
| V951535 | VF710/60R42 | 173D | TL | DW25B | DW24B, DW27B | 27.9 | 708 | 75.6 | 1919 | 33 | 839 | 229.3 | 5825 | 47 925 | 74 59 | 605 275 | 183.9 696 | 21 x 2 | 676 4362 |
| V951546 | VF900/60R42 | 189D | TL | DW30B | | 35.2 | 894 | 84.5 | 2141 | 36.4 | 924 | 255.7 | 6495 | 48 1025 | 81 64 | 1033 469 | 312.7 1184 | 21 x 2 | 914 5898 |
| V951229 | VF710/70R42 | 179D | TL | DW25B | DW23B | 28.7 | 730 | 81.9 | 2080 | 35.3 | 896 | 248.8 | 6106 | 48 975 | 79 63 | 732 332 | 229 867 | 21 x 2 | 591 3813 |
| V951536 | VF710/75R42 | 181D | TL | DW23B | DW24B | 28.4 | 720 | 83.3 | 2115 | 36.1 | 917 | 248.8 | 6320 | 49 1025 | 79 63 | 783 355 | 249.6 945 | 21 x 2 | 801 5165 |
| V951534 | VF650/85R42 | 180D | TL | DW23B | DW20B, DW21B | 25.3 | 642 | 85.6 | 2173 | 37.2 | 944 | 256.6 | 6517 | 49 1025 | 78 62 | 805 366 | 235.9 893 | 21 x 2 | 787 5076 |
| V951507 | VF710/65R46 | 183D | TL | DW25B | | 28.1 | 715 | 82.5 | 2095 | 36.9 | 938 | 245 | 6223 | 48 1000 | 76 60 | 743 337 | 216.6 820 | 22 x 2 | 691 4456 |

MAXAM AGRIXTRA XL

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

AGRIXTRA XL LOAD AND INFLATION

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|-------------|---------|-------------------------|---|------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi | 32 psi | 35 psi | 41 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar |
| 600/65R28 | 154D | 5/10 LT | 5470/2480 | 6195/2810 | 6935/3145 | 7660/3475 | 8390/3805 | 9120/4135 | 9625/4365 | 10120/4590 | 10615/4815 | 11125/5045 | 12405/5625 |
| | | 40/65 | | | 5150/2335 | 5700/2585 | 6240/2830 | 6780/3075 | 7155/3245 | 7530/3415 | 7895/3580 | 8270/3750 | |
| 600/70R28 | 161D | 5/10 LT | 7060/3200 | 8030/3640 | 8950/4060 | 9810/4450 | 10430/4730 | 10950/4970 | 11500/5215 | 12040/5460 | 12390/5620 | 12730/5775 | 14270/6475 |
| | | 40/65 | | | 6390/2900 | 7000/3175 | 7450/3380 | 7830/3550 | 8210/3725 | 8600/3900 | 8840/4010 | 9090/4125 | 10200/4625 |
| 600/70R30 | 158D | 5/10 LT | 6315/2865 | 7155/3245 | 8005/3630 | 8840/4010 | 9690/4395 | 10530/4775 | 11045/5010 | 11565/5245 | 12085/5480 | 12600/5715 | 14055/6375 |
| | | 40/65 | | | 5955/2700 | 6570/2980 | 7200/3265 | 7830/3550 | 8215/3725 | 8600/3900 | 8985/4075 | 9370/4250 | |
| 650/65R34 | 161D | 5/10 LT | 7826/3551 | 9112/4121 | 10519/4757 | 11792/5360 | 12931/5863 | 13668/6198 | | | | | |
| | | 40/65 | 5840/2650 | 6800/3075 | 7850/3550 | 8800/4000 | 9650/4375 | 10200/4625 | | | | | |
| 710/70R38 | 171D | 5/10 LT | 9425/4275 | 10685/4845 | 11950/5420 | 13210/5990 | 14465/6560 | 15720/7130 | 16350/7415 | 16980/7700 | 17605/7985 | 18235/8270 | 20340/9225 |
| | | 40/65 | | | 8885/4030 | 9810/4450 | 10750/4875 | 11685/5300 | 12160/5515 | 12625/5725 | 13100/5940 | 13560/6150 | |
| 800/70R38 | 178D | 5/10 LT | 11565/5245 | 13110/5945 | 14650/6645 | 16195/7345 | 17740/8045 | 19285/8745 | 20020/9080 | 20760/9415 | 21500/9750 | 22250/10090 | 24805/11250 |
| | | 40/65 | | | 10895/4940 | 12040/5460 | 13185/5980 | 14335/6500 | 14885/6750 | 15435/7000 | 15985/7250 | 16540/7500 | |
| 650/85R38 | 173D | 5/10 LT | 9700/4400 | 10990/4985 | 12280/5570 | 13570/6155 | 14875/6745 | 16165/7330 | 16945/7685 | 17715/8035 | 18500/8390 | 19285/8745 | 21500/9750 |
| | | 40/65 | | | 9130/4140 | 10100/4580 | 11060/5015 | 12015/5450 | 12600/5715 | 13175/5975 | 13760/6240 | 14335/6500 | |
| 710/70R42 | 173D | 5/10 LT | 9965/4520 | 11290/5120 | 12625/5725 | 13945/6325 | 15280/6930 | 16605/7530 | 17275/7835 | 17940/8135 | 18610/8440 | 19285/8745 | 21500/9750 |
| | | 40/65 | | | 9380/4255 | 10375/4705 | 11355/5150 | 12350/5600 | 12845/5825 | 13340/6050 | 13835/6275 | 14335/6500 | |
| 710/75R42 | 175D | 5/10 LT | 10670/4840 | 12105/5490 | 13530/6135 | 14950/6780 | 16370/7425 | 17795/8070 | 18465/8375 | 19130/8675 | 19800/8980 | 20460/9280 | 22820/10350 |
| | | 40/65 | | | 10055/4560 | 11115/5040 | 12170/5520 | 13230/6000 | 13725/6225 | 14220/6450 | 14720/6675 | 15215/6900 | |

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | |
|-------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|------------|------------|---------|------------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 29 psi | 35 psi | 41 psi | 44 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3 bar |
| 650/75R38 | 169D | 5/10 LT | 8665/3930 | 9610/4360 | 10350/4695 | 11410/5175 | 12535/5685 | 13680/6205 | 16500/7485 | 17130/7770 | 0/ | 19180/8700 |
| | | 5/10 HT | 6910/3135 | 7935/3600 | 9115/4135 | 10295/4670 | 11475/5205 | 12655/5740 | 13680/6205 | 14705/6670 | 0/ | 0/ |
| | | 15/25 | 7120/3230 | 8180/3710 | 9390/4260 | 10605/4810 | 11815/5360 | 13040/5915 | 14100/6395 | 15155/6875 | 0/ | 0/ |
| | | 20/30 | 6910/3135 | 7935/3600 | 9115/4135 | 10295/4670 | 11475/5205 | 12655/5740 | 13680/6205 | 14705/6670 | 0/ | 0/ |
| | | 25/40 | 0/ | 7550/3425 | 8675/3935 | 9800/4445 | 10925/4955 | 12050/5465 | 13030/5910 | 13890/6300 | 0/ | 0/ |
| | | 30/50 | 0/ | 7240/3285 | 8320/3775 | 9405/4265 | 10470/4750 | 11550/5240 | 12490/5665 | 13425/6090 | 0/ | 0/ |
| 40/65 | 0/ | 0/ | 7925/3595 | 8950/4060 | 9975/4525 | 11000/4990 | 11895/5395 | 12785/5800 | 0/ | 0/ | | |

LT = Low Torque HT = High Torque



AGRIXTRA XL LOAD AND INFLATION VF/SERIES

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | |
|-------------|---------|-------------------------|---|-----------|-----------|------------|------------|------------|---------|--------|---------|---------|---------|--|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi | 32 psi | 35 psi | 41 psi | |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | |
| VF600/65R28 | 159D | 5/10 LT | 5675/2575 | 6680/3030 | 7595/3445 | 8510/3860 | 9315/4225 | 10130/4595 | | | | | | |
| | | 5/10 HT | 5510/2500 | 6495/2945 | 7375/3345 | 8265/3750 | 9050/4105 | 9845/4465 | | | | | | |
| | | 15/25 | 5565/2525 | 6560/2975 | 7450/3380 | 8345/3785 | 9140/4145 | 9930/4505 | | | | | | |
| | | 20/30 | 5510/2500 | 6495/2945 | 7375/3345 | 8265/3750 | 9050/4105 | 9845/4465 | | | | | | |
| | | 25/40 | 5400/2450 | 6370/2890 | 7230/3280 | 8100/3675 | 8875/4025 | 9645/4375 | | | | | | |
| | | 30/50 | 5400/2450 | 6370/2890 | 7230/3280 | 8100/3675 | 8875/4025 | 9645/4375 | | | | | | |
| | | 40/65 | 5400/2450 | 6370/2890 | 7230/3280 | 8100/3675 | 8875/4025 | 9645/4375 | | | | | | |
| VF600/60R30 | 158D | 5/10 LT | 5410/2455 | 6295/2855 | 7185/3260 | 8070/3660 | 8950/4060 | 9845/4465 | | | | | | |
| | | 5/10 HT | 5260/2385 | 6120/2775 | 6980/3165 | 7835/3555 | 8695/3945 | 9555/4335 | | | | | | |
| | | 15/25 | 5315/2410 | 6175/2800 | 7045/3195 | 7915/3590 | 8785/3985 | 9655/4380 | | | | | | |
| | | 20/30 | 5260/2385 | 6120/2775 | 6980/3165 | 7835/3555 | 8695/3945 | 9555/4335 | | | | | | |
| | | 25/40 | 5160/2340 | 5995/2720 | 6845/3105 | 7685/3485 | 8530/3870 | 9370/4250 | | | | | | |
| | | 30/50 | 5160/2340 | 5995/2720 | 6845/3105 | 7685/3485 | 8530/3870 | 9370/4250 | | | | | | |
| | | 40/65 | 5160/2340 | 5995/2720 | 6845/3105 | 7685/3485 | 8530/3870 | 9370/4250 | | | | | | |
| VF600/70R30 | 165D | 5/10 LT | 6880/3120 | 7990/3625 | 9115/4135 | 10250/4650 | 11365/5155 | 12490/5665 | | | | | | |
| | | 5/10 HT | 6370/2890 | 7410/3360 | 8455/3835 | 9500/4310 | 10540/4780 | 11585/5255 | | | | | | |
| | | 15/25 | 6435/2920 | 7485/3395 | 8545/3875 | 9590/4350 | 10635/4825 | 11695/5305 | | | | | | |
| | | 20/30 | 6370/2890 | 7410/3360 | 8455/3835 | 9500/4310 | 10540/4780 | 11585/5255 | | | | | | |
| | | 25/40 | 0/ | 7265/3295 | 8290/3760 | 9315/4225 | 10330/4685 | 11355/5150 | | | | | | |
| | | 30/50 | 0/ | 7265/3295 | 8290/3760 | 9315/4225 | 10330/4685 | 11355/5150 | | | | | | |
| | | 40/65 | 0/ | 0/ | 8290/3760 | 9315/4225 | 10330/4685 | 11355/5150 | | | | | | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRA XL

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

AGRIXTRA XL LOAD AND INFLATION VF/SERIES

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | |
|-------------|---------|-------------------------|---|------------|-------------|-------------|-------------|-------------|---------|-------------|---------|---------|---------|--|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi | 32 psi | 35 psi | 41 psi | |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | |
| VF650/65R34 | 167D | 5/10 LT | 7395/3355 | 8720/3955 | 9920/4500 | 11110/5040 | 12160/5515 | 13215/5995 | | | | | | |
| | | 5/10 HT | 6855/3110 | 8080/3665 | 9195/4170 | 10295/4670 | 11275/5115 | 12260/5560 | | | | | | |
| | | 15/25 | 6925/3140 | 8170/3705 | 9290/4215 | 10395/4715 | 11385/5165 | 12380/5615 | | | | | | |
| | | 20/30 | 6855/3110 | 8080/3665 | 9195/4170 | 10295/4670 | 11275/5115 | 12260/5560 | | | | | | |
| | | 25/40 | 0/ | 7925/3595 | 9015/4090 | 10095/4580 | 11055/5015 | 12015/5450 | | | | | | |
| | | 30/50 | 0/ | 7925/3595 | 9015/4090 | 10095/4580 | 11055/5015 | 12015/5450 | | | | | | |
| | | 40/65 | 0/ | 0/ | 9015/4090 | 10095/4580 | 11055/5015 | 12015/5450 | | | | | | |
| VF710/60R38 | 171D | 5/10 LT | 7825/3550 | 9115/4135 | 10395/4715 | 11675/5295 | 12950/5875 | 14240/6460 | | | | | | |
| | | 5/10 HT | 7605/3450 | 8850/4015 | 10095/4580 | 11345/5145 | 12590/5710 | 13835/6275 | | | | | | |
| | | 15/25 | 7685/3485 | 8940/4055 | 10195/4625 | 11455/5195 | 12710/5765 | 13965/6335 | | | | | | |
| | | 20/30 | 7605/3450 | 8850/4015 | 10095/4580 | 11345/5145 | 12590/5710 | 13835/6275 | | | | | | |
| | | 25/40 | 7465/3385 | 8675/3935 | 9900/4490 | 11120/5045 | 12335/5595 | 13560/6150 | | | | | | |
| | | 30/50 | 7465/3385 | 8675/3935 | 9900/4490 | 11120/5045 | 12335/5595 | 13560/6150 | | | | | | |
| | | 40/65 | 7465/3385 | 8675/3935 | 9900/4490 | 11120/5045 | 12335/5595 | 13560/6150 | | | | | | |
| VF710/60R42 | 173D | 5/10 LT | 10185/4620 | 11850/5375 | 13515/6130 | 15190/6890 | 16855/7645 | 18520/8400 | | | | | | |
| | | 5/10 HT | 9900/4490 | 11510/5220 | 13130/5955 | 14750/6690 | 16370/7425 | 17990/8160 | | | | | | |
| | | 15/25 | 9985/4530 | 11630/5275 | 13260/6015 | 14890/6755 | 16535/7500 | 18165/8240 | | | | | | |
| | | 20/30 | 9900/4490 | 11510/5220 | 13130/5955 | 14750/6690 | 16370/7425 | 17990/8160 | | | | | | |
| | | 25/40 | 9700/4400 | 11290/5120 | 12875/5840 | 14460/6560 | 16050/7280 | 17635/8000 | | | | | | |
| | | 30/50 | 9700/4400 | 11290/5120 | 12875/5840 | 14460/6560 | 16050/7280 | 17635/8000 | | | | | | |
| | | 40/65 | 9700/4400 | 11290/5120 | 12875/5840 | 14460/6560 | 16050/7280 | 17635/8000 | | | | | | |
| VF900/60R42 | 189D | 5/10 LT | 16690/7570 | 19410/8805 | 22475/10195 | 25210/11435 | 28275/12825 | 30655/13905 | | 34060/15450 | | | | |
| | | 5/10 HT | 11355/5150 | 13205/5990 | 15290/6935 | 17140/7775 | 19225/8720 | 20845/9455 | | 23160/10505 | | | | |
| | | 15/25 | 11465/5200 | 13325/6045 | 15430/7000 | 17305/7850 | 19410/8805 | 21055/9550 | | 23390/10610 | | | | |
| | | 20/30 | 11355/5150 | 13205/5990 | 15290/6935 | 17140/7775 | 19225/8720 | 20845/9455 | | 23160/10505 | | | | |
| | | 25/40 | 11120/5045 | 12940/5870 | 14990/6800 | 16800/7620 | 18850/8550 | 20435/9270 | | 22710/10300 | | | | |
| | | 30/50 | 11120/5045 | 12940/5870 | 14990/6800 | 16800/7620 | 18850/8550 | 20435/9270 | | 22710/10300 | | | | |
| | | 40/65 | 11120/5045 | 12940/5870 | 14990/6800 | 16800/7620 | 18850/8550 | 20435/9270 | | 22710/10300 | | | | |

LT = Low Torque HT = High Torque



AGRIXTRA XL **LOAD AND INFLATION** **VF/SERIES**

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | | |
|-------------|---------|-------------------------|---|------------|------------|------------|------------|------------|---------|------------|---------|---------|------------|--|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi | 32 psi | 35 psi | 41 psi | |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar | 2.2 bar | 2.4 bar | 2.8 bar | |
| VF710/70R42 | 179D | 5/10 LT | 10340/4690 | 12025/5455 | 13725/6225 | 15410/6990 | 17110/7760 | 18795/8525 | | | | | | |
| | | 5/10 HT | 9590/4350 | 11155/5060 | 12730/5775 | 14285/6480 | 15860/7195 | 17430/7905 | | | | | | |
| | | 15/25 | 9690/4395 | 11265/5110 | 12855/5830 | 14430/6545 | 16015/7265 | 17605/7985 | | | | | | |
| | | 20/30 | 9590/4350 | 11155/5060 | 12730/5775 | 14285/6480 | 15860/7195 | 17430/7905 | | | | | | |
| | | 25/40 | 0/ | 10935/4960 | 12480/5660 | 14010/6355 | 15555/7055 | 17085/7750 | | | | | | |
| | | 30/50 | 0/ | 10935/4960 | 12480/5660 | 14010/6355 | 15555/7055 | 17085/7750 | | | | | | |
| | | 40/65 | 0/ | 0/ | 12480/5660 | 14010/6355 | 15555/7055 | 17085/7750 | | | | | | |
| VF710/75R42 | 181D | 5/10 LT | 11010/4995 | 12810/5810 | 14615/6630 | 16400/7440 | 18210/8260 | 20005/9075 | | | | | | |
| | | 5/10 HT | 10205/4630 | 11870/5385 | 13545/6145 | 15210/6900 | 16885/7660 | 18550/8415 | | | | | | |
| | | 15/25 | 10305/4675 | 11995/5440 | 13680/6205 | 15365/6970 | 17055/7735 | 18740/8500 | | | | | | |
| | | 20/30 | 10205/4630 | 11870/5385 | 13545/6145 | 15210/6900 | 16885/7660 | 18550/8415 | | | | | | |
| | | 25/40 | 0/ | 11640/5280 | 13285/6025 | 14915/6765 | 16555/7510 | 18190/8250 | | | | | | |
| | | 30/50 | 0/ | 11640/5280 | 13285/6025 | 14915/6765 | 16555/7510 | 18190/8250 | | | | | | |
| | | 40/65 | 0/ | 0/ | 13285/6025 | 14915/6765 | 16555/7510 | 18190/8250 | | | | | | |
| VF650/85R42 | 180D | 5/10 LT | 10185/4620 | 11850/5375 | 13515/6130 | 15190/6890 | 16855/7645 | 18520/8400 | | | | | | |
| | | 5/10 HT | 9900/4490 | 11510/5220 | 13130/5955 | 14750/6690 | 16370/7425 | 17990/8160 | | | | | | |
| | | 15/25 | 9985/4530 | 11630/5275 | 13260/6015 | 14890/6755 | 16535/7500 | 18165/8240 | | | | | | |
| | | 20/30 | 9900/4490 | 11510/5220 | 13130/5955 | 14750/6690 | 16370/7425 | 17990/8160 | | | | | | |
| | | 25/40 | 9700/4400 | 11290/5120 | 12875/5840 | 14460/6560 | 16050/7280 | 17635/8000 | | | | | | |
| | | 30/50 | 9700/4400 | 11290/5120 | 12875/5840 | 14460/6560 | 16050/7280 | 17635/8000 | | | | | | |
| | | 40/65 | 9700/4400 | 11290/5120 | 12875/5840 | 14460/6560 | 16050/7280 | 17635/8000 | | | | | | |
| VF710/65R46 | 183D | 5/10 LT | 9975/4525 | 11675/5295 | 13370/6065 | 14860/6740 | 16345/7415 | 17615/7990 | | 19740/8955 | | | 21220/9625 | |
| | | 5/10 HT | 9250/4195 | 10825/4910 | 12400/5625 | 13780/6250 | 15155/6875 | 16335/7410 | | 18310/8305 | | | 19675/8925 | |
| | | 15/25 | 9350/4240 | 10935/4960 | 12520/5680 | 13910/6310 | 15300/6940 | 16500/7485 | | 18485/8385 | | | 19875/9015 | |
| | | 20/30 | 9250/4195 | 10825/4910 | 12400/5625 | 13780/6250 | 15155/6875 | 16335/7410 | | 18310/8305 | | | 19675/8925 | |
| | | 25/40 | 0/ | 10615/4815 | 12160/5515 | 13505/6125 | 14860/6740 | 16015/7265 | | 17945/8140 | | | 19290/8750 | |
| | | 30/50 | 0/ | 10615/4815 | 12160/5515 | 13505/6125 | 14860/6740 | 16015/7265 | | 17945/8140 | | | 19290/8750 | |
| | | 40/65 | 0/ | 0/ | 12160/5515 | 13505/6125 | 14860/6740 | 16015/7265 | | 17945/8140 | | | 19290/8750 | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRA H

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES

Large volume R1W tires designed specifically for harvesting machines. Premium 45° lug profile provides excellent traction and minimizes vibration while roading. Low pressure and wide footprint lowers soil compaction.

- ▶ Radial tire construction
- ▶ Wide tread for maximized performance in the field
- ▶ Self-cleaning tread design
- ▶ Steel belted for durability
- ▶ Low pressure for minimal soil disturbance
- ▶ Premium rubber compounds reduce ozone cracking and weathering



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | Replaces | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|------------|----------|---------|------|------------|---------------------------|------|------|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951137 | 1000/50R25 | | 172D | TL | 36.0TH | W14L | 41.7 | 1059 | 66.4 | 1685 | 28.6 | 727 | 198.4 | 5038 | 44 800 | 72 57 | 807 366 | 263.5 998 | 20 x 2 | 499 3217 |
| V951148 | 750/50R26 | | 157D | TL | DW25B | DW23B | 29.8 | 756 | 55.5 | 1410 | 24.5 | 623 | 166 | 4216 | 41 675 | 50 40 | 346 157 | 120.9 458 | 17 x 2 | 326 2106 |
| V951118 | 750/65R26 | 28LR26 | 166D | TL | DW25B | DW23B | 30.1 | 764 | 64.4 | 1636 | 28 | 711 | 192.6 | 4892 | 44 775 | 71 56 | 598 271 | 172.4 653 | 20 x 2 | 419 2706 |
| V951206 | 620/75R26 | 23.1R26 | 166A8/B | TL | DW20B | | 24.8 | 629 | 62.5 | 1588 | 27.3 | 693 | 187.2 | 4754 | 43 750 | 66 52 | 501 227 | 124.6 472 | 18 x 2 | 360 2320 |
| V951502 | 620/75R30 | 23.1R30 | 168D | TL | DW20B | | 25.2 | 641 | 66.8 | 1696 | 30.3 | 770 | 187.2 | 4754 | 44 800 | 74 59 | 478 217 | 147.6 559 | 20 x 2 | 433 2791 |
| V951503 | 1050/50R32 | | 184D | TL | 36.00VA | DW36B | 41.7 | 1059 | 73.5 | 1863 | 32.1 | 816 | 219.3 | 5570 | 46 875 | 59 47 | 959 435 | 318.1 1205 | 20 x 2 | 611 3939 |
| V951504 | 1250/50R32 | | 194A8/B | TL | DH44 | DW44B, DH44H, DH44B | 49.8 | 1264 | 81.1 | 2059 | 36 | 914 | 237 | 6020 | 48 975 | 76 60 | 1246 565 | 379.6 1438 | 20 x 2 | 1017 6561 |
| V951138 | 900/60R32 | 35.5LR32 | 181D | TL | DW27B | DW28B, DW30B | 33.5 | 850 | 74.5 | 1893 | 32.6 | 828 | 222.9 | 5660 | 47 925 | 72 57 | 871 395 | 257.9 977 | 21 x 2 | 560 3611 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued



| Item Number | Size | Replaces | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|-----------|----------|---------|------|------------|--------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951121 | 800/65R32 | 30.5LR32 | 178D | TL | DW27B | DW25B, DH27B | 30.3 | 770 | 73 | 1853 | 32 | 812 | 218.1 | 5540 | 46 875 | 73 58 | 761 345 | 219.1 830 | 21 x 2 | 509 3282 |
| V951228 | 800/70R32 | | 181D | TL | DW27B | DW25B, DH27B | 32.3 | 820 | 76.3 | 1937 | 34.8 | 884 | 225.4 | 5725 | 47 925 | 73 58 | 798 362 | 256.1 970 | 21 x 2 | 633 4085 |
| V951126 | 650/75R32 | 24.5R32 | 172D | TL | DW21B | DW20B, DW23B | 25.8 | 655 | 70.4 | 1789 | 31 | 787 | 210.6 | 5349 | 45 875 | 73 58 | 593 269 | 168.2 637 | 21 x 2 | 427 2757 |
| V951505 | 710/75R34 | | 178D | TL | DW23B | MW23B | 28.3 | 719 | 76.1 | 1933 | 33.4 | 849 | 230.3 | 5850 | 47 925 | 74 59 | 681 309 | 228 863 | 20 x 2 | 578 3729 |

TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS **VF/SERIES**

| Item Number | Size | Replaces | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|-------------|----------|---------|------|------------|--------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951506 | VF500/85R24 | | 163A8 | TL | W16L | DW16L | 20.9 | 532 | 57.6 | 1463 | 25.2 | 641 | 171.4 | 4353 | 41 700 | 49 39 | 284 129 | 113.9 431 | 20 x 2 | 403.5 2603 |
| V951553 | VF520/80R26 | | 168D | TL | DW18L | DW16L | 21 | 534 | 58.1 | 1477 | 25.7 | 654 | 176 | 4471 | 41 700 | 52 41 | | 84.8 321 | 17 X 2 | 386 2490 |

MAXAM AGRIXTRA H

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES



AGRIXTRA H LOAD AND INFLATION

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | |
|-------------|---------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|------------|------------|
| | | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi |
| | | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar |
| 1000/50R25 | | 172D | 5/10 LT | 8565/3885 | 9865/4475 | 11355/5150 | 12655/5740 | 14145/6415 | 15445/7005 | | 17120/7765 |
| | | | 5/10 HT | 7350/3335 | 8465/3840 | 9745/4420 | 10860/4925 | 12135/5505 | 13260/6015 | | 14695/6665 |
| | | | 15/25 | 7575/3435 | 8720/3955 | 10040/4555 | 11190/5075 | 12510/5675 | 13660/6195 | | 15145/6870 |
| | | | 20/30 | 6835/3100 | 7880/3575 | 9060/4110 | 10110/4585 | 11300/5125 | 12335/5595 | | 13670/6200 |
| | | | 25/40 | 6395/2900 | 7365/3340 | 8475/3845 | 9445/4285 | 10560/4790 | 11530/5230 | | 12775/5795 |
| | | | 30/50 | 5810/2635 | 6700/3040 | 7705/3495 | 8600/3900 | 9600/4355 | 10495/4760 | | 11630/5275 |
| 750/50R26 | | 157D | 5/10 LT | | | 7775/3525 | 8600/3900 | 9415/4270 | 10230/4640 | 10725/4865 | 11235/5095 |
| | | | 40/65 | | | 5775/2620 | 6395/2900 | 7000/3175 | 7605/3450 | 7980/3620 | 8355/3790 |
| | | | up to 5/10 cyclic | | | 8785/3985 | 9615/4360 | 10440/4735 | 11270/5110 | 12105/5490 | 12930/5865 |
| | | | up to 10/15 cyclic | | | 8005/3630 | 8765/3975 | 9525/4320 | 10275/4660 | 11035/5005 | 11795/5350 |
| 750/65R26 | 28LR26 | 166D | 5/10 LT | | | 9855/4470 | 10905/4945 | 11940/5415 | 12975/5885 | 13660/6195 | 14345/6505 |
| | | | 40/65 | | | 7330/3325 | 8105/3675 | 8875/4025 | 9645/4375 | 10155/4605 | 10670/4840 |
| | | | up to 5/10 cyclic | | | 11155/5060 | 12205/5535 | 13250/6010 | 14300/6485 | 15345/6960 | 16405/7440 |
| | | | up to 10/15 cyclic | | | 10165/4610 | 11125/5045 | 12085/5480 | 13045/5915 | 13990/6345 | 14950/6780 |
| 620/75R26 | 23.1R26 | 166A8/B | 5/10 LT | | | 8720/3955 | 9450/4285 | 10175/4615 | 10905/4945 | 11545/5235 | 12170/5520 |
| | | | 25/40 | | | 6440/2920 | 6980/3165 | 7510/3405 | 8050/3650 | 8520/3865 | 8985/4075 |
| | | | up to 5/10 cyclic | | | 10035/4550 | 10760/4880 | 11490/5210 | 12225/5545 | 12955/5875 | 13680/6205 |
| | | | up to 10/15 cyclic | | | 9150/4150 | 9810/4450 | 10475/4750 | 11145/5055 | 11810/5355 | 12480/5660 |
| | | | up to 5/10 cyclic | | | 10270/4660 | 10845/4920 | 11220/5090 | 12170/5520 | 13370/6065 | 13980/6340 |
| | | | up to 10/15 cyclic | | | 9370/4250 | 9890/4485 | 10230/4640 | 11090/5030 | 12190/5530 | 12740/5780 |
| 620/75R30 | 23.1R30 | 168D | 5/10 LT | 6825/3095 | 7705/3495 | 8520/3865 | 9425/4275 | 10195/4625 | 11165/5065 | | 13325/6045 |
| | | | 5/10 HT | 5545/2515 | 6525/2960 | 7530/3415 | 8380/3800 | 9370/4250 | 10220/4635 | | 11080/5025 |
| | | | 15/25 | 5710/2590 | 6725/3050 | 7760/3520 | 8630/3915 | 9655/4380 | 10525/4775 | | 11420/5180 |
| | | | 20/30 | 5545/2515 | 6525/2960 | 7530/3415 | 8380/3800 | 9370/4250 | 10220/4635 | | 11080/5025 |
| | | | 25/40 | 0/ | 6215/2820 | 7165/3250 | 7980/3620 | 8920/4045 | 9735/4415 | | 10550/4785 |
| | | | 30/50 | 0/ | 5965/2705 | 6880/3120 | 7650/3470 | 8555/3880 | 9325/4230 | | 10120/4590 |
| | | | 40/65 | 0/ | 0/ | 6550/2970 | 7285/3305 | 8145/3695 | 8885/4030 | | 9635/4370 |

LT = Low Torque HT = High Torque

AGRIXTRA H LOAD AND INFLATION

Continued

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | (continued) TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | |
|-------------|---------------|---------|-------------------------|---|------------|------------|------------|------------|------------|------------|------------|------------|--|
| | | | | 32 psi | 35 psi | 38 psi | 41 psi | 44 psi | 46 psi | 52 psi | 55 psi | 58 psi | |
| | | | | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar | 3 bar | 3.2 bar | 3.6 bar | 3.8 bar | 4 bar | |
| 1000/50R25 | | 172D | 5/10 LT | 18605/8440 | | | | | | | | | |
| | | | 5/10 HT | 15970/7245 | | | | | | | | | |
| | | | 15/25 | 16460/7465 | | | | | | | | | |
| | | | 20/30 | 14860/6740 | | | | | | | | | |
| | | | 25/40 | 13890/6300 | | | | | | | | | |
| | | | 30/50 | 12645/5735 | | | | | | | | | |
| 750/50R26 | | 157D | 5/10 LT | 11730/5320 | 12240/5550 | | 13650/6190 | | | | | | |
| | | | 40/65 | 8720/3955 | 9095/4125 | | | | | | | | |
| | | | up to 5/10 cyclic | 13440/6095 | 13945/6325 | 14455/6555 | 14960/6785 | 15470/7015 | | | | | |
| | | | up to 10/15 cyclic | 12250/5555 | 12710/5765 | 13175/5975 | 13640/6185 | 14100/6395 | | | | | |
| 750/65R26 | 28LR26 | 166D | 5/10 LT | 15025/6815 | 15720/7130 | | 17530/7950 | | | | | | |
| | | | 40/65 | 11180/5070 | 11685/5300 | | | | | | | | |
| | | | up to 5/10 cyclic | 17090/7750 | 17785/8065 | 18480/8380 | 19170/8695 | 19865/9010 | | | | | |
| | | | up to 10/15 cyclic | 15590/7070 | 16220/7355 | 16845/7640 | 17485/7930 | 18115/8215 | | | | | |
| 620/75R26 | 23.1R26 | 166A8/B | 10 LT | 12810/5810 | 13450/6100 | 14045/6370 | 14640/6640 | 15235/6910 | 15830/7180 | | 17530/7950 | | |
| | | | 25/40 | 9460/4290 | 9925/4500 | 10365/4700 | 10805/4900 | 11245/5100 | 11685/5300 | | | | |
| | | | up to 5/10 cyclic | 14320/6495 | 14960/6785 | 15590/7070 | 16230/7360 | 16870/7650 | 17465/7920 | | 19270/8740 | 19865/9010 | |
| | | | up to 10/15 cyclic | 13055/5920 | 13640/6185 | 14220/6450 | 14795/6710 | 15380/6975 | 15930/7225 | | 17565/7965 | 18115/8215 | |
| | | | up to 5/10 cyclic | 14570/6610 | 15380/6975 | 16200/7350 | 16975/7700 | 17380/7885 | 18585/8430 | | 20390/9250 | | |
| | | | up to 10/15 cyclic | 13280/6025 | 14020/6360 | 14770/6700 | 15475/7020 | 15850/7190 | 16940/7685 | | 18575/8425 | | |
| 620/75R30 | 23.1R30 | 168D | 5/10 LT | 13880/6295 | | | 0/ | 15740/7140 | 0/ | 17725/8040 | 0/ | | |
| | | | 5/10 HT | 12070/5475 | | | 13205/5990 | 0/ | 14200/6440 | 0/ | 0/ | | |
| | | | 15/25 | 12435/5640 | | | 13615/6175 | 0/ | 14630/6635 | 0/ | 0/ | | |
| | | | 20/30 | 12070/5475 | | | 13205/5990 | 0/ | 14200/6440 | 0/ | 0/ | | |
| | | | 25/40 | 11485/5210 | | | 12575/5705 | 0/ | 13560/6150 | 0/ | 0/ | | |
| | | | 30/50 | 11025/5000 | | | 12060/5470 | 0/ | 12965/5880 | 0/ | 0/ | | |
| | | | 40/65 | 10495/4760 | | | 11485/5210 | 0/ | 12345/5600 | 0/ | 0/ | | |

LT = Low Torque HT = High Torque

NOTE: Maximum load may not be carried for more than 0.93 miles/1.5km before unloading operation begins.
For cyclic hill-side operations over 11° (20%) slope, load adjustments below 20mph/30kmh do not apply.

MAXAM AGRIXTRA H

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES



AGRIXTRA H LOAD AND INFLATION

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | |
|-------------|---------------|---------|-------------------------|---|------------|------------|------------|------------|-------------|------------|-------------|
| | | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi |
| | | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar |
| 1050/50R32 | | 184D | 5/10 LT | 11365/5155 | 12380/5615 | 13395/6075 | 14575/6610 | 16115/7310 | 17415/7900 | | 21130/9585 |
| | | | 5/10 HT | 8895/4035 | 10275/4660 | 11640/5280 | 13240/6005 | 14605/6625 | 16205/7350 | | 17800/8075 |
| | | | 15/25 | 9170/4160 | 10580/4800 | 11995/5440 | 13635/6185 | 15045/6825 | 16690/7570 | | 18340/8320 |
| | | | 20/30 | 8895/4035 | 10275/4660 | 11640/5280 | 13240/6005 | 14605/6625 | 16205/7350 | | 17800/8075 |
| | | | 25/40 | | 9780/4435 | 11080/5025 | 12600/5715 | 13900/6305 | 15420/6995 | | 16945/7685 |
| | | | 30/50 | | 9380/4255 | 10625/4820 | 12080/5480 | 13340/6050 | 14795/6710 | | 16250/7370 |
| | | | 40/65 | | | 10120/4590 | 11510/5220 | 12700/5760 | 14090/6390 | | 15475/7020 |
| 1250/50R32 | | 194A8/B | 5/10 LT | 14770/6700 | 16225/7360 | 17560/7965 | 19080/8655 | 21110/9575 | 22830/10355 | | 27700/12565 |
| | | | 5/10 HT | 10845/4920 | 12520/5680 | 14175/6430 | 16140/7320 | 17815/8080 | 19755/8960 | | 21705/9845 |
| | | | 15/25 | 11255/5105 | 12995/5895 | 14705/6670 | 16735/7590 | 18475/8380 | 20490/9295 | | 22510/10210 |
| | | | 20/30 | 10845/4920 | 12520/5680 | 14175/6430 | 16140/7320 | 17815/8080 | 19755/8960 | | 21705/9845 |
| | | | 25/40 | 0/ | 11705/5310 | 13250/6010 | 15080/6840 | 16645/7550 | 18465/8375 | | 20285/9200 |
| | | | 30/50 | 0/ | 11705/5310 | 13250/6010 | 15080/6840 | 16645/7550 | 18465/8375 | | 20285/9200 |
| 900/60R32 | 35.5LR32 | 181D | 5/10 LT | | | 13075/5930 | 14455/6555 | 15820/7175 | 17200/7800 | 18170/8240 | 19130/8675 |
| | | | 40/65 | | | 9725/4410 | 10740/4870 | 11765/5335 | 12790/5800 | 13505/6125 | 14220/6450 |
| | | | up to 5/10 cyclic | | | 14795/6710 | 16185/7340 | 17575/7970 | 18965/8600 | 20350/9230 | 21740/9860 |
| | | | up to 10/15 cyclic | | | 13485/6115 | 14750/6690 | 16020/7265 | 17285/7840 | 18555/8415 | 19825/8990 |
| 800/65R32 | 30.5LR32 | 178D | 5/10 LT | | | 12280/5570 | 13570/6155 | 14875/6745 | 16165/7330 | 16790/7615 | 17420/7900 |
| | | | 40/65 | | | 9130/4140 | 10100/4580 | 11060/5015 | 12015/5450 | 12490/5665 | 12955/5875 |
| 800/70R32 | | 181D | 5/10 LT | 9500/4310 | 11210/5085 | 12920/5860 | 14375/6520 | 16085/7295 | 17550/7960 | | 19015/8625 |
| | | | 5/10 HT | 8155/3700 | 9625/4365 | 11090/5030 | 12345/5600 | 13800/6260 | 15060/6830 | | 16315/7400 |
| | | | 15/25 | 8410/3815 | 9910/4495 | 11420/5180 | 12720/5770 | 14220/6450 | 15520/7040 | | 16810/7625 |
| | | | 20/30 | 8155/3700 | 9625/4365 | 11090/5030 | 12345/5600 | 13800/6260 | 15060/6830 | | 16315/7400 |
| | | | 25/40 | 7770/3525 | 9160/4155 | 10560/4790 | 11750/5330 | 13140/5960 | 14340/6505 | | 15530/7045 |
| | | | 30/50 | 7450/3380 | 8785/3985 | 10120/4590 | 11265/5110 | 12600/5715 | 13745/6235 | | 14890/6755 |
| 650/75R32 | 24.5R32 | 172D | 5/10 LT | | | 10145/4600 | 11210/5085 | 12280/5570 | 13350/6055 | 14045/6370 | 14750/6690 |
| | | | 40/65 | | | 7540/3420 | 8335/3780 | 9130/4140 | 9925/4500 | 10450/4740 | 10970/4975 |
| | | | up to 5/10 cyclic | | | 11465/5200 | 12545/5690 | 13625/6180 | 14705/6670 | 15790/7160 | 16870/7650 |
| | | | up to 10/15 cyclic | | | 10465/4745 | 11445/5190 | 12425/5635 | 13405/6080 | 14400/6530 | 15380/6975 |

LT = Low Torque HT = High Torque

AGRIXTRA H LOAD AND INFLATION

Continued

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | (continued) TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|-------------|---------------|--------------------|-------------------------|---|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------|
| | | | | 32 psi | 35 psi | 38 psi | 41 psi | 44 psi | 46 psi | 52 psi | 55 psi | 58 psi |
| | | | | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar | 3 bar | 3.2 bar | 3.6 bar | 3.8 bar | 4 bar |
| 1050/50R32 | 184D | 5/10 LT | 22290/10110 | | | | | 25300/11475 | | | 28475/12915 | |
| | | 5/10 HT | 19400/8800 | | | 21220/9625 | | | 22820/10350 | | | |
| | | 15/25 | 19985/9065 | | | 21870/9920 | | | 23510/10665 | | | |
| | | 20/30 | 19400/8800 | | | 21220/9625 | | | 22820/10350 | | | |
| | | 25/40 | 18465/8375 | | | 20205/9165 | | | 21495/9750 | | | |
| | | 30/50 | 17715/8035 | | | 19380/8790 | | | 20835/9450 | | | |
| | | 40/65 | 16865/7650 | | | 18455/8370 | | | 19840/9000 | | | |
| 1250/50R32 | | 5/10 LT | 29210/13250 | | | 0/ | 33170/15045 | 0/ | 37335/16935 | 0/ | | |
| | | 5/10 HT | 23655/10730 | | | 25895/11745 | 0/ | 27835/12625 | 0/ | 0/ | | |
| | | 15/25 | 24550/11135 | | | 26850/12180 | 0/ | 28880/13100 | 0/ | 0/ | | |
| | | 20/30 | 23655/10730 | | | 25895/11745 | 0/ | 27835/12625 | 0/ | 0/ | | |
| | | 25/40 | 22110/10030 | | | 24195/10975 | 0/ | 26015/11800 | 0/ | 0/ | | |
| | | 30/50 | 22110/10030 | | | 24195/10975 | 0/ | 26015/11800 | 0/ | 0/ | | |
| 900/60R32 | | 5/10 LT | 20090/9110 | 21060/9550 | 21905/9935 | 22765/10325 | 23615/10710 | 24465/11095 | | 27285/12375 | | |
| | | 40/65 | 14940/6775 | 15655/7100 | 16295/7390 | 16925/7675 | 17565/7965 | 18190/8250 | | | | |
| | | up to 5/10 cyclic | 22710/10300 | 23695/10745 | 24665/11185 | 25645/11630 | 26615/12070 | 27475/12460 | | 30065/13635 | 30925/14025 | |
| | | up to 10/15 cyclic | 20715/9395 | 21600/9795 | 22490/10200 | 23375/10600 | 24265/11005 | 25050/11360 | | 27410/12430 | 28200/12790 | |
| 800/65R32 | | 5/10 LT | 18060/8190 | 18685/8475 | 19570/8875 | 20460/9280 | 21355/9685 | 22250/10090 | | 24805/11250 | | |
| | | 40/65 | 13430/6090 | 13890/6300 | 14555/6600 | 15215/6900 | 15875/7200 | 16540/7500 | | | | |
| 800/70R32 | | 5/10 LT | 20710/9395 | | | 22665/10280 | 24370/11055 | 23885/10835 | 24605/11160 | 27280/12375 | | |
| | | 5/10 HT | 17780/8065 | | | 19455/8825 | 20920/9490 | 17595/7980 | 18200/8250 | | | |
| | | 15/25 | 18320/8310 | | | 20040/9090 | 21550/9775 | 19600/8890 | | | | |
| | | 20/30 | 17780/8065 | | | 19455/8825 | 20920/9490 | 19015/8625 | | | | |
| | | 25/40 | 16930/7680 | | | 18520/8400 | 19920/9035 | 18190/8250 | | | | |
| | | 30/50 | 16235/7365 | | | 17760/8055 | 19105/8665 | 17360/7875 | | | | |
| 650/75R32 | | 5/10 LT | 15455/7010 | 16165/7330 | 16790/7615 | 17420/7900 | 18060/8190 | 18685/8475 | | 20835/9450 | | |
| | | 40/65 | 11500/5215 | 12015/5450 | 12490/5665 | 12955/5875 | 13430/6090 | 13890/6300 | | | | |
| | | up to 5/10 cyclic | 17585/7975 | 18290/8295 | 19005/8620 | 19715/8940 | 20430/9265 | 21070/9555 | | 22975/10420 | 23615/10710 | |
| | | up to 10/15 cyclic | 16030/7270 | 16680/7565 | 17330/7860 | 17980/8155 | 18630/8450 | 19205/8710 | | 20950/9500 | 21530/9765 | |

LT = Low Torque HT = High Torque

NOTE: Maximum load may not be carried for more than 0.93 miles/1.5km before unloading operation begins.
For cyclic hill-side operations over 11° (20%) slope, load adjustments below 20mph/30kmh do not apply.

MAXAM AGRIXTRA H

MS951R - R1W RADIAL DRIVE TIRE

VF/SERIES



AGRIXTRA H LOAD AND INFLATION

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | |
|-------------|---------------|---------|-------------------------|---|------------|------------|------------|------------|------------|---------|--------|
| | | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi |
| | | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar |
| 710/75R34 | 178D | 5/10 LT | 9150/4150 | 10320/4680 | 11410/5175 | 12620/5725 | 13660/6195 | 14970/6790 | 17855/8100 | | |
| | | 5/10 HT | 7420/3365 | 8750/3970 | 10075/4570 | 11220/5090 | 12555/5695 | 13690/6210 | 14835/6730 | | |
| | | 15/25 | 7640/3465 | 9015/4090 | 10385/4710 | 11565/5245 | 12930/5865 | 14110/6400 | 15280/6930 | | |
| | | 20/30 | 7420/3365 | 8750/3970 | 10075/4570 | 11220/5090 | 12555/5695 | 13690/6210 | 14835/6730 | | |
| | | 25/40 | | 8335/3780 | 9600/4355 | 10680/4845 | 11950/5420 | 13040/5915 | 14120/6405 | | |
| | | 30/50 | | 7990/3625 | 9205/4175 | 10240/4645 | 11465/5200 | 12500/5670 | 13545/6145 | | |
| | | 40/65 | | | 8765/3975 | 9755/4425 | 10915/4950 | 11905/5400 | 12895/5850 | | |

AGRIXTRA H LOAD AND INFLATION

VF/SERIES

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | |
|-------------|---------------|---------|-------------------------|---|------------|------------|------------|------------|------------|---------|--------|
| | | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi |
| | | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar |
| VF500/85R24 | 163A8 | 5/10 LT | 5555/2520 | 6395/2900 | 7340/3330 | 8280/3755 | 9225/4185 | 10175/4615 | 11000/4990 | | |
| | | 5/10 HT | 5150/2335 | 5930/2690 | 6800/3085 | 7685/3485 | 8555/3880 | 9435/4280 | 10195/4625 | | |
| | | 15/25 | 5205/2360 | 5985/2715 | 6865/3115 | 7750/3515 | 8640/3920 | 9525/4320 | 10295/4670 | | |
| | | 20/30 | 5150/2335 | 5930/2690 | 6800/3085 | 7685/3485 | 8555/3880 | 9435/4280 | 10195/4625 | | |
| | | 25/40 | 0/ | 5810/2635 | 6670/3025 | 7530/3415 | 8390/3805 | 9250/4195 | 10000/4535 | | |
| | | 30/50 | 0/ | 5810/2635 | 6670/3025 | 7530/3415 | 8390/3805 | 9250/4195 | 10000/4535 | | |
| VF500/85R24 | 168D | ≤ 15 | 8225/3730 | 9570/4340 | 10915/4950 | 12245/5555 | 13590/6165 | 14925/6770 | 16460/7465 | | |
| | | 20/30 | 6900/3130 | 8025/3640 | 9150/4150 | 10275/4660 | 11400/5170 | 12520/5680 | 13800/6260 | | |
| | | 40/65 | 5315/2410 | 6175/2800 | 7035/3190 | 7905/3585 | 8765/3975 | 9635/4370 | 10615/4815 | | |

LT = Low Torque HT = High Torque



AGRIXTRA H LOAD AND INFLATION

Continued

| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | (continued) TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|-------------|---------------|---------|-------------------------|---|---------|------------|---------|--------|-------------|---------|---------|--------|
| | | | | 32 psi | 35 psi | 38 psi | 41 psi | 44 psi | 46 psi | 52 psi | 55 psi | 58 psi |
| | | | | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar | 3 bar | 3.2 bar | 3.6 bar | 3.8 bar | 4 bar |
| 710/75R34 | | | 5/10 LT | 18575/8425 | | 21085/9565 | | | 23070/10465 | | | |
| | | | 5/10 HT | 16160/7330 | | 17680/8020 | | | 19015/8625 | | | |
| | | | 15/25 | 16655/7555 | | 18220/8265 | | | 19600/8890 | | | |
| | | | 20/30 | 16160/7330 | | 17680/8020 | | | 19015/8625 | | | |
| | | | 25/40 | 15390/6980 | | 16845/7640 | | | 18190/8250 | | | |
| | | | 30/50 | 14760/6695 | | 16150/7325 | | | 17360/7875 | | | |
| | | | 40/65 | 14055/6375 | | 15375/6975 | | | 16535/7500 | | | |

AGRIXTRA H LOAD AND INFLATION

Continued



| Metric Size | Standard Size | LI / SS | Service Speed (mph/kph) | (continued) TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|-------------|---------------|---------|-------------------------|---|---------|------------|---------|--------|-------------|---------|---------|--------|
| | | | | 32 psi | 35 psi | 38 psi | 41 psi | 44 psi | 46 psi | 52 psi | 55 psi | 58 psi |
| | | | | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar | 3 bar | 3.2 bar | 3.6 bar | 3.8 bar | 4 bar |
| VF500/85R24 | | | 5/10 LT | 11830/5365 | | | | | | | | |
| | | | 5/10 HT | 10970/4975 | | | | | | | | |
| | | | 15/25 | 11065/5020 | | 0/ | | | 28880/13100 | 0/ | 0/ | |
| | | | 20/30 | 10970/4975 | | 0/ | | | 27835/12625 | 0/ | 0/ | |
| | | | 25/40 | 10750/4875 | | 0/ | | | 26015/11800 | 0/ | 0/ | |
| | | | 30/50 | 10750/4875 | | 0/ | | | 26015/11800 | 0/ | 0/ | |
| VF500/85R24 | | | ≤ 15 | 17415/7900 | | 19135/8680 | | | | | | |
| | | | 20/30 | 14605/6625 | | 16050/7280 | | | | | | |
| | | | 40/65 | 11235/5095 | | 12345/5600 | | | | | | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRAN

MS951R - R1 & R1W RADIAL DRIVE TIRE

VF/SERIES

Narrow tires designed for high load, high traction tractors and sprayers working in row crop applications. Premium 45° lug profile provides excellent traction and minimizes vibration while roading.

- ▶ Radial tire construction
- ▶ Self-cleaning tread design
- ▶ Premium rubber compounds reduce ozone cracking and weathering
- ▶ Wide tread for maximized performance in the field
- ▶ Low pressure for minimal soil disturbance

TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|-----------|------------|------|------------|-----------------|------|-----|------|------|--------|-------|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951128 | 420/90R30 | 147A8/B | TL | DW13 | W14L | 16.5 | 418 | 59.8 | 1518 | 26.6 | 676 | 178.7 | 4539 | 42 725 | 62 49 | 265 120 | 70 265 | 2 x 20 | 243 1570 |
| V951524 | 230/95R32 | 128D | TL | W8 | W7 | 9.4 | 238 | 49.6 | 1259 | 23.5 | 596 | 149.5 | 3797 | 39 600 | 42 33 | 97 44 | 17.6 66.5 | 2 x 25 | 114 733 |
| V951509 | 270/95R32 | 136D | TL | W9 | W7, W8 | 10.8 | 275 | 52.3 | 1327 | 24.5 | 623 | 160 | 4055 | 40 625 | 44 35 | 127 57 | 29.9 113 | 2 x 24 | 144 927 |
| - | 230/95R36 | 130D/133A8 | TL | W7 | W8 | 8.8 | 224 | 53.3 | 1355 | 25.5 | 647 | 161 | 4089 | 40 650 | 42 33 | - | 19.3 73 | 2 x 26 | 117.8 759 |
| - | 270/95R36 | 139D/142A8 | TL | W9 | W8, W10 | 10.9 | 276 | 56.3 | 1431 | 26.3 | 668 | 169.8 | 4312 | 41 700 | 44 35 | - | 29.6 112 | 2 x 25 | 159.3 1028 |
| V951510 | 270/95R38 | 140D | TL | W9 | W10, DW10A | 10.8 | 275 | 58.2 | 1477 | 27.7 | 704.4 | 177 | 4505 | 42 725 | 44 35 | 150 68 | 33.8 128 | 2 x 26 | 158 1019 |
| - | 270/95R44 | 142D/145A8 | TL | W9 | W8, W10 | 11 | 279 | 64.9 | 1648 | 30.5 | 774 | 195.9 | 4975 | 44 800 | 44 35 | - | 35.9 136 | 2 x 28 | 182.6 1178 |
| V951333 | 420/80R46 | 151A8/B | TL | W12B | W13B, DW13B | 15.9 | 405 | 72.5 | 1840 | 35.5 | 902 | 230 | 5842 | 46 925 | 66 52 | 313 142 | 88.2 334 | 2 x 26 | 286 1844 |
| V951525 | 340/85R46 | 150D | TL | W12 | W11, DW11, DW12 | 13.5 | 343 | 68.7 | 1746 | 32 | 814 | 207.5 | 5270 | 45 875 | 54 43 | 224 102 | 52.6 199 | 2 x 28 | 241 1558 |
| V951508 | 320/90R46 | 148A8/B | TL | W10 | W10A, DW10A | 12.6 | 319 | 68.7 | 1744 | 32.4 | 823.8 | 207 | 5270 | 45 875 | 54 43 | 233 106 | 50.2 190 | 2 x 32 | 195 1261 |
| V951114 | 380/90R46 | 159A8/B | TL | W12 | W11, W13 | 15 | 380 | 72.9 | 1852 | 33.5 | 851 | 218 | 5537 | 46 875 | 58 46 | 357 162 | 77.1 292 | 2 x 22 | 237 1532 |
| V951511 | 230/95R48 | 136D | TL | W7 | W8 | 9.3 | 237 | 65.8 | 1672 | 31.3 | 795 | 196.8 | 4999 | 44 800 | 42 33 | 137 62 | 25.1 95 | 2 x 32 | 138 893 |
| V951512 | 270/95R48 | 144D | TL | W9 | W8, W9, W10 | 10.8 | 275 | 68.2 | 1733 | 32.5 | 824.6 | 207 | 5270 | 45 875 | 44 35 | 181 82 | 39.6 150 | 2 x 30 | 176 1135 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued



| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|-----------|---------|------|------------|--------------|------|-----|------|------|--------|-------|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951046 | 380/90R50 | 160A8/B | TL | W12 | W11, W13 | 15 | 380 | 76.9 | 1954 | 35.5 | 902 | 230 | 5842 | 47 975 | 58 46 | 386 175 | 82.6 313 | 2 x 23 | 244 1576 |
| V951513 | 300/95R52 | 151D | TL | W9 | W10, W11 | 12.0 | 304 | 74.7 | 1898 | 35.2 | 894.1 | 228.5 | 5804 | 47 975 | 47 37 | 234 106 | 59.2 224 | 2 x 29 | 224 1444 |
| V951514 | 320/90R54 | 151A8/B | TL | W10 | W10A | 12.6 | 319 | 76.7 | 1948 | 36.4 | 924.3 | 230 | 5850 | 47 975 | 54 43 | 264 120 | 56 212 | 2 x 36 | 212 1366 |
| V951515 | 380/90R54 | 152A8/B | TL | W12A | W12 | 15 | 380 | 80.9 | 2056 | 37.9 | 962 | 243 | 6125 | 48 1025 | 62 49 | 332 151 | 85 322 | 2 x 28 | 296 1910 |
| V951527 | 270/95R54 | 146D | TL | W9 | W8, W10 | 11.5 | 292 | 74.8 | 1901 | 35.6 | 903 | 226.1 | 5744 | 47 95 | 43 34 | 205 93 | 41.7 158 | 2 x 33 | 198 1280 |

TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS **VF/SERIES**

| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | # of Lugs | Gross Flat Plate sq in sq cm |
|-------------|--------------|---------|------|------------|-----------------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|-----------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| V951045 | VF380/90R46 | 173D | TL | W13 | DW12, DW13 | 15.1 | 383 | 72.9 | 1852 | 33.1 | 842 | 218 | 5537 | 46 925 | 47 37 | 342 155 | 80.8 306 | 2 x 32 | 321 2069 |
| - | VF320/90R46 | 165D | TL | W10 | DW10, W10L, W11, DW11 | 12.5 | 317 | 68.5 | 1740 | 31.8 | 808 | 206.7 | 5251 | 45 850 | 47 37 | - | 48.1 182 | 2 x 32 | 236.8 1528 |
| V951154 | VF420/95R50 | 179D | TL | W14L | W13L, DW14L | 17.1 | 434 | 81.4 | 2068 | 36.7 | 933 | 243 | 6164 | 48 1000 | 63 50 | 467 212 | 105.7 400 | 2 x 33 | 795 5130 |
| V951516 | VF380/105R50 | 179D | TL | W13 | DW12, DW13 | 15.1 | 383 | 80.7 | 2050 | 36.6 | 929 | 241.3 | 6130 | 48 1025 | 53 42 | 445 202 | 102 386 | 2 x 36 | 382 2467 |

MAXAM AGRIXTRAN

MS951R - R1 & R1W RADIAL DRIVE TIRE

VF/SERIES

AGRIXTRA N LOAD AND INFLATION

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|-------------|----------------|-------------------------|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi | 32 psi | 35 psi | 38 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar |
| 420/90R30 | 147A8/B | 10 LT | 5280/2395 | 5810/2635 | 6340/2875 | 6860/3110 | 7385/3350 | 7915/3590 | 8235/3735 | 8555/3880 | 8875/4025 | 9185/4165 | 10175/4615 |
| | | 30 LT/10 HT | | 4585/2080 | 5005/2270 | 5415/2455 | 5830/2645 | 6250/2835 | 6505/2950 | 6760/3065 | 7000/3175 | 7255/3290 | |
| | | 25/40 & 30/50 | | 4290/1945 | 4675/2120 | 5060/2295 | 5455/2475 | 5845/2650 | 6075/2755 | 6315/2865 | 6550/2970 | 6780/3075 | |
| 230/95R32 | 128D | 10/15 | 1860/840 | 2160/980 | 2440/1110 | 2810/1270 | 3040/1380 | 3400/1540 | 3590/1630 | 3700/1680 | 3900/1770 | 4020/1820 | 4130/1880 |
| | | 40/65 | 1390/630 | 1610/730 | 1820/825 | 2100/950 | 2270/1030 | 2540/1150 | 2680/1215 | 2760/1250 | 2910/1320 | 3000/1360 | 3080/1400 |
| 270/95R32 | 136D/ 139A8 | 5/10 LT | 2470/1120 | 2765/1255 | 3040/1380 | 3350/1520 | 3660/1660 | 3990/1810 | | 4750/2155 | | 4980/2260 | |
| | | 5/10 HT | 1995/905 | 2335/1060 | 2680/1215 | 3010/1365 | 3350/1520 | 3640/1650 | | 3980/1805 | | 4255/1930 | |
| | | 15/25 | 2050/930 | 2405/1090 | 2755/1250 | 3095/1405 | 3450/1565 | 3750/1700 | | 4100/1860 | | 4385/1990 | |
| | | 20/30 | 1995/905 | 2335/1060 | 2680/1215 | 3010/1365 | 3350/1520 | 3640/1650 | | 3980/1805 | | 4255/1930 | |
| | | 25/40 | 0/ | 2215/1005 | 2545/1155 | 2865/1300 | 3185/1445 | 3460/1570 | | 3790/1720 | | 4055/1840 | |
| | | 30/50 | 0/ | 2125/965 | 2445/1110 | 2745/1245 | 3055/1385 | 3320/1505 | | 3640/1650 | | 3890/1765 | |
| 230/95R36 | 130D/ 133A8 | 5/10 LT | 2205/1000 | 2580/1170 | 2955/1340 | 3330/1510 | 4695/2130 | 4025/1825 | | 4465/2025 | | 4720/2140 | |
| | | 5/10 HT | 1685/765 | 1975/895 | 2270/1030 | 2555/1160 | 3595/1630 | 3085/1400 | | 3415/1550 | | 3615/1640 | |
| | | 15/25 | 1740/790 | 2040/925 | 2335/1060 | 2635/1195 | 3705/1680 | 3175/1440 | | 3525/1600 | | 3725/1690 | |
| | | 20/30 | 1685/765 | 1975/895 | 2270/1030 | 2555/1160 | 3595/1630 | 3085/1400 | | 3415/1550 | | 3615/1640 | |
| | | 25/40 | 1610/730 | 1885/855 | 2160/980 | 2435/1105 | 5635/2555 | 2930/1330 | | 3265/1480 | | 3440/1560 | |
| | | 30/50 | 1545/700 | 1810/820 | 2070/940 | 2335/1060 | 3285/1490 | 2820/1280 | | 3120/1415 | | 3295/1495 | |
| 270/95R36 | 139D/ 142A8 | 5/10 LT | 2790/1265 | 3265/1480 | 3735/1695 | 4220/1915 | 3705/1680 | 5095/2310 | | 5655/2565 | | 5965/2705 | |
| | | 5/10 HT | 2140/970 | 2500/1135 | 2865/1300 | 3230/1465 | 2845/1290 | 3900/1770 | | 4330/1965 | | 4575/2075 | |
| | | 15/25 | 2205/1000 | 2580/1170 | 2955/1340 | 3330/1510 | 2930/1330 | 4025/1825 | | 4465/2025 | | 4720/2140 | |
| | | 20/30 | 2140/970 | 2500/1135 | 2865/1300 | 3230/1465 | 2845/1290 | 3900/1770 | | 4330/1965 | | 4575/2075 | |
| | | 25/40 | 2030/920 | 2380/1080 | 2735/1240 | 3075/1395 | 2845/1290 | 3715/1685 | | 4125/1870 | | 4355/1975 | |
| | | 30/50 | 1950/885 | 2280/1035 | 2625/1190 | 2955/1340 | 2810/1275 | 3560/1615 | | 3955/1795 | | 4180/1895 | |
| 270/95R38 | 140D/ 143A8 | 5/10 LT | 2755/1250 | 3085/1400 | 3395/1540 | 3725/1690 | 4090/1855 | 4465/2025 | | 5290/2400 | | 5555/2520 | |
| | | 5/10 HT | 2215/1005 | 2600/1180 | 2975/1350 | 3360/1525 | 3735/1695 | 4055/1840 | | 4440/2015 | | 4750/2155 | |
| | | 15/25 | 2280/1035 | 2680/1215 | 3065/1390 | 3460/1570 | 3860/1750 | 4180/1895 | | 4575/2075 | | 4895/2220 | |
| | | 20/30 | 2215/1005 | 2600/1180 | 2975/1350 | 3360/1525 | 3735/1695 | 4055/1840 | | 4440/2015 | | 4750/2155 | |
| | | 25/40 | 0/ | 2470/1120 | 2835/1285 | 3195/1450 | 3560/1615 | 3860/1750 | | 4220/1915 | | 4530/2055 | |
| | | 30/50 | 0/ | 2370/1075 | 2725/1235 | 3065/1390 | 3415/1550 | 3705/1680 | | 4055/1840 | | 4345/1970 | |
| | | 40/65 | 0/ | 0/ | 2590/1175 | 2920/1325 | 3250/1475 | 3525/1600 | | 3860/1750 | | 4135/1875 | |

LT = Low Torque HT = High Torque



AGRIXTRA N LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|-------------|------------|-------------------------|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | | | 41 psi | 44 psi | 46 psi | 49 psi | 52 psi | 55 psi | 58 psi | 61 psi | 64 psi | 67 psi | 70 psi |
| | | | 2.8 bar | 3 bar | 3.2 bar | 3.4 bar | 3.6 bar | 4 bar | 4 bar | 4.2 bar | 4.4 bar | 4.6 bar | 4.8 bar |
| | | | 10 LT | | | | | | | | | | |
| 420/90R30 | 147A8/B | 30 LT/10 HT | | | | | | | | | | | |
| | | | 25/40 & 30/50 | | | | | | | | | | |
| 230/95R32 | 128D | 10/15 | 4290/1940 | 4580/2080 | 4720/2140 | 4880/2040 | 5010/2280 | | 5310/2410 | | | | |
| | | 40/65 | 3200/1450 | 3420/1550 | 3520/1600 | 3640/1520 | 3740/1700 | | 3960/1800 | | | | |
| | | | 5/10 LT | 0/ | 5555/2520 | 0/ | 6240/2830 | 0/ | 6605/2995 | | 6890/3125 | 0/ | 7410/3360 |
| | | | 5/10 HT | 4650/2110 | 0/ | 5060/2295 | 5400/2450 | 0/ | 5675/2575 | | 0/ | 0/ | 0/ |
| | | | 15/25 | 4795/2175 | 0/ | 5215/2365 | 5565/2525 | 0/ | 5855/2655 | | 0/ | 0/ | 0/ |
| 270/95R32 | 136D/139A8 | 20/30 | 4650/2110 | 0/ | 5060/2295 | 5400/2450 | 0/ | 5675/2575 | | 0/ | 0/ | 0/ | |
| | | 25/40 | 4430/2010 | 0/ | 4815/2185 | 5135/2330 | 0/ | 5355/2430 | | 0/ | 0/ | 0/ | |
| | | 30/50 | 4245/1925 | 0/ | 4620/2095 | 4925/2235 | 0/ | 5180/2350 | | 0/ | 0/ | 0/ | |
| | | 40/65 | 4045/1835 | 0/ | 4400/1995 | 4695/2130 | 0/ | 4940/2240 | | 0/ | 0/ | 0/ | |
| 230/95R36 | 130D/133A8 | 5/10 LT | 5160/2340 | 0/ | 5600/2540 | | 5975/2710 | 0/ | 6285/2850 | | | | |
| | | 5/10 HT | 3955/1795 | 0/ | 4290/1945 | | 4575/2075 | 0/ | 4815/2185 | | | | |
| | | 15/25 | 4080/1850 | 0/ | 4420/2005 | | 4720/2140 | 0/ | 4970/2255 | | | | |
| | | 20/30 | 3955/1795 | 0/ | 4290/1945 | | 4575/2075 | 0/ | 4815/2185 | | | | |
| | | 25/40 | 3760/1705 | 0/ | 4090/1855 | | 4365/1980 | 0/ | 4540/2060 | | | | |
| | | 30/50 | 3605/1635 | 0/ | 3915/1775 | | 4180/1895 | 0/ | 4400/1995 | | | | |
| | | | 40/65 | 3440/1560 | 0/ | 3725/1690 | 3980/1805 | 0/ | 4190/1900 | | | | |
| | | | 5/10 LT | 6525/2960 | 0/ | 7090/3215 | 7560/3430 | 0/ | 7960/3610 | | | | |
| | | | 5/10 HT | 5005/2270 | 0/ | 5435/2465 | 5800/2630 | 0/ | 6095/2765 | | | | |
| | | | 15/25 | 5160/2340 | 0/ | 5600/2540 | 5975/2710 | 0/ | 6285/2850 | | | | |
| 270/95R36 | 139D/142A8 | 20/30 | 5005/2270 | 0/ | 5435/2465 | 5800/2630 | 0/ | 6095/2765 | | | | | |
| | | 25/40 | 4760/2160 | 0/ | 5170/2345 | 5525/2505 | 0/ | 5840/2650 | | | | | |
| | | 30/50 | 4565/2070 | 0/ | 4960/2250 | 5290/2400 | 0/ | 5565/2525 | | | | | |
| | | 40/65 | 4355/1975 | 0/ | 4720/2140 | 5040/2285 | 0/ | 5355/2430 | | | | | |
| 270/95R38 | 140D/143A8 | 5/10 LT | 0/ | 6205/2815 | 0/ | 6980/3165 | 0/ | 7365/3340 | | 7685/3485 | 0/ | 8265/3750 | |
| | | 5/10 HT | 5205/2360 | 0/ | 5645/2560 | | 6020/2730 | 0/ | 6340/2875 | | 0/ | 0/ | |
| | | 15/25 | 5355/2430 | 0/ | 5810/2635 | | 6205/2815 | 0/ | 6535/2965 | | 0/ | 0/ | |
| | | 20/30 | 5205/2360 | 0/ | 5645/2560 | | 6020/2730 | 0/ | 6340/2875 | | 0/ | 0/ | |
| | | 25/40 | 4950/2245 | 0/ | 5370/2435 | | 5730/2600 | 0/ | 6010/2725 | | 0/ | 0/ | |
| | | 30/50 | 4750/2155 | 0/ | 5150/2335 | | 5500/2495 | 0/ | 5785/2625 | | 0/ | 0/ | |
| | | | 40/65 | 4520/2050 | 0/ | 4905/2225 | 5235/2375 | 0/ | 5510/2500 | | 0/ | 0/ | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRAN

MS951R - R1 & R1W RADIAL DRIVE TIRE

VF/SERIES

AGRIXTRA N LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|-------------|----------------|-------------------------|---|-----------|-----------|-----------|-----------|------------|------------|------------|------------|------------|------------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi | 32 psi | 35 psi | 38 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar |
| 270/95R44 | 142D/ 145A8 | 5/10 LT | 3095/1405 | 3625/1645 | 4165/1890 | 4695/2130 | 5225/2370 | 5665/2570 | | 6285/2850 | | 6645/3015 | |
| | | 5/10 HT | 2380/1080 | 2790/1265 | 3195/1450 | 3595/1630 | 4010/1820 | 4345/1970 | | 4815/2185 | | 5095/2310 | |
| | | 15/25 | 2445/1110 | 2865/1300 | 3285/1490 | 3705/1680 | 4135/1875 | 4475/2030 | | 4970/2255 | | 5245/2380 | |
| | | 20/30 | 2380/1080 | 2790/1265 | 3195/1450 | 3595/1630 | 4010/1820 | 4345/1970 | | 4815/2185 | | 5095/2310 | |
| | | 25/40 | 2260/1025 | 2645/1200 | 3040/1380 | 3430/1555 | 3945/1790 | 4135/1875 | | 4585/2080 | | 4850/2200 | |
| | | 30/50 | 2170/985 | 2545/1155 | 2910/1320 | 3285/1490 | 3660/1660 | 3970/1800 | | 4400/1995 | | 4650/2110 | |
| | | 40/65 | 2060/935 | 2425/1100 | 2780/1260 | 3130/1420 | 3485/1580 | 3780/1715 | | 4190/1900 | | 4430/2010 | |
| 420/80R46 | 151A8/B | 5/10 LT | 5160/2340 | 5895/2675 | 6645/3015 | 7385/3350 | 8100/3675 | 8820/4000 | 9515/4315 | 10195/4625 | 10805/4900 | 11025/5000 | 11190/5075 |
| | | 25/40 & 30/50 | 3525/1600 | 4080/1850 | 4720/2140 | 5355/2430 | 5875/2665 | 6395/2900 | 6780/3075 | 7165/3250 | 7385/3350 | 7600/3450 | |
| 340/85R46 | 150D | 5/10 LT | 3660/1660 | 4255/1930 | 4850/2200 | 5545/2515 | 6140/2785 | 6735/3055 | | 7420/3365 | | 7815/3545 | |
| | | 5/10 HT | 3140/1425 | 3650/1655 | 4165/1890 | 4750/2155 | 5270/2390 | 5775/2620 | | 6370/2890 | | 6715/3045 | |
| | | 15/25 | 3240/1470 | 3760/1705 | 4290/1945 | 4905/2225 | 5425/2460 | 5950/2700 | | 6560/2975 | | 6910/3135 | |
| | | 20/30 | 3140/1425 | 3650/1655 | 4165/1890 | 4750/2155 | 5270/2390 | 5775/2620 | | 6370/2890 | | 6715/3045 | |
| | | 25/40 | 2985/1355 | 3470/1575 | 3955/1795 | 4530/2055 | 5015/2275 | 5500/2495 | | 6065/2750 | | 6395/2900 | |
| | | 30/50 | 2865/1300 | 3340/1515 | 3805/1725 | 4345/1970 | 4805/2180 | 5270/2390 | | 5260/2385 | | 5545/2515 | |
| | | 40/65 | 2735/1240 | 3175/1440 | 3615/1640 | 4135/1875 | 4575/2075 | 5025/2280 | | 5545/2515 | | 5830/2645 | |
| 320/90R46 | 148A8/B | 5/10 LT | 3660/1660 | 4255/1930 | 4850/2200 | 5545/2515 | 6140/2785 | 6735/3055 | | 7420/3365 | | 7815/3545 | |
| | | 5/10 HT | 3140/1425 | 3650/1655 | 4165/1890 | 4750/2155 | 5270/2390 | 5775/2620 | | 6370/2890 | | 6715/3045 | |
| | | 15/25 | 3240/1470 | 3760/1705 | 4290/1945 | 4905/2225 | 5425/2460 | 5950/2700 | | 6560/2975 | | 6910/3135 | |
| | | 20/30 | 3140/1425 | 3650/1655 | 4165/1890 | 4750/2155 | 5270/2390 | 5775/2620 | | 6370/2890 | | 6715/3045 | |
| | | 25/40 | 2985/1355 | 3470/1575 | 3955/1795 | 4530/2055 | 5015/2275 | 5500/2495 | | 6065/2750 | | 6395/2900 | |
| | | 30/50 | 2865/1300 | 3340/1515 | 3805/1725 | 4345/1970 | 4805/2180 | 5270/2390 | | 5260/2385 | | 5545/2515 | |
| | | 40/65 | 2735/1240 | 3175/1440 | 3615/1640 | 4135/1875 | 4575/2075 | 5025/2280 | | 5545/2515 | | 5830/2645 | |
| 380/90R46 | 159A8/B | 5/10 LT | 6680/3030 | 7485/3395 | 8370/3795 | 9085/4120 | 9715/4405 | 10685/4845 | 11585/5255 | 12280/5570 | 13075/5930 | 14475/6565 | |
| | | 25/40 & 30/50 | 4930/2235 | 5525/2505 | 6175/2800 | 6705/3040 | 7165/3250 | 7885/3575 | 8545/3875 | 9065/4110 | 9645/4375 | | |
| 230/95R48 | 136D/ 139A8 | 5/10 LT | 2470/1120 | 2765/1255 | 3040/1380 | 3350/1520 | 3660/1660 | 3990/1810 | | 4750/2155 | | 4980/2260 | |
| | | 5/10 HT | 1995/905 | 2335/1060 | 2680/1215 | 3010/1365 | 3350/1520 | 3640/1650 | | 3980/1805 | | 4255/1930 | |
| | | 15/25 | 2050/930 | 2405/1090 | 2755/1250 | 3095/1405 | 3450/1565 | 3750/1700 | | 4100/1860 | | 4385/1990 | |
| | | 20/30 | 1995/905 | 2335/1060 | 2680/1215 | 3010/1365 | 3350/1520 | 3640/1650 | | 3980/1805 | | 4255/1930 | |
| | | 25/40 | 0/ | 2215/1005 | 2545/1155 | 2865/1300 | 3185/1445 | 3460/1570 | | 3790/1720 | | 4055/1840 | |
| | | 30/50 | 0/ | 2125/965 | 2445/1110 | 2745/1245 | 3055/1385 | 3320/1505 | | 3640/1650 | | 3890/1765 | |
| | | 40/65 | 0/ | 0/ | 2325/1055 | 2610/1185 | 2910/1320 | 3165/1435 | | 3460/1570 | | 3705/1680 | |

LT = Low Torque HT = High Torque



AGRIXTRA N LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|-------------|----------------|-------------------------|---|-----------|-----------|---------|-----------|--------|-----------|---------|-----------|---------|-----------|
| | | | 41 psi | 44 psi | 46 psi | 49 psi | 52 psi | 55 psi | 58 psi | 61 psi | 64 psi | 67 psi | 70 psi |
| | | | 2.8 bar | 3 bar | 3.2 bar | 3.4 bar | 3.6 bar | 4 bar | 4 bar | 4.2 bar | 4.4 bar | 4.6 bar | 4.8 bar |
| 270/95R44 | 142D/ 145A8 | 5/10 LT | 7265/3295 | 0/ | 7880/3575 | | 8410/3815 | 0/ | 8865/4020 | | | | |
| | | 5/10 HT | 5565/2525 | 0/ | 6040/2740 | | 6450/2925 | 0/ | 6790/3080 | | | | |
| | | 15/25 | 5745/2605 | 0/ | 6230/2825 | | 6645/3015 | 0/ | 7000/3175 | | | | |
| | | 20/30 | 5565/2525 | 0/ | 6040/2740 | | 6450/2925 | 0/ | 6790/3080 | | | | |
| | | 25/40 | 5300/2405 | 0/ | 5755/2610 | | 6140/2785 | 0/ | 6395/2900 | | | | |
| | | 30/50 | 5080/2305 | 0/ | 5525/2505 | | 5885/2670 | 0/ | 6195/2810 | | | | |
| 420/80R46 | 151A8/B | 5/10 LT | | | | | | | | | | | |
| | | 25/40 & 30/50 | | | | | | | | | | | |
| 340/85R46 | 150D | 5/10 LT | 8610/3905 | 0/ | 9305/4220 | | 9900/4490 | | | | | | |
| | | 5/10 HT | 7385/3350 | 0/ | 7980/3620 | | 8500/3855 | | | | | | |
| | | 15/25 | 7615/3455 | 0/ | 8225/3730 | | 8750/3970 | | | | | | |
| | | 20/30 | 7385/3350 | 0/ | 7980/3620 | | 8500/3855 | | | | | | |
| | | 25/40 | 7035/3190 | 0/ | 7605/3450 | | 8090/3670 | | | | | | |
| | | 30/50 | 6105/2770 | 0/ | 6590/2990 | | 7760/3520 | | | | | | |
| 320/90R46 | 148A8/B | 5/10 LT | 8610/3905 | 0/ | 9305/4220 | | 9900/4490 | | | | | | |
| | | 5/10 HT | 7385/3350 | 0/ | 7980/3620 | | 8500/3855 | | | | | | |
| | | 15/25 | 7615/3455 | 0/ | 8225/3730 | | 8750/3970 | | | | | | |
| | | 20/30 | 7385/3350 | 0/ | 7980/3620 | | 8500/3855 | | | | | | |
| | | 25/40 | 7035/3190 | 0/ | 7605/3450 | | 8090/3670 | | | | | | |
| | | 30/50 | 6105/2770 | 0/ | 6590/2990 | | 7760/3520 | | | | | | |
| 380/90R46 | 159 A8/B | 5/10 LT | | | | | | | | | | | |
| | | 25/40 & 30/50 | | | | | | | | | | | |
| 230/95R48 | 136D/ 139A8 | 5/10 LT | 0/ | 5555/2520 | 0/ | | 6240/2830 | 0/ | 6605/2995 | | 6890/3125 | 0/ | 7410/3360 |
| | | 5/10 HT | 4650/2110 | 0/ | 5060/2295 | | 5400/2450 | 0/ | 5675/2575 | | 0/ | 0/ | 0/ |
| | | 15/25 | 4795/2175 | 0/ | 5215/2365 | | 5565/2525 | 0/ | 5855/2655 | | 0/ | 0/ | 0/ |
| | | 20/30 | 4650/2110 | 0/ | 5060/2295 | | 5400/2450 | 0/ | 5675/2575 | | 0/ | 0/ | 0/ |
| | | 25/40 | 4430/2010 | 0/ | 4815/2185 | | 5135/2330 | 0/ | 5355/2430 | | 0/ | 0/ | 0/ |
| | | 30/50 | 4245/1925 | 0/ | 4620/2095 | | 4925/2235 | 0/ | 5180/2350 | | 0/ | 0/ | 0/ |
| 40/65 | 4045/1835 | 0/ | 4400/1995 | | 4695/2130 | 0/ | 4940/2240 | | 0/ | 0/ | 0/ | | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRAN

MS951R - R1 & R1W RADIAL DRIVE TIRE

VF/SERIES

AGRIXTRA N LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|-------------|----------------|-------------------------|---|-----------|-----------|-----------|------------|------------|------------|------------|------------|------------|-----------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi | 32 psi | 35 psi | 38 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar |
| 270/95R48 | 144D/ 147A8 | 5/10 LT | 1785/810 | 2160/980 | 2535/1150 | 2900/1315 | 3275/1485 | 3640/1650 | | 3945/1790 | | 4320/1960 | |
| | | 5/10 HT | 2480/1125 | 2920/1325 | 3330/1510 | 3770/1710 | 4190/1900 | 4540/2060 | | 4970/2255 | | 5325/2415 | |
| | | 15/25 | 2555/1160 | 3010/1365 | 3440/1560 | 3880/1760 | 4310/1955 | 4675/2120 | | 5125/2325 | | 5490/2490 | |
| | | 20/30 | 2480/1125 | 2920/1325 | 3330/1510 | 3770/1710 | 4190/1900 | 4540/2060 | | 4970/2255 | | 5325/2415 | |
| | | 25/40 | 0/ | 2780/1260 | 3175/1440 | 3585/1625 | 3980/1805 | 4320/1960 | | 4730/2145 | | 5070/2300 | |
| | | 30/50 | 0/ | 2670/1210 | 3040/1380 | 3440/1560 | 3825/1735 | 4145/1880 | | 4540/2060 | | 4860/2205 | |
| | | 40/65 | 0/ | 0/ | 2900/1315 | 3275/1485 | 3640/1650 | 3945/1790 | | 4320/1960 | | 4630/2100 | |
| 380/90R50 | 160A8/B | 5/10 LT | 7100/3220 | 7895/3580 | 8665/3930 | 9495/4305 | 10310/4675 | 11070/5020 | 11865/5380 | 12670/5745 | 13450/6100 | 14885/6750 | |
| | | 25/40 & 30/50 | 5235/2375 | 5820/2640 | 6395/2900 | 7000/3175 | 7605/3450 | 8170/3705 | 8755/3970 | 9350/4240 | 9925/4500 | | |
| 300/95R52 | 151D/ 154A8 | 5/10 LT | 3815/1730 | 4265/1935 | 4685/2125 | 5150/2335 | 5645/2560 | 6150/2790 | | 7310/3315 | | 7670/3480 | |
| | | 5/10 HT | 3065/1390 | 3585/1625 | 4110/1865 | 4640/2105 | 5160/2340 | 5600/2540 | | 6120/2775 | | 6570/2980 | |
| | | 15/25 | 3165/1435 | 3695/1675 | 4235/1920 | 4785/2170 | 5315/2410 | 5775/2620 | | 6305/2860 | | 6770/3070 | |
| | | 20/30 | 3065/1390 | 3585/1625 | 4110/1865 | 4640/2105 | 5160/2340 | 5600/2540 | | 6120/2775 | | 6570/2980 | |
| | | 25/40 | 0/ | 3415/1550 | 3915/1775 | 4420/2005 | 4915/2230 | 5335/2420 | | 5830/2645 | | 6250/2835 | |
| | | 30/50 | 0/ | 3275/1485 | 3750/1700 | 4235/1920 | 4705/2135 | 5115/2320 | | 5590/2535 | | 5995/2720 | |
| | | 40/65 | 0/ | 0/ | 3570/1620 | 4035/1830 | 4485/2035 | 4870/2210 | | 5325/2415 | | 5710/2590 | |
| 320/90R54 | 151A8/B | 5/10 LT | 4055/1840 | 4495/2040 | 4915/2230 | 5370/2435 | 5950/2700 | 6470/2935 | | 7760/3520 | | 8115/3680 | |
| | | 5/10 HT | 3010/1365 | 3505/1590 | 3990/1810 | 4555/2065 | 5050/2290 | 5535/2510 | | 6030/2735 | | 6425/2915 | |
| | | 15/25 | 3120/1415 | 3640/1650 | 4135/1875 | 4720/2140 | 5235/2375 | 5745/2605 | | 6250/2835 | | 6670/3025 | |
| | | 20/30 | 3010/1365 | 3505/1590 | 3990/1810 | 4555/2065 | 5050/2290 | 5535/2510 | | 6030/2735 | | 6425/2915 | |
| | | 25/40 | | 3275/1485 | 3725/1690 | 4255/1930 | 4720/2140 | 5170/2345 | | 5635/2555 | | 6010/2725 | |
| | | 30/50 | | 3275/1485 | 3725/1690 | 4255/1930 | 4720/2140 | 5170/2345 | | 5635/2555 | | 6010/2725 | |
| 380/90R54 | 152A8/B | 5/10 LT | 5300/2405 | 5885/2670 | 6340/2875 | 6990/3170 | 7670/3480 | 8380/3800 | | 10110/4585 | | 10470/4750 | |
| | | 5/10 HT | 3935/1785 | 4520/2050 | 5190/2355 | 5865/2660 | 6535/2965 | 7210/3270 | | 7780/3530 | | 8380/3800 | |
| | | 15/25 | 4090/1855 | 4685/2125 | 5380/2440 | 6085/2760 | 6780/3075 | 7475/3390 | | 8080/3665 | | 8685/3940 | |
| | | 20/30 | 3935/1785 | 4520/2050 | 5190/2355 | 5865/2660 | 6535/2965 | 7210/3270 | | 7780/3530 | | 8380/3800 | |
| | | 25/40 | 0/ | 4220/1915 | 4850/2200 | 5480/2485 | 6105/2770 | 6735/3055 | | 7275/3300 | | 7825/3550 | |
| | | 30/50 | 0/ | 4220/1915 | 4850/2200 | 5480/2485 | 6105/2770 | 6735/3055 | | 7275/3300 | | 7825/3550 | |
| 270/95R54 | 146D | 10/15 | 2730/1240 | 3140/1420 | 4130/1880 | 4730/2140 | 5170/2350 | 5760/2610 | 6080/2760 | 6270/2840 | 6430/2920 | 6620/3000 | 6970/3160 |
| | | 40/65 | 2040/925 | 2340/1060 | 3080/1400 | 3530/1600 | 3860/1750 | 4300/1950 | 4540/2060 | 4680/2120 | 4800/2180 | 4940/2240 | 5200/2360 |

LT = Low Torque HT = High Torque



AGRIXTRA N LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|-------------|----------------|-------------------------|---|------------|-----------|-----------|------------|--------|------------|---------|------------|---------|------------|
| | | | 41 psi | 44 psi | 46 psi | 49 psi | 52 psi | 55 psi | 58 psi | 61 psi | 64 psi | 67 psi | 70 psi |
| | | | 2.8 bar | 3 bar | 3.2 bar | 3.4 bar | 3.6 bar | 4 bar | 4 bar | 4.2 bar | 4.4 bar | 4.6 bar | 4.8 bar |
| 270/95R48 | 144D/ 147A8 | 5/10 LT | 0/ | 6945/3150 | 0/ | | 7595/3445 | 0/ | 8235/3735 | | 8600/3900 | 0/ | 9260/4200 |
| | | 5/10 HT | 5820/2640 | 0/ | 6315/2865 | | 6745/3060 | 0/ | 7100/3220 | | 0/ | 0/ | 0/ |
| | | 15/25 | 5995/2720 | 0/ | 6505/2950 | | 6945/3150 | 0/ | 7320/3320 | | 0/ | 0/ | 0/ |
| | | 20/30 | 5820/2640 | 0/ | 6315/2865 | | 6745/3060 | 0/ | 7100/3220 | | 0/ | 0/ | 0/ |
| | | 25/40 | 5545/2515 | 0/ | 6010/2725 | | 6425/2915 | 0/ | 6780/3075 | | 0/ | 0/ | 0/ |
| | | 30/50 | 5315/2410 | 0/ | 5765/2615 | | 6160/2795 | 0/ | 6480/2940 | | 0/ | 0/ | 0/ |
| | | 40/65 | 5060/2295 | 0/ | 5490/2490 | | 5865/2660 | 0/ | 6175/2800 | | 0/ | 0/ | 0/ |
| 380/90R50 | 160A8/B | 5/10 LT | | | | | | | | | | | |
| | | 25/40 & 30/50 | | | | | | | | | | | |
| 300/95R52 | 151D/ 154A8 | 5/10 LT | 0/ | 8565/3885 | 0/ | | 9625/4365 | 0/ | 10150/4605 | | 10605/4810 | 0/ | 11410/5175 |
| | | 5/10 HT | 7175/3255 | 0/ | 7780/3530 | | 8310/3770 | 0/ | 8750/3970 | | 0/ | 0/ | 0/ |
| | | 15/25 | 7395/3355 | 0/ | 8025/3640 | | 8565/3885 | 0/ | 9015/4090 | | 0/ | 0/ | 0/ |
| | | 20/30 | 7175/3255 | 0/ | 7780/3530 | | 8310/3770 | 0/ | 8750/3970 | | 0/ | 0/ | 0/ |
| | | 25/40 | 6835/3100 | 0/ | 7410/3360 | | 7915/3590 | 0/ | 8265/3750 | | 0/ | 0/ | 0/ |
| | | 30/50 | 6550/2970 | 0/ | 7110/3225 | | 7595/3445 | 0/ | 7990/3625 | | 0/ | 0/ | 0/ |
| | | 40/65 | 6240/2830 | 0/ | 6770/3070 | | 7230/3280 | 0/ | 7605/3450 | | 0/ | 0/ | 0/ |
| 320/90R54 | 151A8/B | 5/10 LT | | 9015/4090 | | | 10205/4630 | | 10735/4870 | | 11410/5175 | | |
| | | 5/10 HT | 7075/3210 | | 7650/3470 | | 8135/3690 | | | | | | |
| | | 15/25 | 7340/3330 | | 7935/3600 | | 8445/3830 | | | | | | |
| | | 20/30 | 7075/3210 | | 7650/3470 | | 8135/3690 | | | | | | |
| | | 25/40 | 6615/3000 | | 7155/3245 | | 7605/3450 | | | | | | |
| | | 30/50 | 6615/3000 | | 7155/3245 | | 7605/3450 | | | | | | |
| 380/90R54 | 152A8/B | 5/10 LT | 0/ | 11740/5325 | | | | | | | | | |
| | | 5/10 HT | 0/ | 0/ | | | | | | | | | |
| | | 15/25 | 0/ | 0/ | | | | | | | | | |
| | | 20/30 | 0/ | 0/ | | | | | | | | | |
| | | 25/40 | 0/ | 0/ | | | | | | | | | |
| | | 30/50 | 0/ | 0/ | | | | | | | | | |
| 270/95R54 | 146D | 10/15 | 7400/3350 | 7610/3450 | 7830/3550 | 8040/3650 | 8240/3750 | | 8840/4020 | | | | |
| | | 40/65 | 5520/2500 | 5680/2575 | 5840/2650 | 6000/2725 | 6150/2800 | | 6600/3000 | | | | |

LT = Low Torque HT = High Torque

MAXAM AGRIXTRAN

MS951R - R1 & R1W RADIAL DRIVE TIRE

VF/SERIES



AGRIXTRA N LOAD AND INFLATION VF/SERIES

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|---------------|---------|-------------------------|---|------------|------------|------------|------------|------------|------------|--------|------------|------------|------------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 26 psi | 29 psi | 32 psi | 35 psi | 38 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 1.8 bar | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar |
| VF380/90R46 | 173D | 5/10 | | | | | | | | | 12250/5555 | 12765/5790 | 13290/6025 |
| | | 40/65 | | | | | | | | | | 9800/4445 | 10210/4630 |
| VF320/90R46 | 165D | ≤ 15 | 5645/2560 | 6590/2990 | 7520/3410 | 8390/3805 | 9435/4280 | 10320/4680 | | | 11365/5155 | | 12060/5470 |
| | | 20-30 | 4740/2150 | 5525/2505 | 6305/2860 | 7035/3190 | 7915/3590 | 8655/3925 | | | 9535/4325 | | 10120/4590 |
| | | 40-65 | 3650/1655 | 4255/1930 | 4850/2200 | 5410/2455 | 6095/2765 | 6660/3020 | | | 7330/3325 | | 7780/3530 |
| VF420/95R50 | 179D | ≤ 15 | 9280/4210 | 10870/4930 | 12455/5650 | 14045/6370 | 15630/7090 | 16955/7690 | | | 18815/8535 | | 19875/9015 |
| | | 20-30 | 7780/3530 | 9115/4135 | 10450/4740 | 11785/5345 | 13120/5950 | 14220/6450 | | | 15775/7155 | | 16665/7560 |
| | | 40-65 | 5985/2715 | 7010/3180 | 8035/3645 | 9060/4110 | 10085/4575 | 10935/4960 | | | 12135/5505 | | 12820/5815 |
| VF380/105R50* | 179D | 5/10 LT | | | 8090/3670 | 9015/4090 | 10150/4605 | 11100/5035 | | | 12225/5545 | | 12975/5885 |
| | | 5/10 HT | | | 7495/3400 | 8365/3795 | 9415/4270 | 10285/4665 | | | 11330/5140 | | 12025/5455 |
| | | 15/25 | | | 7575/3435 | 8445/3830 | 9500/4310 | 10385/4710 | | | 11440/5190 | | 12145/5510 |
| | | 20/30 | | | 7495/3400 | 8365/3795 | 9415/4270 | 10285/4665 | | | 11330/5140 | | 12025/5455 |
| | | 25/40 | | | 7350/3335 | 8200/3720 | 9225/4185 | 10085/4575 | | | 11110/5040 | | 11795/5350 |
| | | 30/50 | | | 7350/3335 | 8200/3720 | 9225/4185 | 10085/4575 | | | 11110/5040 | | 11795/5350 |
| 40/65 | | | 7350/3335 | 8200/3720 | 9225/4185 | 10085/4575 | | | 11110/5040 | | 11795/5350 | | |



AGRIXTRA N LOAD AND INFLATION **VF/SERIES**

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|---------------|---------|-------------------------|---|-------------|-------------|------------|-------------|------------|------------|------------|------------|---------|---------|
| | | | 41 psi | 44 psi | 46 psi | 49 psi | 52 psi | 55 psi | 58 psi | 61 psi | 64 psi | 67 psi | 70 psi |
| | | | 2.8 bar | 3 bar | 3.2 bar | 3.4 bar | 3.6 bar | 4 bar | 4 bar | 4.2 bar | 4.4 bar | 4.6 bar | 4.8 bar |
| VF380/90R46 | 173D | 5/10 | 13800/6255 | 14315/6495 | 14825/6725 | 15340/6955 | 15865/7195 | 16375/7425 | 16900/7665 | 17400/7895 | 17915/8125 | | |
| | | 40/65 | 11040/5005 | 11450/5195 | 11860/5380 | 12270/5565 | 12690/5755 | 13100/5940 | 13520/6130 | 13920/6315 | 14330/6500 | | |
| VF320/90R46 | 165D | ≤ 15 | 13285/6025 | | 14340/6505 | | 15210/6900 | | 16085/7295 | | 17485/7930 | | |
| | | 20-30 | 11145/5055 | | 12025/5455 | | 12755/5785 | | 13490/6120 | | 14660/6650 | | |
| | | 40-65 | 8575/3890 | | 9250/4195 | | 9810/4450 | | 10375/4705 | | 11355/5150 | | |
| VF320/90R46 | 165D | ≤ 15 | 21715/9850 | 23580/10695 | 25165/11415 | | 26490/12015 | | | | | | |
| | | 20-30 | 18210/8260 | 19775/8970 | 21110/9575 | | 22210/10075 | | | | | | |
| | | 40-65 | 14010/6355 | 15210/6900 | 16235/7365 | | 17085/7750 | | | | | | |
| VF380/105R50* | 179D | 5/10 LT | 14285/6480 | | 15410/6990 | | 16360/7420 | | 17295/7845 | | 18795/8525 | | |
| | | 5/10 HT | 13250/6010 | | 14285/6480 | | 15170/6880 | | 16040/7275 | | 17430/7905 | | |
| | | 15/25 | 13370/6065 | | 14430/6545 | | 15310/6945 | | 16195/7345 | | 17605/7985 | | |
| | | 20/30 | 13250/6010 | | 14285/6480 | | 15170/6880 | | 16040/7275 | | 17430/7905 | | |
| | | 25/40 | 12985/5890 | | 14010/6355 | | 14870/6745 | | 15720/7130 | | 17085/7750 | | |
| | | 30/50 | 12985/5890 | | 14010/6355 | | 14870/6745 | | 15720/7130 | | 17085/7750 | | |
| | | 40/65 | 12985/5890 | | 14010/6355 | | 14870/6745 | | 15720/7130 | | 17085/7750 | | |

MAXAM MS971R **TRACXTRA**

R4 MPT

The MS971R is engineered to meet the diverse demands of today's multi-functional farm and contracting equipment. Designed to tackle a wide range of hard surface or multi-soil conditions, the MS971R encompasses a robust casing structure and steel-belted technology, ensuring uniform ground pressure distribution, reduced rolling resistance, and exceptional traction. The MS971R's unique blend of durability and comfort enables maximum performance in the field, on highways, and in challenging on- or off-road work environments.

- ▶ Reinforced Steel-belted Radial Construction
- ▶ Radial MPT (R-4) Multi-surface Tread Depth
- ▶ Optimized Rolling Resistance
- ▶ All-Season Enhanced Traction
- ▶ Reduced Noise and Vibration
- ▶ Stability and Precise Handling



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I./ S.R.I. | Tread Depth 32nds mm | Weight lbs kg | Number of Lugs | 75% of Int. Vol. gal l | Gross Flat Plate sq in sq cm |
|-------------|-----------|---------|------|------------|----------------------------------|------|-----|------|------|--------|-----|-------|------|----------------|----------------------|---------------|----------------|------------------------|------------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | | | |
| - | 440/80R28 | 152D | TL | DW14L | DW13 W15L DW15L W16L DW16L | 17.9 | 455 | 55.5 | 1410 | 24.2 | 614 | 166.7 | 4235 | 41 675 | 37 29 | 245 | 2 x 42 | 66.3 251 | 220 1417 |
| - | 540/65R30 | 156D | TL | DW18L | DW15L DW16L | 21.7 | 551 | 56.5 | 1436 | 26 | 661 | 169.8 | 4313 | 42 700 | 39 31 | 309 | 2 x 38 | 85.3 323 | 255 1647 |
| - | 480/80R38 | 161D | TL | DW16L | DW15L DW18L | 19.9 | 506 | 68.2 | 1732 | 31.3 | 795 | 205.4 | 5217 | 45 825 | 36 29 | 363 | 2 x 48 | 101.7 385 | 285 1836 |
| - | 650/65R42 | 171D | TL | DW20B | DW18L DW23B | 25.6 | 650 | 74.6 | 1896 | 34.2 | 869 | 220.6 | 5603 | 46 925 | 40 32 | 527 | 2 x 40 | 169.3 641 | 413 2666 |



MS971R LOAD AND INFLATION

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | | |
|-------------|---------|-------------------------|---|-----------|-----------|------------|------------|------------|------------|------------|------------|--------|-------------|
| | | | 9 psi | 12 psi | 15 psi | 18 psi | 20 psi | 23 psi | 29 psi | 35 psi | 41 psi | 44 psi | 46 psi |
| | | | 0.6 bar | 0.8 bar | 1 bar | 1.2 bar | 1.4 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3 bar | 3.2 bar |
| 440/80R28 | 152D | 5/10 LT | 4220/1915 | 4915/2230 | 5620/2550 | 6325/2870 | 7020/3185 | 7740/3510 | 9140/4145 | 10540/4780 | 11960/5425 | | 13360/6060 |
| | | 5/10 HT | 3240/1470 | 3770/1710 | 4310/1955 | 4850/2200 | 5390/2445 | 5930/2690 | 7000/3175 | 8080/3665 | 9170/4160 | | 10240/4645 |
| | | 15/25 | 2985/1355 | 3470/1575 | 3980/1805 | 4475/2030 | 4960/2250 | 5465/2480 | 6460/2930 | 7450/3380 | 8445/3830 | | 9435/4280 |
| | | 20/30 | 2930/1330 | 3405/1545 | 3900/1770 | 4385/1990 | 4870/2210 | 5355/2430 | 6340/2875 | 7310/3315 | 8290/3760 | | 9260/4200 |
| | | 25/40 | 2810/1275 | 3275/1485 | 3750/1700 | 4220/1915 | 4685/2125 | 5160/2340 | 6095/2765 | 7020/3185 | 7970/3615 | | 8820/4000 |
| | | 30/50 | 2555/1160 | 2985/1355 | 3415/1550 | 3835/1740 | 4265/1935 | 4695/2130 | 5545/2515 | 6395/2900 | 7255/3290 | | 8100/3675 |
| | | 40/65 | 2445/1110 | 2855/1295 | 3265/1480 | 3670/1665 | 4080/1850 | 4485/2035 | 5300/2405 | 6120/2775 | 6935/3145 | | 7825/3550 |
| 540/65R30 | 156D | 5/10 LT | 4795/2175 | 5580/2530 | 6380/2895 | 7185/3260 | 7970/3615 | 8775/3980 | 10375/4705 | 11960/5425 | 13570/6155 | | 15155/6875 |
| | | 5/10 HT | 3670/1665 | 4275/1940 | 4895/2220 | 5510/2500 | 6120/2775 | 6725/3050 | 7950/3605 | 9170/4160 | 10405/4720 | | 11620/5270 |
| | | 15/25 | 3385/1535 | 3945/1790 | 4510/2045 | 5080/2305 | 5635/2555 | 6205/2815 | 7330/3325 | 8455/3835 | 9590/4350 | | 10715/4860 |
| | | 20/30 | 3320/1505 | 3870/1755 | 4420/2005 | 4980/2260 | 5535/2510 | 6085/2760 | 7185/3260 | 8290/3760 | 9405/4265 | | 10515/4770 |
| | | 25/40 | 3195/1450 | 3715/1685 | 4255/1930 | 4795/2175 | 5315/2410 | 5855/2655 | 6910/3135 | 7970/3615 | 9050/4105 | | 10195/4625 |
| | | 30/50 | 2910/1320 | 3385/1535 | 3870/1755 | 4355/1975 | 4840/2195 | 5325/2415 | 6295/2855 | 7255/3290 | 8235/3735 | | 9195/4170 |
| | | 40/65 | 2780/1260 | 3240/1470 | 3705/1680 | 4165/1890 | 4630/2100 | 5095/2310 | 6020/2730 | 6935/3145 | 7870/3570 | | 8820/4000 |
| 480/80R38 | 161D | 5/10 LT | 5555/2520 | 6470/2935 | 7410/3360 | 8335/3780 | 9250/4195 | 10185/4620 | 12025/5455 | 13880/6295 | 15740/7140 | 0/ | 17580/7975 |
| | | 5/10 HT | 4265/1935 | 4960/2250 | 5675/2575 | 6395/2900 | 7090/3215 | 7805/3540 | 9225/4185 | 10635/4825 | 12070/5475 | 0/ | 13480/6115 |
| | | 15/25 | 3925/1780 | 4575/2075 | 5235/2375 | 5885/2670 | 6535/2965 | 7200/3265 | 8500/3855 | 9810/4450 | 11120/5045 | 0/ | 12425/5635 |
| | | 20/30 | 3860/1750 | 4485/2035 | 5135/2330 | 5775/2620 | 6415/2910 | 7055/3200 | 8345/3785 | 9625/4365 | 10915/4950 | 0/ | 12125/5500 |
| | | 25/40 | 3705/1680 | 4310/1955 | 4940/2240 | 5555/2520 | 6160/2795 | 6790/3080 | 8025/3640 | 9250/4195 | 10495/4760 | 0/ | 11730/5320 |
| | | 30/50 | 3375/1530 | 3925/1780 | 4485/2035 | 5060/2295 | 5610/2545 | 6175/2800 | 7295/3310 | 8420/3820 | 9545/4330 | 0/ | 10670/4840 |
| | | 40/65 | 3220/1460 | 3760/1705 | 4300/1950 | 4840/2195 | 5370/2435 | 5910/2680 | 6980/3165 | 8045/3650 | 9125/4140 | 0/ | 10195/4625 |
| 650/65R42 | 171D | 5/10 LT | 7450/3380 | 8685/3940 | 9930/4505 | 11190/5075 | 12410/5630 | 13660/6195 | 16140/7320 | 18620/8445 | 21120/9580 | 0/ | 23600/10705 |
| | | 5/10 HT | 5720/2595 | 6660/3020 | 7615/3455 | 8575/3890 | 9515/4315 | 10470/4750 | 12380/5615 | 14275/6475 | 16195/7345 | 0/ | 18090/8205 |
| | | 15/25 | 5270/2390 | 6140/2785 | 7020/3185 | 7905/3585 | 8775/3980 | 9655/4380 | 11410/5175 | 13160/5970 | 14925/6770 | 0/ | 16680/7565 |
| | | 20/30 | 5170/2345 | 6020/2730 | 6890/3125 | 7750/3515 | 8610/3905 | 9470/4295 | 11190/5075 | 12910/5855 | 14640/6640 | 0/ | 16360/7420 |
| | | 25/40 | 4970/2255 | 5785/2625 | 6625/3005 | 7450/3380 | 8280/3755 | 9105/4130 | 10760/4880 | 12410/5630 | 14075/6385 | 0/ | 15655/7100 |
| | | 30/50 | 4520/2050 | 5270/2390 | 6030/2735 | 6790/3080 | 7530/3415 | 8290/3760 | 9790/4440 | 11300/5125 | 12810/5810 | 0/ | 14320/6495 |
| | | 40/65 | 4320/1960 | 5040/2285 | 5765/2615 | 6495/2945 | 7200/3265 | 7925/3595 | 9360/4245 | 10805/4900 | 12245/5555 | 0/ | 13560/6150 |

MAXAM AGILXTRA

MS962R - RADIAL IMPLEMENT I3 FLOTATION TIRE

Steel-reinforced radial flotation implement tires for agricultural tanker and trailer applications. Belt-stabilized tread provides longest treadwear, high stability and high resistance to punctures and field hazards. Optimized tread pattern provides excellent field traction while minimizing vibration at roading speeds.

- ▶ Steel-belted construction provides high puncture resistance
- ▶ Aggressive tread pattern designed for high traction
- ▶ Excellent lateral stability for field work and roading
- ▶ Wear and cut resistant tread compound ideal for mixed use applications



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | Type | Rim (Rec.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | Gross Flat Plate sq in sq cm |
|-------------|-------------|---------|------|------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|------------------------------|
| | | | | | in | mm | in | mm | in | mm | in | mm | | | | | |
| V954004 | 560/45R22.5 | 155D | TL | AG16.00 | 21.4 | 543 | 42.4 | 1076 | 19.1 | 484 | 128.4 | 3260 | 36 525 | 28 22 | 194 88 | 49.6 188 | 217 1399 |
| V954005 | 710/45R22.5 | 165D | TL | AG24.00 | 28.6 | 727 | 47.7 | 1212 | 21.5 | 545 | 144.5 | 3670 | 38 575 | 29 23 | 293 133 | 94.8 359 | 317 2046 |
| V954002 | 710/50R26.5 | 170D | TL | AG24.00 | 28.6 | 727 | 54.5 | 1383 | 24.5 | 622 | 165.0 | 4190 | 41 650 | 31 25 | 373 169 | 121.2 459 | 342 2207 |
| V954001 | 600/55R26.5 | 165D | TL | AG20.00 | 24.1 | 611 | 52.5 | 1333 | 23.6 | 600 | 159.1 | 4040 | 40 625 | 31 25 | 311 141 | 90 341 | 269 1733 |
| V954006 | 650/55R26.5 | 169D | TL | AG20.00 | 25.4 | 645 | 54.7 | 1389 | 24.6 | 625 | 165.8 | 4210 | 41 650 | 31 25 | 326 148 | 108.2 410 | 313 2019 |
| V954003 | 500/60R22.5 | 155D | TL | AG16.00 | 19.8 | 503 | 46.1 | 1172 | 20.8 | 527 | 139.8 | 3550 | 37 550 | 28 22 | 211 96 | 58.6 222 | 366 2363 |
| V954000 | 560/60R22.5 | 165D | TL | AG16.00 | 21.4 | 543 | 49.0 | 1244 | 22.1 | 560 | 148.5 | 3770 | 39 600 | 28 22 | 247 112 | 74.7 283 | 294 1897 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS **VF/SERIES**

| Item Number | Size | LI / SS | Type | Rim (Rec.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | Gross Flat Plate sq in sq cm |
|-------------|---------------|---------|------|------------|------|-----|------|------|--------|-----|-------|------|------------------|----------------------------|---------------------|---------------------------------|---------------------------------------|
| | | | | | in | mm | in | mm | in | mm | in | mm | | | | | |
| V954007 | VF560/60R22.5 | 167D | TL | AG16.00 | 22.0 | 554 | 49.0 | 1236 | 21.0 | 532 | 145 | 3695 | 39 600 | 28 22 | 267 121 | 72.1 273 | 309 1994 |
| V954008 | VF600/55R26.5 | 173D | TL | AG24.00 | 24.0 | 616 | 52.0 | 1327 | 23.0 | 586 | 156.0 | 3966 | 40 625 | 31 25 | 328 149 | 118.0 447 | 332 2141 |

MAXAM AGILXTRA

MS962R - RADIAL IMPLEMENT I3 FLOTATION TIRE

Steel-reinforced radial flotation implement tires for agricultural tanker and trailer applications. Belt-stabilized tread provides longest treadwear, high stability and high resistance to punctures and field hazards. Optimized tread pattern provides excellent field traction while minimizing vibration at roading speeds.

- ▶ Steel-belted construction provides high puncture resistance
- ▶ Aggressive tread pattern designed for high traction
- ▶ Excellent lateral stability for field work and roading
- ▶ Wear and cut resistant tread compound ideal for mixed use applications

MS962R LOAD AND INFLATION

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|-------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|------------|------------|-------------|
| | | | 12 psi | 17 psi | 23 psi | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi |
| | | | 0.8 bar | 1.2 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar |
| 560/45R22.5 | 155D | 5/10 LT | 4330/1965 | 5555/2520 | 6900/3130 | 7850/3560 | 9070/4115 | 10295/4670 | 11235/5095 | 12325/5590 | 13535/6140 |
| | | 5/10 HT | 3780/1715 | 4850/2200 | 6030/2735 | 6855/3110 | 7915/3590 | 8985/4075 | 9810/4450 | 10760/4880 | 11815/5360 |
| | | 15/25 | 3955/1795 | 5070/2300 | 6305/2860 | 7175/3255 | 8290/3760 | 9405/4265 | 10265/4655 | 11255/5105 | 12370/5610 |
| | | 20/30 | 3780/1715 | 4850/2200 | 6030/2735 | 6855/3110 | 7915/3590 | 8985/4075 | 9810/4450 | 10760/4880 | 11815/5360 |
| | | 25/40 | 3405/1545 | 4365/1980 | 5425/2460 | 6175/2800 | 7130/3235 | 8090/3670 | 8830/4005 | 9690/4395 | 10650/4830 |
| | | 30/50 | 3030/1375 | 3880/1760 | 4830/2190 | 5490/2490 | 6350/2880 | 7200/3265 | 7860/3565 | 8620/3910 | 9470/4295 |
| | | 40/65 | 2500/1135 | 3210/1455 | 3990/1810 | 4540/2060 | 5245/2380 | 5950/2700 | 6495/2945 | 7120/3230 | 7825/3550 |
| 710/45R22.5 | 165D | 5/10 LT | 6285/2850 | 8060/3655 | 10020/4545 | 11400/5170 | 13160/5970 | 14925/6770 | 16305/7395 | 17880/8110 | 19645/8910 |
| | | 5/10 HT | 5490/2490 | 7035/3190 | 8740/3965 | 9945/4510 | 11485/5210 | 13030/5910 | 14230/6455 | 15600/7075 | 17140/7775 |
| | | 15/25 | 5745/2605 | 7350/3335 | 9150/4150 | 10405/4720 | 12015/5450 | 13635/6185 | 14890/6755 | 16325/7405 | 17935/8135 |
| | | 20/30 | 5490/2490 | 7035/3190 | 8740/3965 | 9945/4510 | 11485/5210 | 13030/5910 | 14230/6455 | 15600/7075 | 17140/7775 |
| | | 25/40 | 4940/2240 | 6325/2870 | 7870/3570 | 8950/4060 | 10350/4695 | 11740/5325 | 12820/5815 | 14055/6375 | 15445/7005 |
| | | 30/50 | 4400/1995 | 5635/2555 | 7010/3180 | 7970/3615 | 9205/4175 | 10440/4735 | 11400/5170 | 12500/5670 | 13735/6230 |
| | | 40/65 | 3640/1650 | 4650/2110 | 5785/2625 | 6580/2985 | 7605/3450 | 8630/3915 | 9425/4275 | 10330/4685 | 11355/5150 |
| 710/50R26.5 | 170D | 5/10 LT | 7320/3320 | 9380/4255 | 11675/5295 | 13270/6020 | 15335/6955 | 17395/7890 | 18995/8615 | 20825/9445 | 22885/10380 |
| | | 5/10 HT | 6395/2900 | 8190/3715 | 10185/4620 | 11585/5255 | 13380/6070 | 15180/6885 | 16580/7520 | 18175/8245 | 19975/9060 |
| | | 15/25 | 6690/3035 | 8565/3885 | 10660/4835 | 12125/5500 | 14000/6350 | 15885/7205 | 17350/7870 | 19015/8625 | 20900/9480 |
| | | 20/30 | 6395/2900 | 8190/3715 | 10185/4620 | 11585/5255 | 13380/6070 | 15180/6885 | 16580/7520 | 18175/8245 | 19975/9060 |
| | | 25/40 | 5755/2610 | 7375/3345 | 9170/4160 | 10440/4735 | 12050/5465 | 13670/6200 | 14935/6775 | 16370/7425 | 17990/8160 |
| | | 30/50 | 5125/2325 | 6560/2975 | 8170/3705 | 9280/4210 | 10725/4865 | 12170/5520 | 13285/6025 | 14560/6605 | 16005/7260 |
| | | 40/65 | 4235/1920 | 5425/2460 | 6745/3060 | 7670/3480 | 8865/4020 | 10055/4560 | 10980/4980 | 12035/5460 | 13230/6000 |

LT = Low Torque HT = High Torque

MS962R LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|-------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|------------|------------|-------------|
| | | | 12 psi | 17 psi | 23 psi | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi |
| | | | 0.8 bar | 1.2 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar |
| 600/55R26.5 | 165D | 5/10 LT | 6285/2850 | 8060/3655 | 10020/4545 | 11400/5170 | 13160/5970 | 14925/6770 | 16305/7395 | 17880/8110 | 19645/8910 |
| | | 5/10 HT | 5490/2490 | 7035/3190 | 8740/3965 | 9945/4510 | 11485/5210 | 13030/5910 | 14230/6455 | 15600/7075 | 17140/7775 |
| | | 15/25 | 5745/2605 | 7350/3335 | 9150/4150 | 10405/4720 | 12015/5450 | 13635/6185 | 14890/6755 | 16325/7405 | 17935/8135 |
| | | 20/30 | 5490/2490 | 7035/3190 | 8740/3965 | 9945/4510 | 11485/5210 | 13030/5910 | 14230/6455 | 15600/7075 | 17140/7775 |
| | | 25/40 | 4940/2240 | 6325/2870 | 7870/3570 | 8950/4060 | 10350/4695 | 11740/5325 | 12820/5815 | 14055/6375 | 15445/7005 |
| | | 30/50 | 4400/1995 | 5635/2555 | 7010/3180 | 7970/3615 | 9205/4175 | 10440/4735 | 11400/5170 | 12500/5670 | 13735/6230 |
| | | 40/65 | 3640/1650 | 4650/2110 | 5785/2625 | 6580/2985 | 7605/3450 | 8630/3915 | 9425/4275 | 10330/4685 | 11355/5150 |
| 650/55R26.5 | 169D | 5/10 LT | 7075/3210 | 9070/4115 | 11275/5115 | 12830/5820 | 14825/6725 | 16810/7625 | 18365/8330 | 20130/9130 | 22125/10035 |
| | | 5/10 HT | 6185/2805 | 7915/3590 | 9845/4465 | 11200/5080 | 12940/5870 | 14670/6655 | 16030/7270 | 17570/7970 | 19310/8760 |
| | | 15/25 | 6460/2930 | 8280/3755 | 10305/4675 | 11720/5315 | 13535/6140 | 15355/6965 | 16765/7605 | 18385/8340 | 20205/9165 |
| | | 20/30 | 6185/2805 | 7915/3590 | 9845/4465 | 11200/5080 | 12940/5870 | 14670/6655 | 16030/7270 | 17570/7970 | 19310/8760 |
| | | 25/40 | 5565/2525 | 7130/3235 | 8875/4025 | 10085/4575 | 11650/5285 | 13215/5995 | 14430/6545 | 15830/7180 | 17395/7890 |
| | | 30/50 | 4950/2245 | 6340/2875 | 7895/3580 | 8975/4070 | 10360/4700 | 11760/5335 | 12840/5825 | 14075/6385 | 15475/7020 |
| | | 40/65 | 4090/1855 | 5245/2380 | 6525/2960 | 7420/3365 | 8565/3885 | 9720/4410 | 10615/4815 | 11640/5280 | 12785/5800 |
| 500/60R22.5 | 155D | 5/10 LT | 4730/2145 | 6065/2750 | 7540/3420 | 8575/3890 | 9900/4490 | 11235/5095 | 12270/5565 | 13450/6100 | 14780/6705 |
| | | 5/10 HT | 4125/1870 | 5290/2400 | 6580/2985 | 7485/3395 | 8640/3920 | 9800/4445 | 10705/4855 | 11740/5325 | 12895/5850 |
| | | 15/25 | 4320/1960 | 5535/2510 | 6880/3120 | 7825/3550 | 9040/4100 | 10265/4655 | 11200/5080 | 12280/5570 | 13505/6125 |
| | | 20/30 | 4125/1870 | 5290/2400 | 6580/2985 | 7485/3395 | 8640/3920 | 9800/4445 | 10705/4855 | 11740/5325 | 12895/5850 |
| | | 25/40 | 3715/1685 | 4760/2160 | 5930/2690 | 6735/3055 | 7780/3530 | 8830/4005 | 9645/4375 | 10570/4795 | 11620/5270 |
| | | 30/50 | 3305/1500 | 4235/1920 | 5270/2390 | 5995/2720 | 6925/3140 | 7860/3565 | 8575/3890 | 9405/4265 | 10340/4690 |
| | | 40/65 | 2735/1240 | 3505/1590 | 4355/1975 | 4960/2250 | 5720/2595 | 6495/2945 | 7090/3215 | 7770/3525 | 8545/3875 |
| 560/60R22.5 | 165D | 5/10 LT | 3925/1780 | 7265/3295 | 8840/4010 | 10020/4545 | 11585/5255 | 13560/6150 | 14540/6595 | 15905/7215 | 17485/7930 |
| | | 5/10 HT | 3430/1555 | 6340/2875 | 7715/3500 | 8740/3965 | 10120/4590 | 11830/5365 | 12690/5755 | 13890/6300 | 15255/6920 |
| | | 15/25 | 3585/1625 | 6635/3010 | 8070/3660 | 9150/4150 | 10580/4800 | 12380/5615 | 13270/6020 | 14530/6590 | 15960/7240 |
| | | 20/30 | 3430/1555 | 6340/2875 | 7715/3500 | 8740/3965 | 10120/4590 | 11830/5365 | 12690/5755 | 13890/6300 | 15255/6920 |
| | | 25/40 | 3085/1400 | 5710/2590 | 6945/3150 | 7870/3570 | 9105/4130 | 10660/4835 | 11430/5185 | 12510/5675 | 13745/6235 |
| | | 30/50 | 2745/1245 | 5080/2305 | 6185/2805 | 7010/3180 | 8100/3675 | 9480/4300 | 10165/4610 | 11135/5050 | 12225/5545 |
| | | 40/65 | 2270/1030 | 4200/1905 | 5115/2320 | 5785/2625 | 6700/3040 | 7835/3555 | 8400/3810 | 9195/4170 | 10110/4585 |

MS962R LOAD AND INFLATION



| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|---------------|---------|-------------------------|---|------------|------------|------------|------------|------------|------------|-------------|--------|
| | | | 12 psi | 17 psi | 23 psi | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi |
| | | | 0.8 bar | 1.2 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar |
| VF560/60R22.5 | 167D | 5/10 | 7340/3330 | 9390/4260 | 11460/5200 | 13510/6130 | 15580/7070 | 17630/8000 | 19700/8940 | | |
| | | 40/65 | 4475/2030 | 5730/2600 | 6985/3170 | 8245/3740 | 9500/4310 | 10755/4880 | 12000/5450 | | |
| VF600/55R26.5 | 173D | 5/10 | 7845/3560 | 10095/4580 | 12320/5590 | 14570/6610 | 16815/7630 | 19045/8640 | 21290/9660 | 23490/10660 | |
| | | 40/65 | 4785/2170 | 6150/2790 | 7515/3410 | 8880/4030 | 10250/4650 | 11615/5270 | 12980/5890 | 14300/6500 | |

LT = Low Torque HT = High Torque

MAXAM FLOTXTRA

MS961 - FLOTATION RADIAL IMPLEMENT TIRE I3

All-steel radial flotation implement tires for agricultural tanker and trailer applications. Belt-stabilized tread provides longest treadwear, high stability and high resistance to punctures and field hazards. Optimized non-directional block tread pattern provides excellent field traction while minimizing vibration at roading speeds.

- ▶ Radial implement tire
- ▶ Steel construction provides high durability
- ▶ Long tread life
- ▶ Excellent lateral stability
- ▶ Wide range of sizes available



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | Type | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | Gross Flat Plate sq in sq cm |
|-------------|-----------------|---------|------|----------------|------|-----|------|------|--------|-----|-------|------|------------------|----------------------------|---------------------|---------------------------------|---------------------------------------|
| | | | | | in | mm | in | mm | in | mm | in | mm | | | | | |
| 361025 | 500/60R22.5 IMP | 155D | TL | AG16.00 x 22.5 | 19.8 | 503 | 46.1 | 1172 | 20.8 | 527 | 139.8 | 3550 | 37 550 | 24 19 | 258 117 | 56 212 | 210 1357 |
| 361036 | 500/60R22.5 IMP | 161D | TL | AG16.00 x 22.5 | 19.8 | 503 | 46.1 | 1172 | 20.8 | 527 | 139.8 | 3550 | 37 550 | 24 19 | 258 117 | 56 212 | 210 1357 |
| 361034 | 560/45R22.5 IMP | 152D | TL | AG16.00 x 22.5 | 21.4 | 543 | 42.4 | 1076 | 19.1 | 484 | 128.4 | 3260 | 36 525 | 24 19 | 212 96 | 47 178 | 193 1243 |
| 361026 | 560/60R22.5 IMP | 161D | TL | AG16.00 x 22.5 | 21.4 | 543 | 49 | 1244 | 22.1 | 560 | 148.5 | 3770 | 39 600 | 24 19 | 298 135 | 71.5 271 | 251 1619 |
| 361041 | 560/60R22.5 IMP | 165D | TL | AG16.00x22.5 | 21.4 | 543 | 49 | 1244 | 22.1 | 560 | 148.5 | 3770 | 39 600 | 24 19 | 298 135 | 71.5 271 | 251 1619 |
| 361019 | 600/50R22.5 IMP | 159D | TL | AG20.00 x 22.5 | 24.1 | 611 | 46.1 | 1172 | 20.8 | 527 | 139.8 | 3550 | 37 550 | 24 19 | 286 129 | 68.7 260 | 237 1532 |
| 361038 | 600/50R22.5 IMP | 167D | TL | AG20.00 x 22.5 | 24.1 | 611 | 46.1 | 1172 | 20.8 | 527 | 139.8 | 3550 | 37 550 | 24 19 | 286 129 | 68.7 260 | 237 1527 |
| 361040 | 710/35R22.5 IMP | 157D | TL | AG24.00x22.5 | 27.4 | 696 | 42.1 | 1070 | 19 | 482 | 127.9 | 3248 | 36 525 | 24 19 | 252 114 | 61 231 | 221 1426 |
| 361024 | 710/40R22.5 IMP | 161D | TL | AG24.00 x 22.5 | 28.6 | 727 | 44.9 | 1140 | 20.2 | 513 | 136 | 3455 | 37 550 | 24 19 | 321 145 | 75.8 287 | 251 1619 |



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued



| Item Number | Size | LI / SS | Type | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l | Gross Flat Plate sq in sq cm |
|-------------|------------------------------|---------|------|----------------|------|-----|------|------|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|------------------------------|
| | | | | | in | mm | in | mm | in | mm | in | mm | | | | | |
| 361027 | 600/55R26.5 IMP | 165D | TL | AG20.00 x 26.5 | 24.1 | 611 | 52.5 | 1333 | 23.6 | 600 | 159.1 | 4040 | 40 625 | 25 20 | 353 160 | 87.6 332 | 279 1803 |
| 361028 | 650/55R26.5 IMP | 169D | TL | AG20.00 x 26.5 | 25.4 | 645 | 54.7 | 1389 | 24.6 | 625 | 165.8 | 4210 | 41 650 | 25 20 | 381 173 | 104.3 395 | 315 2031 |
| 361029 | 710/50R26.5 IMP | 170D | TL | AG24.00 x 26.5 | 28.6 | 727 | 54.5 | 1383 | 24.5 | 622 | 165 | 4190 | 41 650 | 25 20 | 435 197 | 116.7 442 | 326 2101 |
| 361030 | 800/45R26.5 IMP | 174D | TL | AG28.00 x 26.5 | 32.6 | 828 | 54.9 | 1393 | 24.7 | 627 | 166.2 | 4220 | 41 675 | 25 20 | 481 218 | 136 515 | 364 2346 |
| 361039 | 600/60R30.5 IMP | 173D | TL | AG20.00x30.5 | 24.1 | 613 | 58 | 1474 | 26.8 | 681 | 180 | 4570 | 43 725 | 29 23 | 455 206 | 137.3 520 | 325 2097 |
| 361031 | 650/65R30.5 IMP | 176D | TL | AG20.00 x 30.5 | 25.4 | 645 | 63.8 | 1621 | 28.7 | 729 | 193.3 | 4910 | 44 775 | 29 23 | 534 242 | 144.9 549 | 385 2486 |
| 361032 | 710/50R30.5 IMP | 173D | TL | AG24.00 x 30.5 | 28.6 | 727 | 58.5 | 1485 | 26.3 | 668 | 177.2 | 4500 | 42 700 | 29 23 | 497 225 | 127.5 483 | 353 2276 |
| 361033 | 750/60R30.5 IMP | 181D | TL | AG24.00 x 30.5 | 29.7 | 754 | 66 | 1675 | 29.7 | 754 | 199.8 | 5075 | 44 800 | 30 24 | 603 273 | 186.1 705 | 448 2889 |
| 361039 | 605/70R20.5 IMP (24R20.5) | 176F | TL | AG18.00 x 20.5 | 23.9 | 607 | 54.4 | 1381 | 24 | 609 | 164.8 | 4184 | 41 650 | 23 18 | 603 186 | 109.6 415 | 261 1685 |

MAXAM FLOTXTRA

MS961 - FLOTATION RADIAL IMPLEMENT TIRE I3

All-steel radial flotation implement tires for agricultural tanker and trailer applications. Belt-stabilized tread provides longest treadwear, high stability and high resistance to punctures and field hazards. Optimized non-directional block tread pattern provides excellent field traction while minimizing vibration at roading speeds.

- ▶ Radial implement tire
- ▶ Steel construction provides high durability
- ▶ Long tread life
- ▶ Excellent lateral stability
- ▶ Wide range of sizes available

FLOTXTRA LOAD AND INFLATION

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | |
|-----------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| | | | 12 psi | 17 psi | 23 psi | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi | 73 psi |
| | | | 0.8 bar | 1.2 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar | 5 bar |
| 500/60R22.5 IMP | 155D | 5/10 | 5070/2300 | 6305/2860 | 7695/3490 | 8920/4045 | 10305/4675 | 11530/5230 | 12765/5790 | 14145/6415 | 15375/6975 | |
| | | 40/65 | 2820/1280 | 3505/1590 | 4275/1940 | 4960/2250 | 5720/2595 | 6405/2905 | 7090/3215 | 7860/3565 | 8545/3875 | |
| 500/60R22.5 IMP | 161D | 5/10 | 5070/2300 | 6305/2860 | 7695/3490 | 8920/4045 | 10310/4675 | 11530/5230 | 12765/5790 | 14145/6415 | 15380/6975 | 18355/8325 |
| | | 40/65 | 2820/1280 | 3505/1590 | 4280/1940 | 4960/2250 | 5720/2595 | 6405/2905 | 7090/3215 | 7860/3565 | 8545/3875 | 10200/4625 |
| 560/45R22.5 IMP | 152D | 5/10 | 4650/2110 | 5775/2620 | 7045/3195 | 8170/3705 | 9435/4280 | 10570/4795 | 11695/5305 | 12965/5880 | 14090/6390 | |
| | | 40/65 | 2580/1170 | 3210/1455 | 3915/1775 | 4540/2060 | 5245/2380 | 5875/2665 | 6495/2945 | 7200/3265 | 7825/3550 | |
| 560/60R22.5 IMP | 161D | 5/10 | 6050/2745 | 7530/3415 | 9180/4165 | 10650/4830 | 12300/5580 | 13770/6245 | 15235/6910 | 16885/7660 | 18355/8325 | |
| | | 40/65 | 3360/1525 | 4180/1895 | 5105/2315 | 5920/2685 | 6835/3100 | 7650/3470 | 8465/3840 | 9380/4255 | 10195/4625 | |
| 560/60R22.5 IMP | 165D | 5/10 | 6055/2745 | 7530/3415 | 9185/4165 | 10650/4830 | 12305/5580 | 13770/6245 | 15235/6910 | 16890/7660 | 18355/8325 | 20440/9270 |
| | | 40/65 | 3365/1525 | 4180/1895 | 5105/2315 | 5920/2685 | 6835/3100 | 7650/3470 | 8465/3840 | 9380/4255 | 10200/4625 | 11400/5150 |
| 600/50R22.5 IMP | 159D | 5/10 | 5730/2600 | 7120/3230 | 8685/3940 | 10075/4570 | 11630/5275 | 13020/5905 | 14405/6535 | 15970/7245 | 17360/7875 | |
| | | 40/65 | 3185/1445 | 3955/1795 | 4830/2190 | 5600/2540 | 6460/2930 | 7230/3280 | 8005/3630 | 8875/4025 | 9645/4375 | |
| 600/50R22.5 IMP | 167D | 5/10 | 5730/2600 | 7120/3230 | 8685/3940 | 10075/4570 | 11630/5275 | 13020/5905 | 14405/6535 | 15970/7245 | 17360/7875 | 21630/9810 |
| | | 40/65 | 3185/1445 | 3955/1795 | 4830/2190 | 5600/2540 | 6460/2930 | 7230/3280 | 8005/3630 | 8875/4025 | 9645/4375 | 12000/5450 |
| 710/35R22.5 IMP | 161D | 5/10 | 4345/1970 | 6745/3060 | 8200/3720 | 9390/4260 | 10845/4920 | 12520/5680 | 13780/6250 | 14880/6750 | 16425/7450 | |
| | | 40/65 | 2405/1090 | 3750/1700 | 4540/2060 | 5200/2360 | 6010/2725 | 6950/3150 | 7600/3450 | 8270/3750 | 9100/4125 | |
| 710/40R22.5 IMP | 161D | 5/10 | 6050/2745 | 7530/3415 | 9180/4165 | 10650/4830 | 12300/5580 | 13770/6245 | 15235/6910 | 16885/7660 | 18355/8325 | |
| | | 40/65 | 3360/1525 | 4180/1895 | 5105/2315 | 5920/2685 | 6835/3100 | 7650/3470 | 8465/3840 | 9380/4255 | 10195/4625 | |
| 600/55R26.5 IMP | 165D | 5/10 | 6745/3060 | 8380/3800 | 10220/4635 | 11850/5375 | 13690/6210 | 15335/6955 | 16965/7695 | 18805/8530 | 20435/9270 | |
| | | 40/65 | 3750/1700 | 4650/2110 | 5675/2575 | 6580/2985 | 7605/3450 | 8520/3865 | 9425/4275 | 10450/4740 | 11355/5150 | |



FLOTXTRA LOAD AND INFLATION

Continued

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | | |
|-----------------|---------|-------------------------|---|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|
| | | | 12 psi | 17 psi | 23 psi | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi | 73 psi |
| | | | 0.8 bar | 1.2 bar | 1.6 bar | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar | 5 bar |
| 650/55R26.5 IMP | 169D | 5/10 | 7595/3445 | 9435/4280 | 11510/5220 | 13350/6055 | 15420/6995 | 17260/7830 | 19105/8665 | 21175/9605 | 23015/10440 | |
| | | 40/65 | 4220/1915 | 5245/2380 | 6395/2900 | 7420/3365 | 8565/3885 | 9590/4350 | 10615/4815 | 11760/5335 | 12785/5800 | |
| 710/50R26.5 IMP | 170D | 5/10 | 7860/3565 | 9765/4430 | 11905/5400 | 13810/6265 | 15950/7235 | 17855/8100 | 19765/8965 | 21905/9935 | 23810/10800 | |
| | | 40/65 | 4365/1980 | 5425/2460 | 6615/3000 | 7670/3480 | 8865/4020 | 9920/4500 | 10980/4980 | 12170/5520 | 13230/6000 | |
| 800/45R26.5 IMP | 174D | 5/10 | 8775/3980 | 10900/4945 | 13295/6030 | 15420/6995 | 17815/8080 | 19940/9045 | 22070/10010 | 24460/11095 | 26590/12060 | |
| | | 40/65 | 4870/2210 | 6050/2745 | 7385/3350 | 8565/3885 | 9900/4490 | 11080/5025 | 12260/5560 | 13590/6165 | 14770/6700 | |
| 600/60R30.5 IMP | 173D | 5/10 | 7530/3420 | 9640/4380 | 11880/5400 | 13270/6030 | 15360/6980 | 17340/7880 | 19320/8780 | 20990/9540 | 22970/10440 | 25740/11700 |
| | | 40/65 | | | | 7370/3350 | 8530/3875 | 9630/4375 | 10730/4875 | 11600/5300 | 12760/5800 | 14300/6500 |
| 650/65R30.5 IMP | 176D | 5/10 | 9290/4215 | 11550/5240 | 14090/6390 | 16335/7410 | 18885/8565 | 21130/9585 | 23380/10605 | 25925/11760 | 28175/12780 | |
| | | 40/65 | 5170/2345 | 6415/2910 | 7825/3550 | 9085/4120 | 10485/4755 | 11740/5325 | 12995/5895 | 14395/6530 | 15655/7100 | |
| 710/50R30.5 IMP | 173D | 5/10 | 8510/3860 | 10570/4795 | 12895/5850 | 14960/6785 | 17285/7840 | 19345/8775 | 21405/9710 | 23735/10765 | 25795/11700 | |
| | | 40/65 | 4730/2145 | 5875/2665 | 7165/3250 | 8310/3770 | 9600/4355 | 10750/4875 | 11895/5395 | 13185/5980 | 14330/6500 | |
| 750/60R30.5 IMP | 181D | 5/10 | 10805/4900 | 13425/6090 | 16370/7425 | 18995/8615 | 21935/9950 | 24560/11140 | 27170/12325 | 30115/13660 | 32740/14850 | |
| | | 40/65 | 6010/2725 | 7465/3385 | 9095/4125 | 10550/4785 | 12190/5530 | 13645/6190 | 15100/6850 | 16735/7590 | 18190/8250 | |

| Metric Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|---------------------------|---------|-------------------------|---|------------|------------|------------|------------|------------|------------|------------|-------------|
| | | | 29 psi | 36 psi | 44 psi | 51 psi | 58 psi | 65 psi | 73 psi | 80 psi | 86 psi |
| | | | 2 bar | 2.5 bar | 3 bar | 3.5 bar | 4 bar | 4.5 bar | 5 bar | 5.5 bar | 5.9 bar |
| 605/70R20.5 IMP (24R20.5) | 176F | 5/10 | 9590/4350 | 11465/5200 | 13250/6010 | 14990/6800 | 16690/7570 | 18340/8320 | 19950/9050 | 21540/9770 | 22775/10330 |
| | | 50/80 | 6590/2990 | 7870/3570 | 9105/4130 | 10320/4680 | 11465/5200 | 12610/5720 | 13715/6220 | 14795/6710 | 15655/7100 |

MAXAM MS938

R3 FLOTATION TIRE

The high flotation R3 pattern provides minimal ground compaction while providing excellent traction in the field.


- ▶ Excellent traction in all conditions
- ▶ Thick undertread for improved puncture resistance
- ▶ Low pressure minimizes soil disturbance
- ▶ Wear and cut-resistant tread compound



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | PR | Type | Rim (Rec.) | S.W. | | O.D. | | S.L.R. | | Tread Depth 32nds mm | Weight lbs kg |
|-------------|---------|----|------|------------|------|-----|------|------|--------|-----|----------------------|---------------|
| | | | | | in | mm | in | mm | in | mm | | |
| V346031 | 23.1-26 | 12 | TL | DW20 | 23.1 | 587 | 61.8 | 1570 | 28 | 712 | 23 18 | 248 129 |
| V346032 | 28L-26 | 16 | TL | DW25 | 28.2 | 717 | 62.6 | 1590 | 28 | 712 | 34 27 | 375 170 |

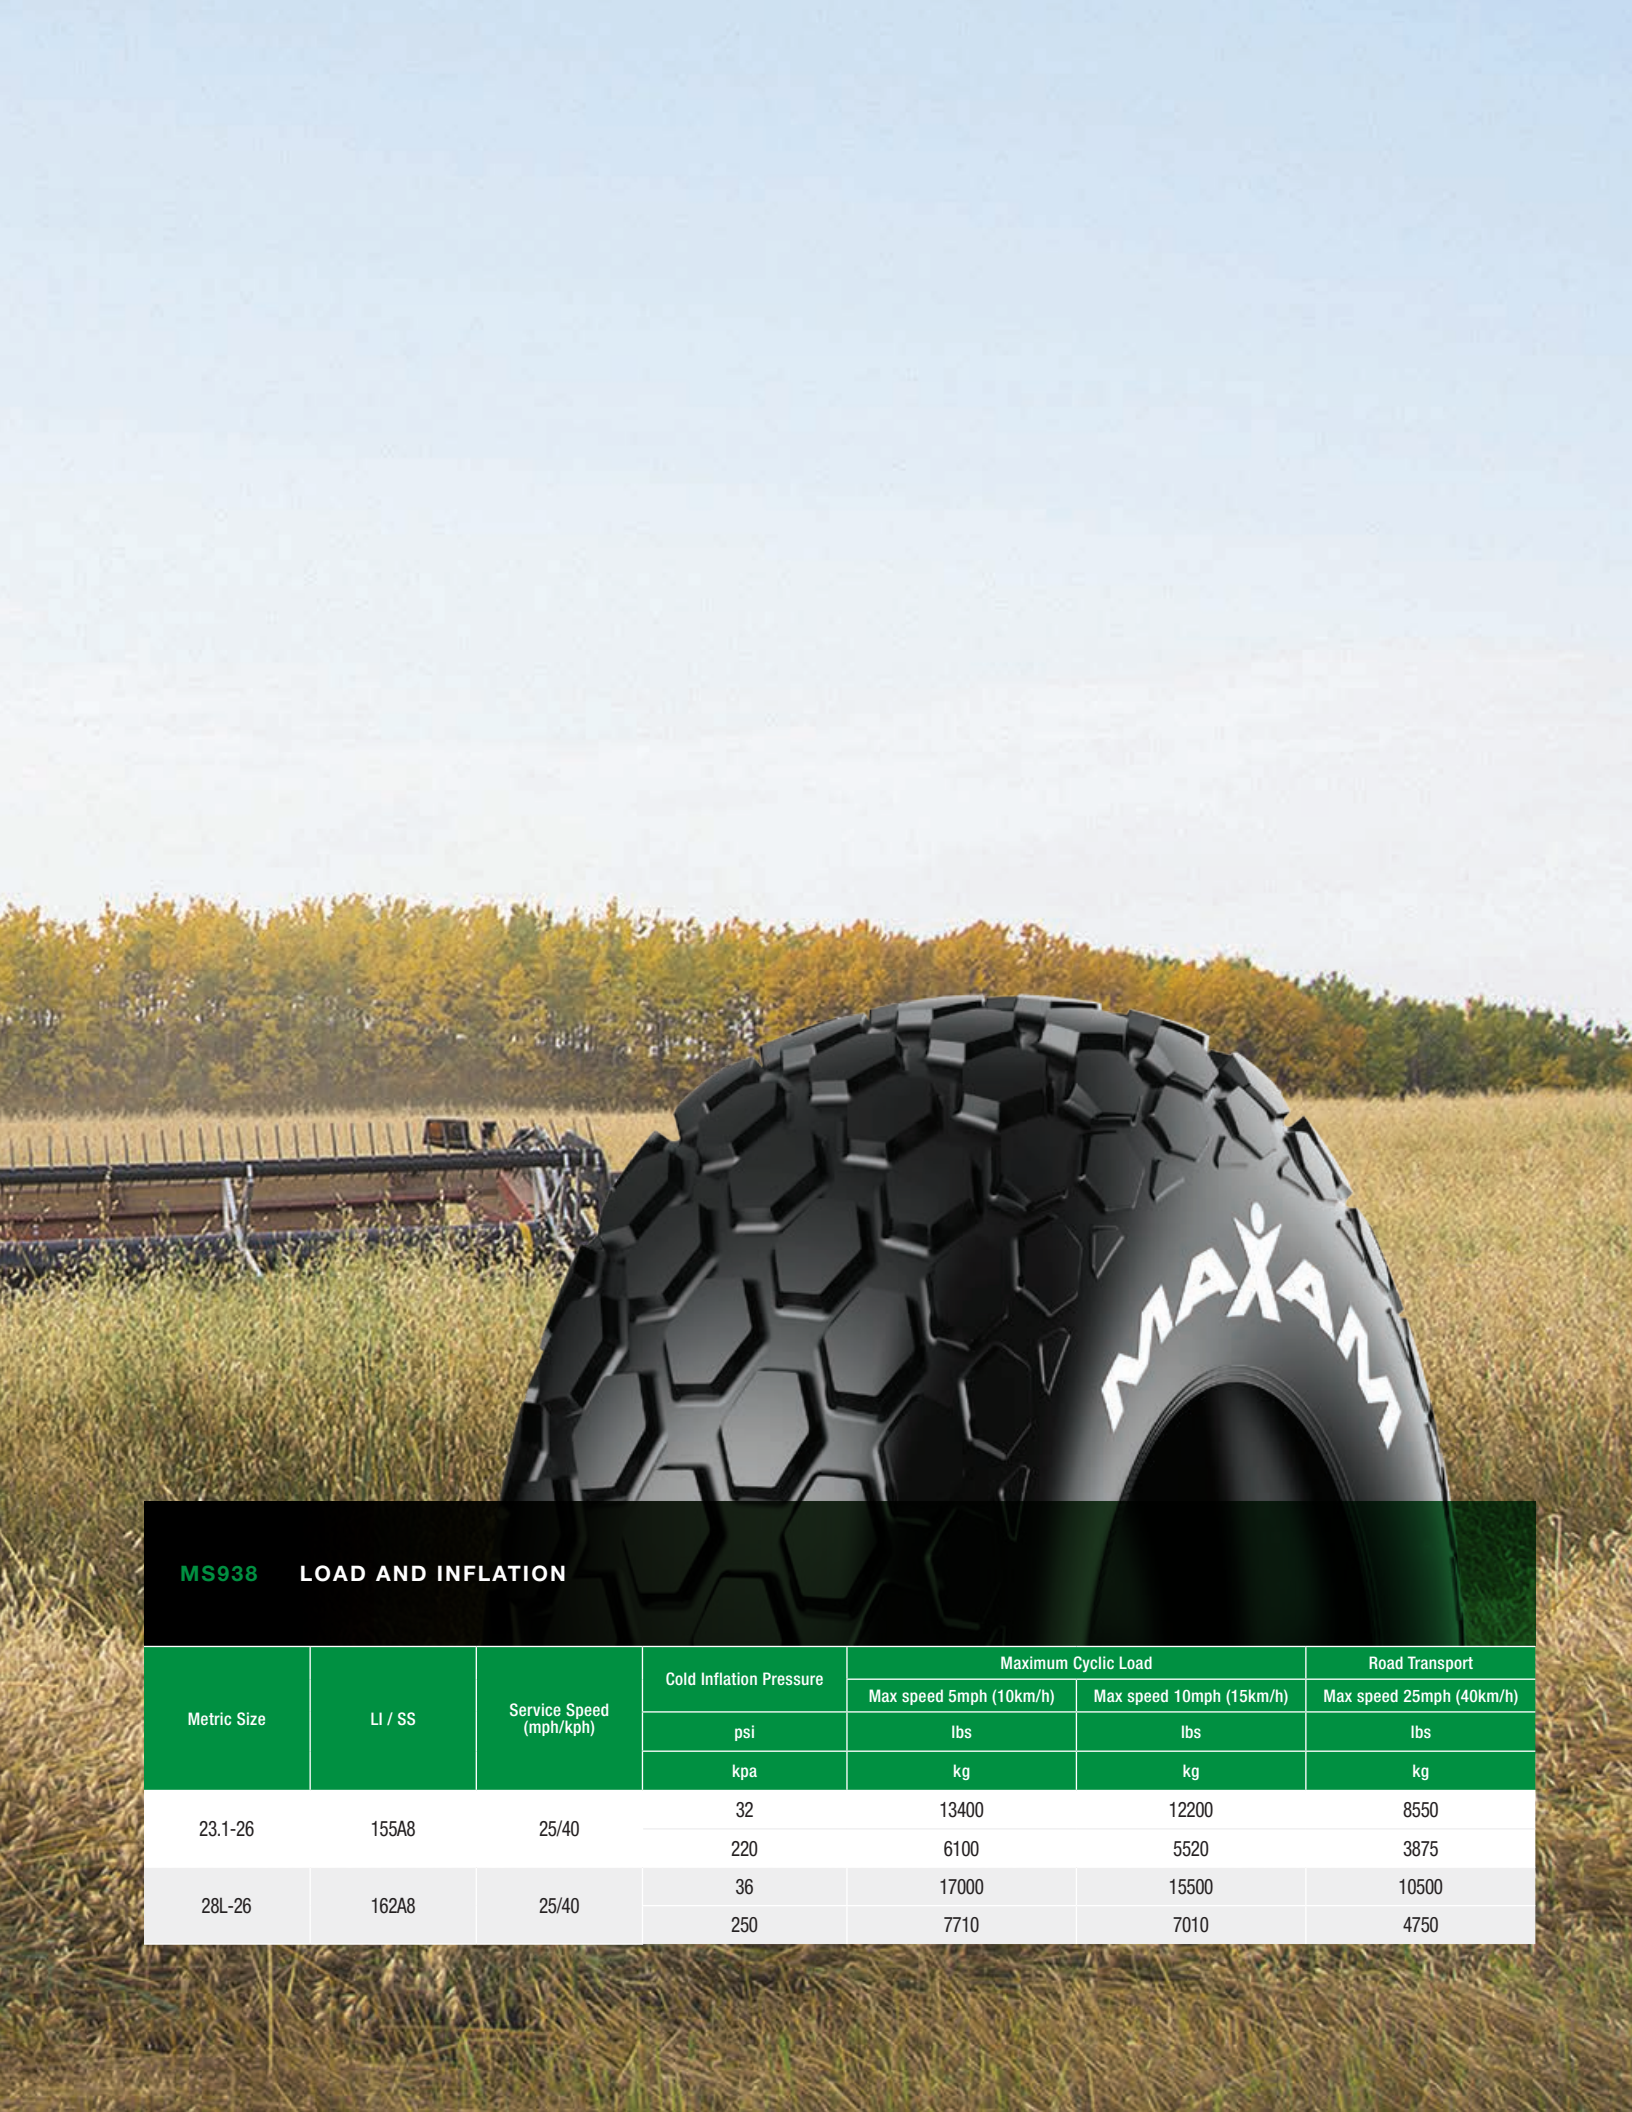

MS938 **LOAD AND INFLATION**

| Metric Size | LI / SS | Service Speed (mph/kph) | Cold Inflation Pressure | Maximum Cyclic Load | | Road Transport |
|-------------|---------|----------------------------|-------------------------|-------------------------|--------------------------|--------------------------|
| | | | | Max speed 5mph (10km/h) | Max speed 10mph (15km/h) | Max speed 25mph (40km/h) |
| | | | psi | lbs | lbs | lbs |
| | | | kpa | kg | kg | kg |
| 23.1-26 | 155A8 | 25/40 | 32 | 13400 | 12200 | 8550 |
| | | | 220 | 6100 | 5520 | 3875 |
| 28L-26 | 162A8 | 25/40 | 36 | 17000 | 15500 | 10500 |
| | | | 250 | 7710 | 7010 | 4750 |

MAXAM MS935

TERRA HIGH FLOTATION BIAS PLY TIRE HF3

Wide profile traction tire designed for high flotation and minimal soil compaction.

- ▶ Reinforced undertread and shoulder protects from cuts and stubble damage
- ▶ Cut resistant tread compound extends tire life
- ▶ Wide, aggressive tread design provides excellent traction and stability
- ▶ Large footprint reduces ground pressure and soil disturbance



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | PR | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | Tread Depth 32nds mm | Weight lbs kg |
|-------------|-------------|---------|----|------|------------|--------------|------|------|------|------|--------|-----|-------|------|----------------------|---------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | |
| V346026 | 42x25.00-20 | 142B | 16 | TL | 20.5HF | 20.5HF/VF | 24.8 | 630 | 43.8 | 1112 | 19.1 | 485 | 132.6 | 3369 | 44 35 | 247 112 |
| V346027 | 48x25.00-20 | 149B | 12 | TL | 20.5HF | 20.5HF/VF | 24.8 | 630 | 50.3 | 1277 | 22.3 | 566 | 152.4 | 3869 | 57 45 | 298 135 |
| V346028 | 48x31.00-20 | 148B | 12 | TL | 26.0HF | | 30.5 | 775 | 50.3 | 1277 | 22.4 | 569 | 152.4 | 3869 | 57 45 | 344 156 |
| V346029 | 66x43.00-25 | 174B | 20 | TL | 36.0TH | | 41.5 | 1054 | 68.5 | 1740 | 30.3 | 770 | 207.6 | 5272 | 73 58 | 818 371 |
| V346030 | 73x44.00-32 | 175B | 16 | TL | 36.0VA | | 44 | 1118 | 75.3 | 1912 | 32.8 | 833 | 228.1 | 5793 | 96 76 | 1175 533 |



MS935 LOAD AND INFLATION

| Standard Size | LI / SS | PR | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|---------------|---------|----|-------------------------|---|---------|---------|---------|---------|------------|-----------|------------|-----------|
| | | | | 15 psi | 20 psi | 25 psi | 30 psi | 35 psi | 40 psi | 45 psi | 50 psi | 60 psi |
| | | | | 1 bar | 1.4 bar | 1.7 bar | 2.1 bar | 2.4 bar | 2.8 bar | 3.1 bar | 3.4 bar | 4.1 bar |
| 42x25.00-20 | 142B | 16 | 30 | 2540 | 3000 | 3420 | 3740 | 4180 | 4400 | 4800 | 5145 | 5840 (16) |
| | | | 50 | 1150 | 1360 | 1550 | 1700 | 1900 | 2000 | 2180 | 2330 | 2650 (16) |
| 48x25.00-20 | 149B | 12 | 30 | 3740 | 4400 | 5080 | 5680 | 6150 | 6600 | 7150 (12) | | |
| | | | 50 | 1700 | 2000 | 2300 | 2575 | 2800 | 3000 | 3250 (12) | | |
| 48x31.00-20 | 148B | 12 | 30 | 3960 | 4680 | 5360 | 5840 | 6400 | 6950 (12) | | | |
| | | | 50 | 1800 | 2120 | 2430 | 2650 | 2900 | 3150 (12) | | | |
| 66x43.00-25 | 174B | 20 | 30 | 7400 | 8800 | 9900 | 11000 | 12300 | 13200 | 13900 | 14800 (20) | |
| | | | 50 | 3350 | 4000 | 4500 | 5000 | 5600 | 6000 | 6300 | 6700 (20) | |
| 73x44.00-32 | 175B | 16 | 30 | 8550 | 10200 | 11700 | 12800 | 14300 | 15200 (16) | | | |
| | | | 50 | 3875 | 4625 | 5300 | 5800 | 6500 | 6900 (16) | | | |

MAXAM MS963

BIAS PLY IMPLEMENT TIRE I1

Ribbed implement I1 pattern for high flotation and minimal soil disturbance.

- ▶ Extra wide tread design provides maximum flotation
- ▶ Deep undertread and reinforced shoulder for improved stubble resistance
- ▶ Special cut resistant compound improves wear and reduces tread chunking
- ▶ Low rolling resistance



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | PR | LI / SS | Type | Rim (Rec.) | S.W. | | O.D. | | S.L.R. | | R.C. | | Min Dual Spacing | | Tread Depth | | Weight | |
|-------------|------------|----|---------|------|------------|------|-----|------|------|--------|-----|------|------|------------------|-----|-------------|----|--------|----|
| | | | | | | in | mm | in | mm | in | mm | in | mm | in | mm | 32nds | mm | lbs | kg |
| 65029 | 6.70-15 | 6 | 978 | TL | 4.00 | 7.0 | 178 | 28.4 | 721 | 13.0 | 330 | 85 | 2159 | 8.9 | 225 | 7 | 6 | 21 | 10 |
| 65030 | 7.60-15 | 8 | 106B | TL | 5.50 | 7.6 | 193 | 28.9 | 734 | 13.2 | 335 | 87 | 2213 | 9.9 | 250 | 8 | 6 | 26 | 12 |
| 65016 | 9.5L-14 | 8 | 111B | TL | 7.00 | 9.5 | 241 | 29.4 | 747 | 13.4 | 340 | 89 | 2253 | 12 | 304 | 9 | 7 | 28 | 13 |
| 65018 | 9.5L-15 | 8 | 112B | TL | 8LB | 10.5 | 266 | 30.2 | 768 | 13.8 | 351 | 91 | 2316 | 12 | 304 | 9 | 7 | 31 | 14 |
| 65019 | 9.5L-15 | 12 | 121B | TL | 8LB | 10.5 | 266 | 30.2 | 768 | 13.8 | 351 | 91 | 2316 | 12 | 304 | 9 | 7 | 31 | 14 |
| 65017 | 11L-14 | 8 | 112B | TL | 8.00 | 11.0 | 279 | 29.7 | 754 | 13.5 | 343 | 90 | 2296 | 13.6 | 345 | 9 | 7 | 33 | 15 |
| 65020 | 11L-15 | 8 | 113B | TL | 8.00 | 10.8 | 274 | 30.2 | 767 | 13.9 | 354 | 92 | 2336 | 13.6 | 345 | 9 | 7 | 35 | 16 |
| 65021 | 11L-15 | 12 | 121B | TL | 8.00 | 10.8 | 274 | 30.2 | 767 | 13.9 | 354 | 92 | 2336 | 13.6 | 345 | 9 | 7 | 36 | 17 |
| 65022 | 12.5L-15 | 10 | 123B | TL | 10LB | 13.0 | 331 | 32.4 | 822 | 14.7 | 374 | 97 | 2464 | 15.3 | 387 | 9 | 7 | 46 | 21 |
| 65023 | 12.5L-15 | 12 | 127B | TL | 10LB | 13.0 | 331 | 32.4 | 822 | 14.7 | 374 | 97 | 2464 | 15.3 | 387 | 9 | 7 | 47 | 22 |
| 65024 | 12.5L-16 | 14 | 130B | TL | 10.00 | 12.5 | 318 | 33.4 | 848 | 15.2 | 386 | 100 | 2542 | 15.3 | 387 | 11 | 9 | 48 | 22 |
| 65025 | 16.5L-16.1 | 10 | 138B | TL | 14.00 | 16.5 | 419 | 40.8 | 1036 | 18.5 | 470 | 120 | 3049 | 19.6 | 499 | 15 | 12 | 91 | 41 |
| 65026 | 16.5L-16.1 | 14 | 145B | TL | 14.00 | 16.5 | 419 | 40.8 | 1036 | 18.5 | 470 | 120 | 3049 | 19.6 | 499 | 15 | 12 | 94 | 43 |
| 65027 | 21.5L-16.1 | 10 | 146B | TL | W16C | 21.4 | 543 | 44.1 | 1120 | 19.7 | 500 | 130 | 3296 | 25.2 | 639 | 18 | 14 | 141 | 64 |
| 65028 | 21.5L-16.1 | 14 | 152B | TL | W16C | 21.4 | 543 | 44.1 | 1120 | 19.7 | 500 | 130 | 3296 | 25.2 | 639 | 18 | 14 | 144 | 65 |

MAXAM MS965

BIAS PLY IMPLEMENT TIRE I1

Wide profile traction tire designed for high flotation and minimal soil compaction.

- ▶ Reinforced undertread and shoulder protects from cuts and stubble damage
- ▶ Cut resistant tread compound extends tire life
- ▶ Wide, aggressive tread design provides excellent traction and stability
- ▶ Large footprint reduces ground pressure and soil disturbance
- ▶ Low rolling resistance



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | PR | LI / SS | Type | Rim (Rec.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l |
|-------------|------------------|----|----------------------|------|------------|------|-----|------|-----|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | |
| 65612 | 10.0/80-12 | 10 | FR 121A8 DR 109A8 | TL | 9.00 | 10.2 | 258 | 28 | 711 | 12.6 | 321 | 83.4 | 2118 | 28 340 | 9 7 | 30 14 | 10.7 40.4 |
| 65000 | 10.0/75-15.3 IMP | 10 | FR 123A8 DR 111A8 | TL | 9.00 | 10.8 | 275 | 29.9 | 760 | 13.7 | 348 | 90.5 | 2299 | 29 360 | 11 9 | 36 16 | 11.6 44 |
| 65002 | 11.5/80-15.3 | 10 | FR 131A8 DR 119A8 | TL | 9.00 | 11.8 | 300 | 33.3 | 846 | 15.1 | 384 | 99.8 | 2534 | 31 410 | 11 9 | 45 20 | 17.4 66 |
| 65004 | 12.5/80-15.3 | 14 | FR 142A8 DR 129A8 | TL | 9.00 | 12.5 | 317 | 34.9 | 887 | 15.8 | 401 | 104.2 | 2646 | 32 430 | 11 9 | 55 25 | 21 79.6 |
| 65007 | 15.0/55-17 IMP | 14 | FR 141A8 DR 128A8 | TL | 13.00 | 15.4 | 392 | 33.4 | 848 | 15.3 | 389 | 101 | 2564 | 31 410 | 15 12 | 72 33 | 21.4 81 |

FR = Free Rolling / DR = Drive Axle



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS

Continued



| Item Number | Size | PR | LI / SS | Type | Rim (Rec.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l |
|-------------|----------------|----|-----------------------|------|------------|------|-----|------|-----|--------|-----|-------|------|---------------|----------------------|---------------|------------------------|
| | | | | | | in | mm | in | mm | in | mm | in | mm | | | | |
| 65008 | 19.0/45-17 IMP | 14 | FR 144A8 DR 131A8 | TL | 16.00 | 18.9 | 480 | 34.1 | 866 | 15.6 | 396 | 102.9 | 2613 | 32 410 | 15 12 | 84 38 | 28 106 |
| 65009 | 500/50-17 IMP | 14 | FR 149A8 DR 137A8 | TL | 16.00 | 19.8 | 502 | 36.8 | 934 | 16.7 | 424 | 110.2 | 2799 | 33 450 | 15 12 | 107 48 | 36.4 138 |
| 65010 | 13.0/65-18 IMP | 16 | FR 144A8 DR 131 A8 | TL | 11.00 | 13.5 | 343 | 35.2 | 894 | 16.1 | 410 | 106.5 | 2704 | 32 425 | 14 11 | 72 33 | 20.6 78 |
| 65011 | 15.0/70-18 IMP | 12 | FR 145A8 DR 133A8 | TL | 13.00 | 15.7 | 399 | 38.7 | 984 | 17.6 | 447 | 116.2 | 2950 | 34 475 | 16 13 | 90 41 | 31.9 121 |

FR = Free Rolling / DR = Drive Axle

MAXAM MS965

BIAS PLY IMPLEMENT TIRE I1

Wide profile traction tire designed for high flotation and minimal soil compaction.

- ▶ Reinforced undertread and shoulder protects from cuts and stubble damage
- ▶ Cut resistant tread compound extends tire life
- ▶ Wide, aggressive tread design provides excellent traction and stability
- ▶ Large footprint reduces ground pressure and soil disturbance
- ▶ Low rolling resistance

MS965 LOAD AND INFLATION

| Standard Size | LI / SS | PR | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | |
|------------------|----------|----|-------------------------|---|-----------|-----------|-----------|-----------|-----------|
| | | | | 29 psi | 32 psi | 35 psi | 38 psi | 41 psi | 44 psi |
| | | | | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar | 3 bar |
| 10.0/80-12 | FR 121A8 | 10 | 25/40 FR | | 1190/540 | 1520/690 | 1760/800 | 1980/900 | 2200/1000 |
| | DR 109A8 | | 25/40 DR | | 860/390 | 1080/490 | 1230/560 | 1390/630 | 1540/700 |
| 10.0/75-15.3 IMP | FR 123A8 | 10 | 25/40 FR | 2425/1100 | 2525/1145 | 2635/1195 | 2735/1240 | 2845/1290 | 2945/1335 |
| | DR 111A8 | | 25/40 DR | 1675/760 | 1755/795 | 1830/830 | 1905/865 | 1985/900 | 2060/935 |
| 11.5/80-15.3 | FR 131A8 | 10 | 25/40 FR | 3160/1430 | 3330/1510 | 3490/1580 | 3660/1660 | 3820/1730 | 3990/1810 |
| | DR 119A8 | | 25/40 DR | 2240/1020 | 2350/1070 | 2470/1120 | 2580/1170 | 2690/1220 | 2800/1270 |
| 12.5/80-15.3 | FR 142A8 | 14 | 25/40 FR | 3420/1550 | 3640/1650 | 3860/1750 | 4140/1880 | 4410/2000 | 4560/2070 |
| | DR 129A8 | | 25/40 DR | 2400/1090 | 2560/1160 | 2690/1220 | 2870/1300 | 3090/1400 | 3200/1450 |
| 15.0/55-17 IMP | FR 141A8 | 14 | 25/40 FR | 4245/1925 | 4385/1990 | 4530/2055 | 4680/2120 | 4815/2185 | 4960/2250 |
| | DR 128A8 | | 25/40 DR | 3020/1370 | 3120/1415 | 3210/1455 | 3300/1500 | 3405/1545 | 3495/1585 |
| 19.0/45-17 IMP | FR 144A8 | 14 | 25/40 FR | 4760/2160 | 5115/2320 | 5465/2480 | 5820/2640 | 6175/2800 | |
| | DR 131A8 | | 25/40 DR | 3340/1515 | 3585/1625 | 3815/1730 | 4055/1840 | 4300/1950 | |
| 500/50-17 IMP | FR 149A8 | 14 | 25/40 FR | 5510/2500 | 5930/2690 | 6340/2875 | 6755/3065 | 7165/3250 | |
| | DR 137A8 | | 25/40 DR | 3970/1800 | 4245/1925 | 4520/2050 | 4795/2175 | 5070/2300 | |
| 13.0/65-18 IMP | FR 144A8 | 16 | 25/40 FR | 3880/1760 | | 4200/1905 | | 4520/2050 | |
| | DR 131A8 | | 25/40 DR | 2790/1265 | | 3000/1360 | | 3210/1455 | |
| 15.0/70-18 IMP | FR 145A8 | 12 | 25/40 FR | 5235/2375 | 5445/2470 | 5655/2565 | 5865/2660 | 6075/2755 | 6285/2850 |
| | DR 133A8 | | 25/40 DR | 3760/1705 | 3900/1770 | 4045/1835 | 4190/1900 | 4330/1965 | 4475/2030 |

FR = Free Rolling / DR = Drive Axle



MS965
Continued

LOAD AND INFLATION

| Standard Size | LI / SS | PR | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | |
|------------------|----------|----|-------------------------|---|-----------|-----------|-----------|-----------|-----------|
| | | | | 46 psi | 49 psi | 52 psi | 55 psi | 58 psi | 65 psi |
| | | | | 3.2 bar | 3.4 bar | 3.6 bar | 3.8 bar | 4 bar | 4.5 bar |
| 10.0/80-12 | FR 121A8 | 10 | 25/40 FR | 2400/1090 | 2620/1190 | 2840/1290 | 3020/1370 | 3200/1450 | |
| | DR 109A8 | | 25/40 DR | 1720/780 | 1870/850 | 2050/930 | 2160/980 | 2270/1030 | |
| 10.0/75-15.3 IMP | FR 123A8 | 10 | 25/40 FR | 3055/1385 | 3155/1430 | 3265/1480 | 3360/1525 | 3415/1550 | |
| | DR 111A8 | | 25/40 DR | 2140/970 | 2215/1005 | 2295/1040 | 2370/1075 | 2405/1090 | |
| 11.5/80-15.3 | FR 131A8 | 10 | 25/40 FR | 4100/1860 | 4300/1950 | | | | |
| | DR 119A8 | | 25/40 DR | 2880/1310 | 3000/1360 | | | | |
| 12.5/80-15.3 | FR 142A8 | 14 | 25/40 FR | 4670/2120 | 4940/2240 | 5200/2360 | 5450/2470 | 5690/2580 | 5840/2650 |
| | DR 129A8 | | 25/40 DR | 3310/1500 | 3530/1600 | 3750/1700 | 3880/1760 | 3970/1800 | 4080/1850 |
| 15.0/55-17 IMP | FR 141A8 | 14 | 25/40 FR | 5105/2315 | 5245/2380 | 5390/2445 | 5535/2510 | 5675/2575 | |
| | DR 128A8 | | 25/40 DR | 3595/1630 | 3680/1670 | 3780/1715 | 3870/1755 | 3970/1800 | |
| 19.0/45-17 IMP | FR 144A8 | 14 | 25/40 FR | | | | | | |
| | DR 131A8 | | 25/40 DR | | | | | | |
| 500/50-17 IMP | FR 149A8 | 14 | 25/40 FR | | | | | | |
| | DR 137A8 | | 25/40 DR | | | | | | |
| 13.0/65-18 IMP | FR 144A8 | 16 | 25/40 FR | 4830/2190 | | 5150/2335 | | 5465/2480 | 5775/2620 |
| | DR 131A8 | | 25/40 DR | 3405/1545 | | 3615/1640 | | 3825/1735 | 4035/1830 |
| 15.0/70-18 IMP | FR 145A8 | 12 | 25/40 FR | 6395/2900 | | | | | |
| | DR 133A8 | | 25/40 DR | 4540/2060 | | | | | |

FR = Free Rolling / DR = Drive Axle

MAXAM MS966

BIAS PLY IMPLEMENT TIRE I1

Traction implement I3 pattern for high-flotation and traction.

- ▶ Extra wide tread design provides maximum flotation
- ▶ Deep undertread and reinforced shoulder for improved stubble resistance
- ▶ Special cut resistant compound improves wear and reduces chunking
- ▶ Deep tread for long tread life



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | Alt Size | PR | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | R.C.I. S.R.I. | Tread Depth 32nds mm | Weight lbs kg | 75% of Int. Vol. gal l |
|-------------|------------------|-----------------|----|----------------------|------|------------|--------------|------|-----|------|------|--------|-----|-------|------|------------------|----------------------------|---------------------|---------------------------------|
| | | | | | | | | in | mm | in | mm | in | mm | in | mm | | | | |
| 65012 | 11.5/80-15.3 IMP | 300/80-15.3 IMP | 12 | FR 135A8 DR 122A8 | TL | 9.0 | | 11.6 | 295 | 34 | 864 | 15.4 | 392 | 101.7 | 2583 | 31 410 | 29 23 | 63 29 | 16.6 63 |
| 65013 | 15.0/55-17 IMP | 380/55-17 IMP | 14 | FR 141A8 DR 128A8 | TL | 13.0 | | 15.2 | 387 | 35.2 | 894 | 16.1 | 408 | 105.9 | 2690 | 32 410 | 28 22 | 73 33 | 23 87 |
| 65014 | 19.0/45-17 IMP | 480/45-17 IMP | 14 | FR 144A8 DR 131A8 | TL | 16.0 | | 18.5 | 469 | 34.1 | 865 | 15.6 | 396 | 102.8 | 2610 | 32 410 | 31 25 | 90 41 | 25.1 95 |
| N/A | 12.5/80-18 IMP | 340/80-18 IMP | 12 | FR 142A8 DR 129A8 | TL | 9.0 | 11.0 | 12.4 | 316 | 39 | 991 | 17.7 | 450 | 116.9 | 2970 | 34 475 | 35 28 | 92 42 | 23.2 88 |
| 65015 | 12.5/80-18 IMP | 340/80-18 IMP | 14 | FR 145A8 DR 132A8 | TL | 9.0 | 11.0 | 12.4 | 316 | 39 | 991 | 17.7 | 450 | 116.9 | 2970 | 34 475 | 35 28 | 92 42 | 23.2 88 |
| 65033 | 16.5L-16.1 IMP | - | 10 | FR 138B DR 138B | TL | 14.0 | - | 17.1 | 434 | 41.5 | 1054 | 18 | 458 | 119 | 3022 | 34 475 | 26 21 | 96 43 | 42.2 160 |
| 65034 | 21.5L-16.1 IMP | - | 14 | FR 152B DR 152B | TL | 18.0 | - | 21.6 | 549 | 43.4 | 1102 | 19.6 | 499 | 129.8 | 3296 | 36 525 | 36 25 | 141 64 | 59.3 225 |

FR = Free Rolling / DR = Drive Axle



MS966 LOAD AND INFLATION

| Standard Size | LI / SS | PR | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | |
|---------------------------------------|----------------------|----|-------------------------|---|-----------|-----------|-----------|-----------|-----------|-----------|
| | | | | 29 psi | 32 psi | 35 psi | 38 psi | 41 psi | 44 psi | 46 psi |
| | | | | 2 bar | 2.2 bar | 2.4 bar | 2.6 bar | 2.8 bar | 3 bar | 3.2 bar |
| 11.5/80-15.3 IMP (300/80-15.3 IMP) | FR 135A8 DR 122A8 | 12 | 25/40 FR | 3240/1470 | 3385/1535 | 3525/1600 | 3670/1665 | 3825/1735 | 3970/1800 | 4110/1865 |
| | | | 25/40 DR | 2260/1025 | 2360/1070 | 2460/1115 | 2555/1160 | 2645/1200 | 2745/1245 | 2845/1290 |
| 15.0/55-17 IMP (380/55-17 IMP) | FR 141A8 DR 128A8 | 14 | 25/40 FR | 4245/1925 | 4385/1990 | 4530/2055 | 4675/2120 | 4815/2185 | 4960/2250 | 5105/2315 |
| | | | 25/40 DR | 3020/1370 | 3120/1415 | 3210/1455 | 3305/1500 | 3405/1545 | 3495/1585 | 3595/1630 |
| 19.0/45-17 IMP (480/45-17 IMP) | FR 144A8 DR 131A8 | 14 | 25/40 FR | 4760/2160 | 5115/2320 | 5465/2480 | 5820/2640 | 6175/2800 | | |
| | | | 25/40 DR | 3340/1515 | 3585/1625 | 3815/1730 | 4055/1840 | 4300/1950 | | |
| 12.5/80-18 IMP (340/80-18 IMP) | FR 142A8 DR 129A8 | 12 | 25/40 FR | 4275/1940 | 4465/2025 | 4650/2110 | 4830/2190 | 5015/2275 | 5205/2360 | 5380/2440 |
| | | | 25/40 DR | 3140/1425 | 3250/1475 | 3360/1525 | 3470/1575 | 3585/1625 | 3695/1675 | 3805/1725 |
| 12.5/80-18 IMP (340/80-18 IMP) | FR 145A8 DR 132A8 | 14 | 25/40 FR | 4275/1940 | 4465/2025 | 4650/2110 | 4830/2190 | 5015/2275 | 5205/2360 | 5380/2440 |
| | | | 25/40 DR | 3140/1425 | 3250/1475 | 3360/1525 | 3470/1575 | 3585/1625 | 3695/1675 | 3805/1725 |
| 16.5L-16.1 IMP | FR 138B DR 138B | 10 | 30/50 FR | 4460/2020 | 4830/2190 | 5200/2360 | | | | |
| | | | 30/50 DR | 4460/2020 | 4830/2190 | 5200/2360 | | | | |
| 21.5L-16.1 IMP | FR 152B DR 152B | 14 | 30/50 FR | 7040/3195 | 7440/3370 | 7850/3550 | | | | |
| | | | 30/50 DR | 7040/3195 | 7440/3370 | 7850/3550 | | | | |

| Standard Size | LI / SS | PR | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | |
|---------------------------------------|----------------------|----|-------------------------|---|-----------|-----------|-----------|-----------|-----------|
| | | | | 49 psi | 52 psi | 55 psi | 58 psi | 61 psi | 62 psi |
| | | | | 3.4 bar | 3.6 bar | 3.8 bar | 4 bar | 4.2 bar | 4.3 bar |
| 11.5/80-15.3 IMP (300/80-15.3 IMP) | FR 135A8 DR 122A8 | 12 | 25/40 FR | 4255/1930 | 4410/2000 | 4555/2065 | 4695/2130 | 4805/2180 | |
| | | | 25/40 DR | 2945/1335 | 3040/1380 | 3140/1425 | 3230/1465 | 3305/1500 | |
| 15.0/55-17 IMP (380/55-17 IMP) | FR 141A8 DR 128A8 | 14 | 25/40 FR | 5245/2380 | 5390/2445 | 5535/2510 | 5675/2575 | | |
| | | | 25/40 DR | 3680/1670 | 3780/1715 | 3870/1755 | 3970/1800 | | |
| 19.0/45-17 IMP (480/45-17 IMP) | FR 144A8 DR 131A8 | 14 | 25/40 FR | | | | | | |
| | | | 25/40 DR | | | | | | |
| 12.5/80-18 IMP (340/80-18 IMP) | FR 142A8 DR 129A8 | 12 | 5565/2525 | 5755/2610 | 5840/2650 | | | | |
| | | | 3915/1775 | 4025/1825 | 4080/1850 | | | | |
| 12.5/80-18 IMP (340/80-18 IMP) | FR 145A8 DR 132A8 | 14 | 25/40 FR | 5565/2525 | 5755/2610 | 5930/2690 | 6120/2775 | 6305/2860 | 6395/2900 |
| | | | 25/40 DR | 3915/1775 | 4025/1825 | 4135/1875 | 4245/1925 | 4355/1975 | 4410/2000 |

FR = Free Rolling / DR = Drive Axle

MAXAM MS909R

AGRO-INDUSTRIAL RADIAL TIRE R4

Radial industrial tires designed for high traction in agricultural applications. Belt stabilized tread provides excellent stability and resistance to punctures and field hazards.

- ▶ Open center design for soft soil traction
- ▶ Reinforced lug centerline for hard surface grip and stability
- ▶ Self-cleaning lug design
- ▶ Steel belts provide wide, flat footprint and protect from punctures
- ▶ Excellent lateral stability, ideal for telehandler applications



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | Imperial Size | LI / SS | Type | Rim (Rec.) | Rim (Alter.) | S.W. | | O.D. | | S.L.R. | | R.C. | | Tread Depth 32nds mm | Weight lbs kg |
|-------------|---------------|---------------|---------|------|------------|--------------------|------|-----|------|------|--------|-----|-------|------|----------------------|---------------|
| | | | | | | | in | mm | in | mm | in | mm | in | mm | | |
| 90210 | 400/70R24 IND | 16/70R24 | 152A8/B | TL | 13 | 13SDC, DW13, DW13L | 16.1 | 407 | 46.1 | 1172 | 20.7 | 527 | 137.5 | 3492 | 40 32 | 170 77 |
| 951139 | 460/70R24 IND | 17.5LR24 | 159A8/B | TL | DW15L | DW14L, DW16L | 18.3 | 465 | 49.4 | 1254 | 23.4 | 593 | 149.6 | 3800 | 45 36 | 216 98 |
| 951140 | 500/70R24 IND | 19.5LR24 | 164A8/B | TL | DW16L | DW15L, DW18L | 19.8 | 503 | 51.6 | 1310 | 24.3 | 617 | 156.3 | 3969 | 49 39 | 247 112 |



MS909R LOAD AND INFLATION

| Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | |
|--------------------------|---------|-------------------------|---|------------|------------|------------|-------------|-------------|-------------|
| | | | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi | 64 psi |
| | | | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar | 4.4 bar |
| 400/70R24 IND (16/70R24) | 152A8/B | Static | 8470/3840 | 10020/4545 | 11590/5255 | 13140/5960 | 14700/6670 | 16360/7420 | 18000/8165 |
| | | 6 mph/10 km/h cyclic | 5510/2500 | 6540/2965 | 7550/3425 | 8580/3890 | 9590/4350 | 10670/4840 | |
| | | 25/40 & 30/50 | 4320/1960 | 5020/2275 | 5710/2590 | 6390/2900 | 7110/3225 | 7830/3550 | |
| 460/70R24 (17.5LR24) | 159A8/B | Static | 12740/5780 | 14740/6685 | 16680/7565 | 18570/8420 | 20400/9250 | 22190/10065 | 23950/10860 |
| | | 6 mph/10 km/h cyclic | 8310/3770 | 9610/4360 | 10880/4935 | 12110/5490 | 13300/6030 | 14480/6565 | |
| | | 25/40 & 30/50 | 5550/2515 | 6410/2905 | 7250/3290 | 8070/3660 | 8860/4020 | 9650/4375 | |
| 500/70R24 (19.5LR24) | 164A8/B | Static | 14560/6605 | 16850/7640 | 19060/8645 | 21210/9620 | 23310/10570 | 25360/11500 | 27360/12410 |
| | | 6 mph/10 km/h cyclic | 9500/4310 | 10990/4985 | 12440/5640 | 13840/6275 | 15200/6895 | 16540/7500 | |
| | | 25/40 & 30/50 | 6330/2870 | 7330/3325 | 8290/3760 | 9230/4185 | 10130/4595 | 11030/5000 | |

MAXAM MS910R

MULTI-PURPOSE RADIAL TIRE MPT R4

All-steel-radial construction and agricultural tires designed with versatile lug pattern where traction is required. Unique self-cleaning design with dome mud breakers prevents terrain built up and provides maximum grip and performance.

- ▶ IND sizes for telehandler service
- ▶ Versatile non-directional tread design
- ▶ All steel radial construction for maximum durability, stability, traction & comfort
- ▶ Special self-cleaning design with dome mud breakers



TIRE TECHNICAL SPECIFICATIONS & APPLICATIONS



| Item Number | Size | LI / SS | Type | Rim (Rec.) | S.W. | | O.D. | | S.L.R. | | R.C. | | Tread Depth | | Weight | |
|----------------------------------|---------------|---------|------|------------|------|-----|------|------|--------|-----|-------|------|-------------|----|--------|-----|
| | | | | | in | mm | in | mm | in | mm | in | mm | 32nds | mm | lbs | kg |
| MULTIPURPOSE RADIAL | | | | | | | | | | | | | | | | |
| 90300 | 335/80R18 MPT | 132K | TL | 11.00 | 13.1 | 334 | 38.9 | 989 | 17.4 | 442 | 117.3 | 2979 | 23 | 19 | 115 | 52 |
| 90200 | 335/80R20 MPT | 149K | TL | 11.00 | 13.1 | 334 | 41 | 1041 | 18.3 | 465 | 122.4 | 3109 | 23 | 19 | 126 | 57 |
| CONSTRUCTION APPLICATIONS | | | | | | | | | | | | | | | | |
| 90300 | 335/80R18 EM | 145A2 | TL | 11.00 | 13.1 | 334 | 38.9 | 989 | 17.4 | 442 | 117.3 | 2979 | 23 | 19 | 115 | 52 |
| 90304 | 365/70R18 EM | 146A2 | TL | 11.00 | 14.3 | 363 | 38 | 966 | 17 | 432 | 114.8 | 2915 | 26 | 21 | 121 | 55 |
| 90305 | 405/70R18 EM | 153A2 | TL | 13.00 | 15.9 | 405 | 40.3 | 1023 | 18.3 | 465 | 121 | 3073 | 26 | 21 | 143 | 65 |
| 90200 | 335/80R20 EM | 147A2 | TL | 11.00 | 13.1 | 334 | 41 | 1041 | 18.3 | 465 | 122.4 | 3109 | 23 | 19 | 126 | 57 |
| 90202 | 365/80R20 EM | 153A2 | TL | 11.00 | 14.3 | 363 | 42.9 | 1089 | 19.1 | 485 | 129 | 3277 | 23 | 19 | 146 | 66 |
| 90204 | 405/70R20 EM | 155A2 | TL | 13.00 | 16.1 | 409 | 42.4 | 1076 | 18.9 | 479 | 128.2 | 3256 | 26 | 21 | 159 | 72 |
| 90206 | 405/70R24 EM | 158A2 | TL | 13.00 | 16.1 | 409 | 46.5 | 1181 | 21.2 | 538 | 139.6 | 3545 | 26 | 21 | 181 | 82 |
| INDUSTRIAL APPLICATIONS | | | | | | | | | | | | | | | | |
| 90302 | 340/80R18 IND | 143A8/B | TL | 11.00 | 13.2 | 334 | 38.9 | 989 | 18.3 | 466 | 117.9 | 2995 | 23 | 19 | 116 | 53 |
| 90307 | 400/70R18 IND | 147A8/B | TL | 13.00 | 15.8 | 401 | 40.3 | 1023 | 18.9 | 481 | 122.1 | 3100 | 26 | 21 | 146 | 66 |
| 90310 | 460/70R24 IND | 159A8/B | TL | 14.00 | 18.1 | 460 | 49.2 | 1249 | 23.2 | 590 | 149 | 3785 | 30 | 24 | 238 | 108 |



MS910R LOAD AND INFLATION

| Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | | | |
|----------------------------|---------|-------------------------|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | | | 36 psi | 44 psi | 51 psi | 58 psi | 65 psi | 73 psi | 80 psi | 87 psi | 94 psi |
| | | | 2.5 bar | 3 bar | 3.5 bar | 4 bar | 4.5 bar | 5 bar | 5.5 bar | 6.0 bar | 6.5 bar |
| MULTIPURPOSE RADIAL | | | | | | | | | | | |
| 335/80R18 MPT | 132K | 25 mph/40 km/h | 2450/1110 | 2800/1270 | 3110/1410 | 3480/1580 | 3780/1715 | 4105/1860 | 4420/2005 | 4740/2150 | 5060/2295 |
| | | 56 mph/90 km/h | 2175/985 | 2480/1125 | 2760/1250 | 3090/1400 | 3360/1525 | 3645/1650 | 3920/1780 | 4205/1905 | 4490/2035 |
| | | 68mph/110 km/h | 2130/970 | 2435/1105 | 2705/1230 | 3030/1375 | 3290/1490 | 3570/1620 | 3845/1745 | 4125/1870 | 4400/2000 |
| 335/80R20 MPT | 149K | 25 mph/40 km/h | 3990/1810 | 4560/2070 | 5070/2300 | 5680/2575 | 6160/2795 | 6680/3030 | 7200/3265 | 7720/3500 | 8245/3740 |
| | | 56 mph/90 km/h | 3540/1605 | 4045/1835 | 4500/2040 | 5040/2285 | 5470/2480 | 5930/2690 | 6380/2895 | 6845/3105 | 7310/3315 |
| | | 68mph/110 km/h | 3470/1575 | 3970/1800 | 4410/2000 | 4940/2240 | 5360/2430 | 5810/2635 | 6260/2840 | 6715/3045 | 7165/3250 |

MAXAM MS910R

MULTI-PURPOSE RADIAL TIRE MPT R4

All-steel-radial construction and agricultural tires designed with versatile lug pattern where traction is required. Unique self-cleaning design with dome mud breakers prevents terrain built up and provides maximum grip and performance.

- ▶ IND sizes for telehandler service
- ▶ Versatile non-directional tread design
- ▶ All steel radial construction for maximum durability, stability, traction & comfort
- ▶ Special self-cleaning design with dome mud breakers



MS910R LOAD AND INFLATION

| Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | | |
|--------------------------------|---------|-------------------------|---|------------|------------|------------|------------|-------------|-------------|
| | | | 29 psi | 35 psi | 41 psi | 46 psi | 52 psi | 58 psi | 64 psi |
| | | | 2 bar | 2.4 bar | 2.8 bar | 3.2 bar | 3.6 bar | 4 bar | 4.4 bar |
| INDUSTRIAL APPLICATIONS | | | | | | | | | |
| 340/80R18 IND | 143A8/B | Static | 7940/3600 | 9180/4165 | 10390/4710 | 11570/5245 | 12700/5760 | 13830/6270 | 14920/6765 |
| | | 6 mph/10 km/h cyclic | 5180/2350 | 5990/2715 | 6780/3075 | 7540/3420 | 8290/3760 | 9020/4090 | |
| | | 30mph/50 km/h | 3450/1565 | 3990/1810 | 4520/2050 | 5030/2280 | 5520/2505 | 6010/2725 | |
| 400/70R18 IND | 147A8/B | Static | 8950/4060 | 10360/4700 | 11720/5315 | 13040/5915 | 14330/6500 | 15600/7075 | 16840/7635 |
| | | 6 mph/10 km/h cyclic | 5840/2650 | 6760/3065 | 7650/3470 | 8510/3860 | 9350/4240 | 10180/4615 | |
| | | 30mph/50 km/h | 3890/1765 | 4510/2045 | 5090/2310 | 5670/2570 | 6230/2825 | 6780/3075 | |
| 460/70R24 IND | 159A8/B | Static | 12740/5780 | 14740/6685 | 16680/7565 | 18570/8420 | 20400/9250 | 22190/10065 | 23950/10860 |
| | | 6 mph/10 km/h cyclic | 8310/3770 | 9610/4360 | 10880/4935 | 12110/5490 | 13300/6030 | 14480/6565 | |
| | | 30mph/50 km/h | 5550/2515 | 6410/2905 | 7250/3290 | 8070/3660 | 8860/4020 | 9650/4375 | |



MS910R **LOAD AND INFLATION**
Continued

| Standard Size | LI / SS | Service Speed (mph/kph) | TIRE LOAD LIMITS AT VARIOUS COLD INFLATION PRESSURES (lbs/kg) | | | | | |
|----------------------------------|---------|-------------------------|---|-----------|------------|------------|------------|------------|
| | | | 22 psi | 29 psi | 36 psi | 44 psi | 51 psi | 54 psi |
| | | | 1.5 bar | 2 bar | 2.5 bar | 3 bar | 3.5 bar | 3.75 bar |
| CONSTRUCTION APPLICATIONS | | | | | | | | |
| 335/80R18 EM | 145A2 | Static | 4940/2240 | 6170/2800 | 7410/3360 | 8555/3880 | 9700/4400 | 10230/4640 |
| | | 6 mph/10 km/h | 3090/1400 | 3860/1750 | 4630/2100 | 5345/2425 | 6060/2750 | 6390/2900 |
| | | 30mph/50 km/h | 2260/1025 | 2810/1275 | 3360/1525 | 3910/1775 | 4410/2000 | 4685/2125 |
| 365/70R18 EM | 146A2 | Static | 5115/2320 | 6440/2920 | 7670/3480 | 8820/4000 | 10050/4560 | 10580/4800 |
| | | 6 mph/10 km/h cyclic | 3200/1450 | 4020/1825 | 4800/2175 | 5510/2500 | 6280/2850 | 6610/3000 |
| | | 30mph/50 km/h | 2315/1050 | 2920/1325 | 3470/1575 | 4020/1825 | 4575/2075 | 4800/2180 |
| 405/70R18 EM | 153A2 | Static | 6170/2800 | 7760/3520 | 9350/4240 | 10760/4880 | 12170/5520 | 12875/5840 |
| | | 6 mph/10 km/h cyclic | 3860/1750 | 4850/2200 | 5840/2650 | 6725/3050 | 7600/3450 | 8050/3650 |
| | | 30mph/50 km/h | 2700/1225 | 3420/1550 | 4080/1850 | 4740/2150 | 5350/2425 | 5680/2575 |
| 335/80R20 EM | 147A2 | Static | 5200/2360 | 5630/2960 | 7850/3560 | 9080/4120 | 10230/4640 | 10850/4920 |
| | | 6 mph/10 km/h cyclic | 3250/1475 | 4080/1850 | 4905/2225 | 5680/2575 | 6390/2900 | 6800/3075 |
| | | 30mph/50 km/h | 2370/1075 | 2980/1350 | 3580/1625 | 4130/1875 | 4685/2125 | 4940/2240 |
| 365/80R20 EM | 153A2 | Static | 6170/2800 | 7760/3520 | 9350/4240 | 10760/4880 | 12170/5520 | 12875/5840 |
| | | 6 mph/10 km/h cyclic | 3860/1750 | 4850/2200 | 5840/2650 | 6720/3050 | 7605/3450 | 8050/3650 |
| | | 30mph/50 km/h | 2700/1225 | 3420/1550 | 4080/1850 | 4740/2150 | 5350/2425 | 5680/2575 |
| 405/70R20 EM | 155A2 | Static | 6530/2960 | 8290/3760 | 9880/4480 | 11460/5200 | 12960/5880 | 13670/6200 |
| | | 6 mph/10 km/h cyclic | 4080/1850 | 5180/2350 | 6170/2800 | 7160/3250 | 8100/3675 | 8540/3875 |
| | | 30mph/50 km/h | 2870/1300 | 3640/1650 | 4350/1975 | 5020/2275 | 5680/2575 | 6000/2725 |
| 405/70R24 EM | 158A2 | Static | 7230/3280 | 9080/4120 | 10850/4920 | 12520/5680 | 14200/6440 | 14990/6800 |
| | | 6 mph/10 km/h cyclic | 4520/2050 | 5680/2575 | 6780/3075 | 7830/3550 | 8870/4025 | 9370/4250 |
| | | 30mph/50 km/h | 3200/1450 | 4025/1825 | 4795/2175 | 5510/2500 | 6280/2850 | 6610/3000 |

CONVERSION CHART

| | |
|--------------|----------------------|
| 1 Centimeter | cm = 0.3937 inch |
| 1 Inch | in = 2.5 cm or 25 mm |
| 1 Meter | m = 3.281 feet |
| 1 Foot | ft = 0.3048 m |
| 1 Kilometer | km = 0.6214 mi |

| | |
|-------------|-------------------------|
| 1 Mile | mi = 1.6093 km |
| 1 Liter | l = 0.264 US Gallon |
| 1 US Gallon | gal = 3.785 Liters |
| 1 Kilogram | kg = 2.205 Pounds |
| 1 Kilogram | kg = 1 da N (de newton) |

| | |
|---------|---------------------------------------|
| 1 Pound | lb = 0.436 kg |
| 1 Bar | = 14.484 psi (pounds per square inch) |
| 1 Bar | = 100 Kpa (kilo pascal) |

INTERNATIONAL TIRE LOAD INDEX IN KILOGRAMS (KG) & POUNDS (LBS)

| li | kg | lbs | li | kg | lbs | li | kg | lbs | li | kg | lbs |
|-----|------|------|-----|------|-------|-----|-------|-------|-----|--------|--------|
| 90 | 600 | 1320 | 135 | 2180 | 4800 | 180 | 8000 | 17600 | 225 | 29000 | 64000 |
| 91 | 615 | 1360 | 136 | 2240 | 4940 | 181 | 8250 | 18200 | 226 | 30000 | 66000 |
| 92 | 630 | 1390 | 137 | 2300 | 5080 | 182 | 8500 | 18700 | 227 | 30750 | 68000 |
| 93 | 650 | 1430 | 138 | 2360 | 5200 | 183 | 8750 | 19300 | 228 | 31500 | 69500 |
| 94 | 670 | 1480 | 139 | 2430 | 5360 | 184 | 9000 | 19800 | 229 | 32500 | 71500 |
| 95 | 690 | 1520 | 140 | 2500 | 5520 | 185 | 9250 | 20400 | 230 | 33500 | 74000 |
| 96 | 710 | 1570 | 141 | 2575 | 5680 | 186 | 9500 | 20900 | 231 | 34500 | 76000 |
| 97 | 730 | 1610 | 142 | 2650 | 5840 | 187 | 9750 | 21500 | 232 | 35500 | 78500 |
| 98 | 750 | 1650 | 143 | 2725 | 6000 | 188 | 10000 | 22000 | 233 | 36500 | 80500 |
| 99 | 775 | 1710 | 144 | 2800 | 6150 | 189 | 10300 | 22700 | 234 | 37500 | 82500 |
| 100 | 800 | 1760 | 145 | 2900 | 6400 | 190 | 10600 | 23400 | 235 | 38750 | 85500 |
| 101 | 825 | 1820 | 146 | 3000 | 6600 | 191 | 10900 | 24000 | 236 | 40000 | 88000 |
| 102 | 850 | 1870 | 147 | 3075 | 6800 | 192 | 11200 | 24700 | 237 | 41250 | 91000 |
| 103 | 875 | 1930 | 148 | 3150 | 6950 | 193 | 11500 | 25400 | 238 | 42500 | 93500 |
| 104 | 900 | 1980 | 149 | 3250 | 7150 | 194 | 11800 | 26000 | 239 | 43750 | 96500 |
| 105 | 925 | 2040 | 150 | 3350 | 7400 | 195 | 12150 | 26800 | 240 | 45000 | 99000 |
| 106 | 950 | 2090 | 151 | 3450 | 7600 | 196 | 12500 | 27600 | 241 | 46250 | 102000 |
| 107 | 975 | 2150 | 152 | 3550 | 7850 | 197 | 12850 | 28300 | 242 | 47500 | 104500 |
| 108 | 1000 | 2200 | 153 | 3650 | 8050 | 198 | 13200 | 29100 | 243 | 48750 | 107500 |
| 109 | 1030 | 2270 | 154 | 3750 | 8250 | 199 | 13600 | 30000 | 244 | 50000 | 110000 |
| 110 | 1060 | 2340 | 155 | 3875 | 8550 | 200 | 14000 | 30900 | 245 | 51500 | 113500 |
| 111 | 1090 | 2400 | 156 | 4000 | 8800 | 201 | 14500 | 32000 | 246 | 53000 | 117000 |
| 112 | 1120 | 2470 | 157 | 4125 | 9100 | 202 | 15000 | 33100 | 247 | 54500 | 120000 |
| 113 | 1150 | 2540 | 158 | 4250 | 9350 | 203 | 15500 | 34200 | 248 | 56000 | 123500 |
| 114 | 1180 | 2600 | 159 | 4375 | 9650 | 204 | 16000 | 35300 | 249 | 58000 | 128000 |
| 115 | 1215 | 2680 | 160 | 4500 | 9900 | 205 | 16500 | 36400 | 250 | 60000 | 132500 |
| 116 | 1250 | 2760 | 161 | 4625 | 10200 | 206 | 17000 | 37500 | 251 | 61500 | 135500 |
| 117 | 1285 | 2830 | 162 | 4750 | 10500 | 207 | 17500 | 38600 | 252 | 63000 | 139000 |
| 118 | 1320 | 2910 | 163 | 4875 | 10700 | 208 | 18000 | 39700 | 253 | 65000 | 143500 |
| 119 | 1360 | 3000 | 164 | 5000 | 11000 | 209 | 18500 | 40800 | 254 | 67000 | 147500 |
| 120 | 1400 | 3080 | 165 | 5150 | 11400 | 210 | 19000 | 41900 | 255 | 69000 | 152000 |
| 121 | 1450 | 3200 | 166 | 5300 | 11700 | 211 | 19500 | 43000 | 256 | 71000 | 156500 |
| 122 | 1500 | 3300 | 167 | 5450 | 12000 | 212 | 20000 | 44100 | 257 | 73000 | 161000 |
| 123 | 1550 | 3420 | 168 | 5600 | 12300 | 213 | 20600 | 45400 | 258 | 75000 | 165500 |
| 124 | 1600 | 3520 | 169 | 5800 | 12800 | 214 | 21200 | 46700 | 259 | 77500 | 171000 |
| 125 | 1650 | 3640 | 170 | 6000 | 13200 | 215 | 21800 | 48100 | 260 | 80000 | 176500 |
| 126 | 1700 | 3740 | 171 | 6150 | 13600 | 216 | 22400 | 49400 | 261 | 82500 | 182000 |
| 127 | 1750 | 3860 | 172 | 6300 | 13900 | 217 | 23000 | 50700 | 262 | 85000 | 187500 |
| 128 | 1800 | 3960 | 173 | 6500 | 14300 | 218 | 23600 | 52000 | 263 | 87500 | 193000 |
| 129 | 1850 | 4080 | 174 | 6700 | 14800 | 219 | 24300 | 53600 | 264 | 90000 | 198500 |
| 130 | 1900 | 4180 | 175 | 6900 | 15200 | 220 | 25000 | 55100 | 265 | 92500 | 204000 |
| 131 | 1950 | 4300 | 176 | 7100 | 15700 | 221 | 25750 | 56800 | 266 | 95000 | 209500 |
| 132 | 2000 | 4400 | 177 | 7300 | 16100 | 222 | 26500 | 58400 | 267 | 97500 | 215000 |
| 133 | 2060 | 4540 | 178 | 7500 | 16500 | 223 | 27250 | 60000 | 268 | 100000 | 220500 |
| 134 | 2120 | 4680 | 179 | 7750 | 17100 | 224 | 28000 | 61500 | 269 | 103000 | 227000 |

MAXAM AIR PRESSURE CONVERSION TABLE

| psi | Kpa | Bar | psi | Kpa | Bar |
|-----|-----|-----|-----|-----|-----|
| 8 | 55 | 0.6 | 45 | 310 | 3.1 |
| 9 | 62 | 0.6 | 46 | 317 | 3.2 |
| 10 | 69 | 0.7 | 47 | 324 | 3.2 |
| 11 | 76 | 0.8 | 48 | 331 | 3.3 |
| 12 | 83 | 0.8 | 49 | 338 | 3.4 |
| 13 | 90 | 0.9 | 50 | 345 | 3.4 |
| 14 | 96 | 1.0 | 51 | 352 | 3.5 |
| 15 | 103 | 1.0 | 52 | 358 | 3.6 |
| 16 | 110 | 1.1 | 53 | 365 | 3.7 |
| 17 | 117 | 1.2 | 54 | 372 | 3.7 |
| 18 | 124 | 1.2 | 55 | 379 | 3.8 |
| 19 | 131 | 1.3 | 56 | 386 | 3.9 |
| 20 | 138 | 1.4 | 57 | 393 | 3.9 |
| 21 | 145 | 1.4 | 58 | 400 | 4.0 |
| 22 | 152 | 1.5 | 59 | 407 | 4.1 |
| 23 | 159 | 1.6 | 60 | 414 | 4.1 |
| 24 | 165 | 1.7 | 61 | 420 | 4.2 |
| 25 | 172 | 1.7 | 62 | 427 | 4.3 |
| 26 | 179 | 1.8 | 63 | 434 | 4.3 |
| 27 | 186 | 1.9 | 64 | 441 | 4.4 |
| 28 | 193 | 1.9 | 65 | 448 | 4.5 |
| 29 | 200 | 2.0 | 66 | 455 | 4.6 |
| 30 | 207 | 2.1 | 67 | 462 | 4.6 |
| 31 | 214 | 2.1 | 68 | 469 | 4.7 |
| 32 | 221 | 2.2 | 69 | 476 | 4.8 |
| 33 | 227 | 2.3 | 70 | 482 | 4.8 |
| 34 | 234 | 2.3 | 71 | 489 | 4.9 |
| 35 | 241 | 2.4 | 72 | 496 | 5.0 |
| 36 | 248 | 2.5 | 73 | 503 | 5.0 |
| 37 | 255 | 2.6 | 74 | 510 | 5.1 |
| 38 | 262 | 2.6 | 75 | 517 | 5.2 |
| 39 | 269 | 2.7 | 76 | 524 | 5.2 |
| 40 | 276 | 2.8 | 77 | 531 | 5.3 |
| 41 | 283 | 2.8 | 78 | 538 | 5.4 |
| 42 | 289 | 2.9 | 79 | 545 | 5.4 |
| 43 | 296 | 3.0 | 80 | 551 | 5.5 |
| 44 | 303 | 3.0 | | | |

SPEED CATEGORY

| Speed Symbol | km/h | MPH |
|--------------|------|------|
| A1 | 5 | 2.5 |
| A2 | 10 | 5 |
| A3 | 15 | 10 |
| A4 | 20 | 12.5 |
| A5 | 25 | 15 |
| A6 | 30 | 20 |
| A7 | 35 | 22.5 |
| A8 | 40 | 25 |
| B | 50 | 30 |
| C | 60 | 35 |
| D | 65 | 40 |
| E | 70 | 43 |
| F | 80 | 50 |
| G | 90 | 55 |
| J | 100 | 62 |
| K | 110 | 68 |
| L | 120 | 75 |

MAXAM AG TIRE SIZES & DIAMETER CONVERSION TABLE

| SRI | RCI | Rim Diameter (inches) | Tire OD Approximate (inches) | Tire Size (inches) | AgriXtra 85 | AgriXtra 70 | AgriXtra 65 | AgriXtra XL Wide Traction | AgriXtra N Narrow / High Load | AgriXtra H Super Wide Flotation | FlotXtra Tanker Implement Flotation | AgilXtra Tanker Implement Flotation | MS909R Agro-Industrial R4 | MS910R MPT (EM & IND) | TracXtra |
|------|-----|---------------------------------|------------------------------|--|--|------------------------|--------------------------|---|---|--------------------------------------|---|---|---------------------------|-------------------------|-----------|
| 350 | 29 | 16" | 31" | 6.5R16 | | 260/70R16 | | | | | | | | | |
| 375 | 30 | 16" | 32" | 7.5R16 | | 280/70R16 | | | | | | | | | |
| 400 | 32 | 18" | 33" | 7.5R18 | | 280/70R18 | | | | | | | | | |
| 425 | 32 | 20" | 35" | 7.5R20 | | 260/70R20 280/70R20 | | | | | | | | | |
| 450 | 33 | 20" | 38" | 9.5R20 | | 300/70R20 | | | | | | | | | |
| 500 | 35 | 20" 24" | 41" | 9.5R24 | 250/85R24 | | | | | | | | | 335/80R20 | |
| 525 | 36 | 22.5" 24" | 43" | 11.2R24 | 280/85R24 | | | | | | 560/45R22.5 710/35R22.5 | 560/45R22.5 | | 405/70R20 | |
| 550 | 37 | 22.5" 24" | 45" | 12.4R24 | 320/85R24 | 360/70R24 | | | | | 500/60R22.5 600/50R22.5 710/40R22.5 | 500/60R22.5 | 400/70R24 | 405/70R24 | |
| 575 | 37 | 22.5" 24" 28" | 47" | 13.6R24 | 340/85R24 280/85R28 | 380/70R24 | 440/65R24 | | | | | 710/45R22.5 | | | |
| 600 | 39 | 22.5" 24" 28" | 50" | 14.9R24 12.4R28 | 380/85R24 320/85R28 | 420/70R24 360/70R28 | 480/65R24 420/65R28 | | | | 560/60R22.5 | 560/60R22.5 | 460/70R24 (17.5LR24) | 460/70R24 (17.5LR24) | |
| 625 | 40 | 24" 28" | 52" | 16.9R24 13.6R28 | 420/85R24 340/85R28 | 480/70R24 380/70R28 | 540/65R24 440/65R28 | | 270/95R32 | | 600/55R26.5 | | 500/70R24 (19.5LR24) | | |
| 650 | 40 | 28" 32" | 53" | 14.9R28 12.4R32 | 380/85R28 320/85R32 | 420/70R28 | 480/65R28 | | | | 650/55R26.5 710/50R26.5 | 600/55R26.5 650/55R26.5 710/50R26.5 | | | |
| 675 | 41 | 26.5" 28" 30" | 55" | 16.9R28 14.9R30 | 420/85R28 380/85R30 | 480/70R28 | 540/65R28 | 600/65R28 | | 750/50R26 | 800/45R26.5 605/70R20.5 | | | | 440/80R38 |
| 700 | 42 | 30" 36" | 57" | 16.9R30 12.4R36 | 420/85R30 320/85R36 | 480/70R30 | 540/65R30 | VF600/65R28 VF600/60R30 | | VF500/85R24 | 710/50R30.5 | | | | 540/65R30 |
| 725 | 42 | 30" 36" | 60" | 18.4R30 13.6R36 | 460/85R30 340/85R36 | 520/70R30 | | 600/70R28 | 420/90R30 270/95R38 | | 600/60R30.5 | | | | |
| 750 | 43 | 26" 30" 34" 38" | 61" | 14.9R34 16.9R34 13.6R38 14.9R38 | 380/85R34 420/85R34 340/85R38 380/80R38 | 480/70R34 | 540/65R34 | 600/70R30 VF600/70R30 | | 620/75R26 | | | | | |
| 775 | 44 | 26" 30.5" 34" | 65" | 18.4R34 | 460/85R34 | 520/70R34 | 600/65R34 | 650/65R34 VF650/65R34 | | 750/65R26 | 650/65R30.5 | | | | |
| 800 | 44 | 25" 26" 30" 38" | 66" | 16.9R38 | 420/85R38 | 480/70R38 | 540/65R38 | | 230/95R48 | 620/75R30 750/65R26 1000/50R25 | 750/60R30.5 | | | | |
| 825 | 45 | 32" 38" | 69" | 18.4R38 | 460/85R38 | 520/70R38 | 600/65R38 | | | 650/75R32 | | | | | 480/80R38 |
| 875 | 46 | 32" 38" 42" 46" | 73" | 20.8R38 18.4R42 | 520/85R38 460/85R42 460/85R42 | 580/70R38 | 650/65R38 | VF710/60R38 | 320/90R46 380/90R46 340/85R46 270/95R48 | 1050/50R32 800/65R32 | | | | | |
| 925 | 47 | 32" 42" 46" 50" | 77" | 20.8R42 18.4R46 | 520/85R42 480/80R46 | 620/70R42 | 650/65R42 VF650/65R42 | 710/70R38 VF710/60R42 | 420/80R46 900/90R50 VF380/90R46 | 900/60R32 800/70R32 710/75R34 | | | | | 650/65R42 |
| 975 | 48 | 32" 38" 42" 46" 50" | 81" | 20.8R46 18.4R50 | 520/85R46 480/80R50 | 620/70R46 | | 650/85R38 800/70R38 710/70R42 650/75R38 VF710/70R42 | 380/90R50 380/105R50 300/95R52 320/90R54 | 1250/50R32 | | | | | |
| 1000 | 48 | 46" | 83" | | | | | VF710/65R46 | | | | | | | |
| 1025 | 49 | 42" 54" | 84" | 18.4R50 | 480/95R50 | | | 710/75R42 VF710/75R42 VF650/85R42 | 380/90R54 VF380/105R50 | | | | | | |

MAXAM AGRICULTURAL RADIAL TIRE LIMITED WARRANTY

The below Limited Warranty / Adjustment Policy ("Policy") is a commitment of tire replacement under certain specified conditions as provided below:

This warranty policy applies to all MAXAM radial agricultural tires as specified below and does not require the existence of a defect to be considered eligible for an adjustment.

TABLE 1: MAXAM AGRICULTURAL TIRE WARRANTY PRODUCT COVERAGE

| AGRICULTURAL USE (WORKMANSHIP & MATERIALS COVERAGE) | | STUBBLE DAMAGE OR FIELD HAZARD COVERAGE | | SCRAPER APPLICATIONS OR USE | |
|---|------|---|-------------|-----------------------------|-------------|
| Up to Eight Years | | Up to Five Years | | Up to Five Years | |
| Year 1 | 100% | Year 1 | 100% | Year 1 | 100% |
| Year 2 | 100% | Year 2 | 80% | Year 2 | 80% |
| Year 3 | 80% | Year 3 | 60% | Year 3 | 60% |
| Year 4 | 70% | Year 4 | 40% | Year 4 | 40% |
| Year 5 | 60% | Year 5 | 20% | Year 5 | 20% |
| Year 6 | 50% | Year 6 | No Coverage | Year 6 | No Coverage |
| Year 7 | 30% | Year 7 | No Coverage | Year 7 | No Coverage |
| Year 8 | 20% | Year 8 | No Coverage | Year 8 | No Coverage |

PLEASE NOTE: The warranty coverage is not intended for tires that become unserviceable due to intentional neglect or abuse.

A. PRODUCT ELIGIBILITY:

All MAXAM Brand – radial agricultural tires manufactured and/or sold after January 1, 2018, and distributed by MAXAM Tire as identified by the identification code and production date.

This policy applies to either the original owner or the user of the tires or the original purchaser of the agricultural equipment mounted with the tires ("customer").

The MAXAM agricultural products covered by this warranty policy are as belonging to the family of products: AGRIXTRA 85, AGRIXTRA 70, AGRIXTRA 65, AGRIXTRA XL, AGRIXTRA H, AGRIXTRA N, FLOTXTRA, AGILXTRA, TRACXTRA, & ROWXTRA.

B. STATUTE OF LIMITATIONS (ELIGIBILITY):

Warranty coverage is for a maximum period of eight years (96 months) from the date of purchase or no more than eight years (96 months) from the date of manufacture if purchase invoice is not provided. Tires must have at least 5/32" (4mm) of remaining tread depth.

MAXAM AGRICULTURAL TIRES FREE REPLACEMENT POLICY:

- First two years (24 months) and within 25% tread wear.
- Service allowance for tires covered under Free Replacement Policy:
 - Flat service fee reimbursement of \$75.00 per tire
 - Labor allowance of \$1.25 per 10mm of tire width (e.g. 480/80R42 = \$60)
 - Disposal allowance of \$.09 per lb. (e.g. 480/80R42 @ 344lb = \$30.96)

Beyond year 2 or 25% wear, credit will be pro-rated based on remaining tread depth up to a maximum credit amount as indicated in Table 1.

C. FIELD HAZARD AND STUBBLE DAMAGE COVERAGE.

The field hazard and stubble damage coverage is for a maximum period of five years (60 months) from the date of purchase, or no more than five years (60 months) from the date of manufacture if purchase invoice is not provided, with the cost coverage as detailed in Table 1. For tires acquired as part of original equipment acquisition a copy of the equipment purchase invoice must be provided. Stubble damage caused by penetrations are not covered by the stubble damage warranty.

For the tires to be considered eligible for a stubble damage claim, a mechanical system or device must be mounted on the vehicle capable of "pushing" down the stubble stalks ahead of the tires contacting the surface or soil. Claims will need proof of such device to substantiate the claim. The tire claimed must be completely unserviceable and not repairable. MAXAM will not provide any reimbursements for mounting or other service charges of any kind such as liquid ballasting or other type of tire fill.

Any stubble damage claims will be based on MAXAM's evaluation of the fulfillment of the customer's obligations for stubble damage coverage as provided. For claims that are accepted for tires that are unserviceable or not repairable due to a field hazard or approved stubble damage, the customer will receive a replacement credit towards the purchase of a replacement tire equal to the value provide below or in Table 1:

- Remaining Allowance Summary for Stubble Damage or Field Hazard: Period Tire Tread Depth Credit Available

| PERIOD | TIRE TREAD DEPTH | CREDIT AVAILABLE |
|--------------------|------------------|------------------|
| Year 1 (12 Months) | 90% or more | Up to 100% |
| Year 2 (24 Months) | 80% or more | Up to 80% |
| Year 3 (36 Months) | 60% or more | Up to 60% |
| Year 4 (48 Months) | 40% or more | Up to 40% |
| Year 5 (60 Months) | 20% or more | Up to 20% |

- If a tire's length of service cannot be correctly determined, the credit will be based upon the production date of the tire and remaining tread depth per the above table.
- The tire replacement credit will be paid out based on the above table and within the specific time by multiplying the servicing dealer's regular buying price (excluding tax) by the above approved percentage at the time of the tire replacement claim being processed.

D. CUSTOMER'S RESPONSIBILITY:

Qualification for application of the MAXAM Stubble Damage Warranty requires customer responsibility for the use and employment of common agricultural operating practices designed to reduce and/or mitigate the possible causes of stubble damage as provided below:

- Ensure the first tillage pass is parallel to the planting rows to avoid direct contact with the remaining stubble.
- Employ the use of mechanical or fixed devices designed to push down stubble or stalks before contacting the tires.

E. NON-ADJUSTABLE CONDITIONS:

- Premature tread wear out, overloading, under inflation, exceeding tire speed or load capabilities. Tire damage from improper mounting, demounting, damaged rim, rim slip, or imbalance. Chain damage, improper storage, improper repairs, sealants, ballast or filler material.
- Petroleum damage, extreme temperature exposure, mechanical damage, or from spinning.
- Use in logging or industrial operations.
- Fire, accident, theft, vandalism, or abuse.
- Tires in service for longer than eight years (96 months).
- Damages caused to tires during shipping or transport by third party carriers.

MAXAM AGRICULTURAL RADIAL TIRE LIMITED WARRANTY

F. LAND-LEVELING OR SCRAPING APPLICATION:

This limited warranty applies to conditions in workmanship and materials used on land leveling or scraping as provided below:

| COVERAGE PERIOD | CREDIT AVAILABLE |
|----------------------------|--|
| Up to 60 Months or 5 Years | With Appropriate Weight and Air Pressure Setting |
| Year 1 (12 Months) | Up to 100% |
| Year 2 (24 Months) | Up to 80% |
| Year 3 (36 Months) | Up to 60% |
| Year 4 (48 Months) | Up to 40% |
| Year 5 (60 Months) | Up to 20% |

MAXAM Tires covered under this policy: AGRIXTRA 85, AGRIXTRA 70, AGRIXTRA 65, & AGRIXTRA XL.

This limited warranty does not cover tires that are removed from service due to the following conditions:

- Unserviceable from poor maintenance or improper use.
- Tire failure due to overload.
- Tire failure due to operating with full power at speeds under 5 mph (8.0 km/h).
- Rim slip or bead leakage due to undersized rims deteriorated rims, or mis-mounting.
- Lug tearing or deterioration due to excessive cutting.
- Tire failure due to the use of incorrect inflation pressure.

MAXAM tires covered under this policy: AGRIXTRA 85, AGRIXTRA 70, AGRIXTRA 65, & AGRIXTRA XL. This limited warranty does not cover tires that are removed from service due to the following conditions:

Unserviceable from poor maintenance or improper use.

- Tire failure due to overload.
- Tire failure due to operating with full power at speeds under 5 mph (8.0 km/h).
- Rim slip or bead leakage due to undersized rims deteriorated rims or mis-mounting.
- Lug tearing or deterioration due to excessive cutting.
- Tire failure due to the use of incorrect inflation pressure.

MAXAM Recommended Scraping Tractors Tire Set Up:

- Tire size must be equal to or greater than the minimum required to transmit the full power of the tractor. Tire size must be an OEM approved tire combination for the tractor.
- Use the OEM's recommended tire sizes for scraper operations or apply the following rule: The maximum load per tire at full weight capacity considering maximum tractor speed, must be greater than the maximum load expected on any tire at any given time during the land leveling or scraping operation.
- Single or triple tire configurations are not recommended for scraping or land leveling (only exception are single tires mounted on the front axle of MFWD tractors).
- Tires used as duals must have their tire load weight limit reduced or adjusted by 12%.
- 4WD tractors should use vehicle weights (in lieu of tire ballast) so that 70% or more of the total static weight of the tractor is on the front axle without the scraper attachment.

- For 4WD tractors the use of ballast in the rear axle is NOT recommended. Liquid fill is NOT recommended for use as ballast and has adverse effects on tire life.
- For MFWD tractors should use the maximum amount of cast weight recommended by the OEM to ballast the front axle. Use the tractor OEM's technical recommendation for rear axle ballast.
- In all cases set the cold inflation air pressure based on the tractor's maximum speed and load to the MAXAM tire pressure table by size. If possible, the front axle of the tractor should be weighed without the scraper attachment.

G. ADJUSTMENT POLICY – GENERAL EXCLUSIONS:

Any MAXAM agricultural tires in service for longer than 8 years (96 months) from their date of purchase or service are not covered by the policy. Tires with less than 5/32" (4mm) remaining tread depth are not eligible for credit. In any case where the date of purchase cannot be confirmed, the tire's date of manufacture will be applied as the reference point for any warranty coverage. No MAXAM employee, retailer, dealer or wholesaler has the authority to make any policy changes to this warranty, nor make any promises or agreement on behalf of MAXAM except as provided by this policy. Tire or tread wear out is not covered by this warranty policy as customer equipment, use, and driver habits are outside the scope of this policy. In addition, MAXAM does not warrant the tires for a predetermined length of service unless specified in writing as a commercial guarantee. The warranty policy is only applicable to MAXAM agricultural tires purchased through MAXAM Tire North America or MAXAM International dealers and customers

H. CUSTOMER LIMITATION OF REMEDY:

MAXAM Tire disclaims liability for all consequential and/or incidental damages in the use of MAXAM agricultural tires.

Some jurisdictions do not allow the exclusion of limitation of incidental or consequential damages, so the above limitation may not apply to each customer. This policy gives the customer certain rights, and the customer may also employ other rights, which vary from state to state or province to province.

I. MANUFACTURER'S OBLIGATIONS TO THE CUSTOMER:

Any MAXAM agricultural tire, MAXAM OTR tire dealer, or equipment dealer is authorized to handle the processing of a MAXAM warranty adjustment.

MAXAM Tire will replace any tires that meet the criteria as outlined by the terms of this policy.

J. CUSTOMER'S OBLIGATIONS:

To place a claim for any MAXAM agricultural tires, the customer must present the claim to any MAXAM authorized representative.

Using the MAXAM agricultural claim form, the requested claim must be signed by the customer or the dealer as his representative and include the dealer replacement sales receipt for any replacement tires.

The customer is fully responsible for the payment of all applicable state or provincial taxes, the demounting / mounting and balancing of all tires to include the vehicle alignment, tire repair, valve or valve stem replacement, any towing or required road service provided.

The customer will make any claimed tire available for inspection or will coordinate with MAXAM for return shipment to MAXAM upon request. If return shipment is requested, MAXAM will bear all shipping costs and provide Return Goods Authorization and arrange pickup.

MAXAM will respond to the customer within 30 days of a claim if a request is not made for the return of the tire. If a request is made for the return of the tire, MAXAM will respond to the customer within 30 days of receiving the returned tire.



MAXAM OTR RADIAL & BIAS PRODUCT WARRANTY

LIMITED WARRANTY

The following warranty contains certain rights and obligations that pertain to MAXAM branded Off-The-Road (OTR), Industrial, Construction, Bias Agricultural, large Mining tires and Forestry tires. Please review these rights and obligations carefully.

DEFINITION

This Limited Warranty covers all MAXAM branded Off-The-Road (OTR), Industrial, Construction, large Mining tires, Bias Agricultural and Forestry tires as designated in MAXAM OTR and AG product listings (price books, catalogs and leaflets). This does not apply to used, DA, or "NA" (not adjustable) tires.

ELIGIBILITY

Every tire bearing the name MAXAM and with a complete serial number moulded in the sidewall is warranted to be free from manufacturing defects within the manufacturer's control. If an examination by an authorized MAXAM representative shows that any such tire failed as a result of manufacturing defects, it will, at the option of MAXAM, either be repaired at no charge, or a credit will be issued toward the purchase price of a replacement tire, being a comparable MAXAM OTR product. This credit will be determined by applying the lesser of the percentage of remaining tread depth (RTD%) and the maximum age based credit shown in the following chart. The replacement percentage will be multiplied by the original purchase price of the tire (excluding any taxes or duties) to determine the amount of credit to be applied. Customer is responsible for the disposal of all adjusted tires. This warranty coverage is for tires used within published designed specifications for MAXAM tires. To be eligible for warranty, the tire must have at least 5/32nds (4mm) of remaining tread. The customer will make any claimed tire available for inspection or will coordinate with MAXAM for return shipment to MAXAM upon request. If return shipment is requested, MAXAM will bear all shipping costs and provide Return Goods Authorization and arrange pickup. Any use outside such specifications automatically voids this warranty. Please consult MAXAM technical leaflets, etc. for design specifications.


TIME PERIOD

This warranty applies for a maximum period of five years (60 months) from date of tire purchase. If no invoice or documentation of the tire purchase can be provided, the date of tire manufacture will be used. The date of manufacture can be determined by the first six digits in the serial number code.

LIMITATIONS

This Limited Warranty is applicable to the original purchaser and is not assignable to subsequent purchasers. No MAXAM dealer, agent, or representative has the authority to make or imply any representation, promise or agreement which in any way varies or extends the terms of this warranty.

AMOUNT OF CREDIT TO CUSTOMER FOR MANUFACTURING DEFECTS

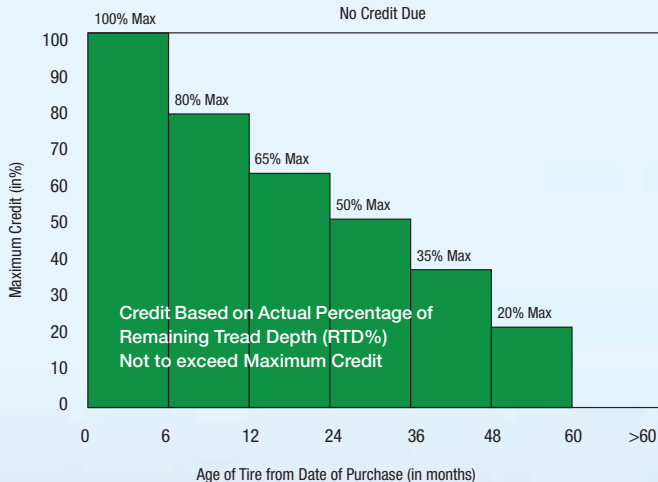

Any tire, no matter how well manufactured, may fail in service or become unserviceable due to conditions beyond the control of the manufacturer. This Limited Warranty is under no circumstances a representation that a tire failure cannot occur. This limited warranty gives you specific rights and you may also have other rights which may vary from jurisdiction to jurisdiction. To the extent that the provisions of any applicable legislation expressly replace, eliminate, amend or prohibit any term or terms contained herein, such term or terms shall be accordingly replaced, eliminated, amended or extended, as the case may be, in accordance with such legislation.

LIMITED WARRANTY EXCLUSIONS

ALL OTR TIRES AND TUBES

All OTR/AG warranties are subject to the following exclusions:

1. Tire claims submitted more than 60 months from the date of purchase.
2. Tires for which alternative warranties or guarantees have been negotiated.
3. Tires with less than 5/32nds (4mm) remaining tread depth.
4. Tire used under chains. MAXAM does recognize that in many applications tire chains provide enhanced tire protection and may extend tire life. In these cases, MAXAM may extend special negotiated warranties. Please consult your MAXAM representative for details.
5. Damage resulting from misuse, improper mounting, misapplication, use of non-approved rims, improper inflation, overloading, running flat, misalignment or imbalance of wheels/rims, defective brakes or shock absorbers, abuse, wilful damage, oil, chemical action, fire or other externally generated heat, use of studs, water or other material entrapped inside the tire, vehicle damage or road hazards (such as rock cuts, punctures, cut separations, impacts, flex breaks).
6. Claims for irregular wear or rapid tread wear are not covered by this limited warranty.
7. Any tire which is operated above its Ton-Mile per Hour (TMPH) or Tonne-Kilometer per Hour (TKPH) rating.
8. Tires mounted with tubes or o-rings not approved by MAXAM.
9. Repaired or Retreaded tires.
10. Any modifications to the tire (added buttress shoulders, re-grooving, re-lugging, etc.) void all warranties.
11. Any material added to the tire (tire fill, sealer, balancer, etc.) is not covered by this limited warranty and will not be compensated for in case of credit being issued for the tire.
12. Use of a solid type fill (such as urethane) voids all warranties.
13. Any costs associated with the repair of tires are not covered unless previously approved by MAXAM.
14. Costs of mounting and balancing following pro-rated replacement or repair of tires or tubes and applicable federal, state, provincial and local taxes, are not covered under this warranty.
15. Cost of disposal of warranted tires. Disposal of tires is the sole responsibility of the customer.
16. All other warranties, including the implied warranties of merchantability and fitness for a particular purpose, are expressly disclaimed to the extent permitted by law.
17. ALL OBLIGATIONS OR LIABILITIES FOR INDIRECT, INCIDENTAL, PUNITIVE OR CONSEQUENTIAL DAMAGE ARE HEREBY EXCLUDED TO THE EXTENT PERMITTED BY LAW, INCLUDING ECONOMIC LOSS, LOSS OF PROFIT, LOSS OF USE OF VEHICLE, LOSS OF TIME, PERSONAL INJURY OR DEATH.

TO OBTAIN WARRANTY SERVICE

1. Contact an authorized MAXAM dealer or representative. Please be prepared to provide proof of purchase of the product, purchase date and serial number.
2. The authorized dealer or representative will contact MAXAM to arrange the inspection of the tire in question and processing of your claim. The dealer has no authority or responsibility to make the determination as to eligibility for coverage under this warranty.



MAXAM TIRE NORTH AMERICA INC.

300 Rosewood Drive, Suite 102
Danvers, MA 01923, USA
T:1-844-MAXAM-NA | F:978-560-0624

MAXAM INTERNATIONAL LIMITED Grosser

Hasenpfad 30
D-60598
Frankfurt am
Main, Germany

MAXAMTIRE.COM

v2024

