

RUBBER TRACKS



Heavy-duty Compound

- Cut and tear resistant
- Heavy duty carcass

Metal Embeds

- Optimized fit per application
- Carcass Reinforcement


Continuous Steel Cords

- Provides strength and rigidity
- Coated to resist corrosion

Track Size Breakdown

Example: 320x86x52

Width (mm)	Pitch (mm)	Links
320	86	52

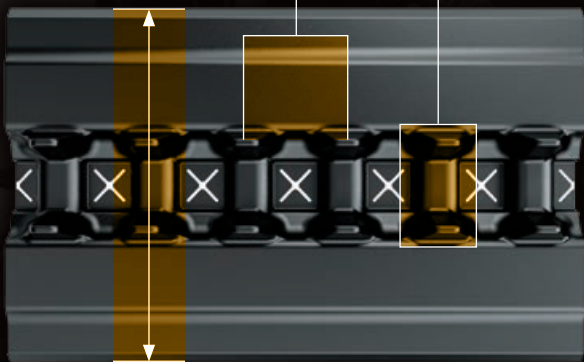

MAXAM

TOOLS AND RESOURCES



TRACK FINDER

Find the right track by selecting the equipment type, make and model.



GROUND PRESSURE CALCULATOR

Review one track or multiple tracks and compare the estimated ground pressure of each width.

Download the MAXAM App




MAXAM Tire's dedicated team of engineers, local sales representatives, along with manufacturing and distribution partners continuously analyze the market to ensure our product portfolio meets the requirements of today's market, and your customers. Complete customer satisfaction is the ultimate goal of MAXAM Tire, driving our desire to continuously innovate and deliver quality products. With confidence and pride, we stand behind our reputation for delivering exceptional product quality, reliability, performance, and value.

MAXAM TIRE
300 Rosewood Drive, Suite 102.
Danvers, MA 01923 USA
T.844-MAXAM-NA | F.978-560-0624
MAXAMTIRE.COM

MAXAM

CONQUER EVERY TERRAIN

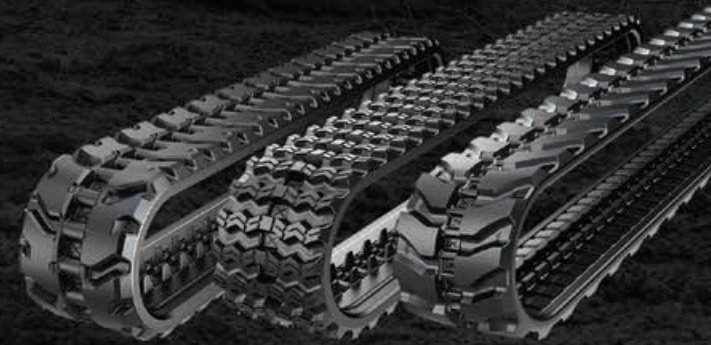

RUBBER TRACKS

MAXAMTIRE.COM

RUBBER TRACKS

Engineered to perform in the most extreme conditions, our tracks are meticulously manufactured to achieve unparalleled quality and performance. Featuring corrosion-resistant continuous steel cords, optimized metal embeds, and a cut and tear-resistant compound, our rubber tracks' heavy-duty tread lugs deliver the utmost flotation and traction.

MT130

Concrete, Demolition, Dirt, Mud, Rock
NOT RECOMMENDED FOR SNOW



H-LUG

MT150

Clay, Mud, Slippery Slopes, Snow, Wet Surfaces
NOT RECOMMENDED FOR DEMOLITION OR TURF



Z-LUG

MT170

General Purpose, adaptable
to multiple surface conditions



MINI-EX

Width (mm)	Pitch (mm)	Number of Links
180	72	39, 40, 42, 44, 45
320	86	45, 47, 49, 50, 52, 53, 55
400	86	49, 50, 52, 53, 55, 56, 60
450	86	52, 53, 55, 56, 58, 60, 62, 63

Width (mm)	Pitch (mm)	Number of Links
320	86	45, 47, 49, 50, 52, 53, 55
400	86	49, 50, 52, 53, 55, 56
450	86	52, 53, 55, 56, 58, 60, 63

Width (mm)	Pitch (mm)	Number of Links
180	72	36, 37, 39, 40
300	52.5	74, 76, 78, 80, 82, 84, 86, 88, 90
350	54.5, 55	86, 88
400	72.5	74, 76

WARRANTY: Compact Track Loader Tracks 1,000 hours or 12 months whichever comes first. Mini Excavator Rubber Tracks 1,500 hours or 18 months whichever comes first.
For complete size list, technical data and warranty details please visit: maxamtire.com